

---

# WEAP

Water Evaluation And Planning System

# Tutorial

A collection of stand-alone modules to aid in learning  
the WEAP software

November 2005



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.sei.org/weap>



---

# WEAP

Water Evaluation And Planning System

# Tutorial Overview

<i>Introduction</i> .....	4
<i>Background</i> .....	4
<i>WEAP Development</i> .....	5
<i>The WEAP Approach</i> .....	5
<i>Program Structure</i> .....	6
<i>The Tutorial Structure</i> .....	11

November 2005



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.sei.org/weap>

# Introduction

WEAP® is a microcomputer tool for integrated water resources planning. It provides a *comprehensive, flexible and user-friendly* framework for policy analysis. A growing number of water professionals are finding WEAP to be a useful addition to their toolbox of models, databases, spreadsheets and other software.

This overview summarizes WEAP's purpose, approach and structure. The contents of the WEAP tutorial are also introduced; the tutorial is constructed as a series of modules that takes you through all aspects of WEAP modeling capabilities. Although the tutorial itself is built on very simple examples, it covers most aspects of WEAP. A more complex model presenting those aspects in the context of a real situation is included with WEAP under the name "Weeping River Basin". A detailed technical description is also available in a separate publication, the *WEAP User Guide*.

# Background

Many regions are facing formidable freshwater management challenges. Allocation of limited water resources, environmental quality, and policies for sustainable water use are issues of increasing concern. Conventional supply-oriented simulation models are not always adequate. Over the last decade, an integrated approach to water development has emerged that places water supply projects in the context of demand-side issues, water quality and ecosystem preservation.


WEAP aims to incorporate these values into a practical tool for water resources planning. WEAP is distinguished by its integrated approach to simulating water systems and by its policy orientation. WEAP places the demand side of the equation - water use patterns, equipment efficiencies, re-use, prices and allocation - on an equal footing with the supply side - streamflow, groundwater, reservoirs and water transfers. WEAP is a laboratory for examining alternative water development and management strategies.

WEAP is comprehensive, straightforward, and easy-to-use, and attempts to assist rather than substitute for the skilled planner. As a database, WEAP provides a system for maintaining water demand and supply information. As a forecasting tool, WEAP simulates water demand, supply, flows, and storage,

and pollution generation, treatment and discharge. As a policy analysis tool, WEAP evaluates a full range of water development and management options, and takes account of multiple and competing uses of water systems.

## WEAP Development

The Stockholm Environment Institute provided primary support for the development of WEAP. The Hydrologic Engineering Center of the US Army Corps of Engineers funded significant enhancements. A number of agencies, including the World Bank, USAID and the Global Infrastructure Fund of Japan have provided project support. WEAP has been applied in water assessments in dozens of countries, including the United States, Mexico, Brazil, Germany, Ghana, Burkina Faso, Kenya, South Africa, Mozambique, Egypt, Israel, Oman, Central Asia, Sri Lanka, India, Nepal, China, South Korea, and Thailand.

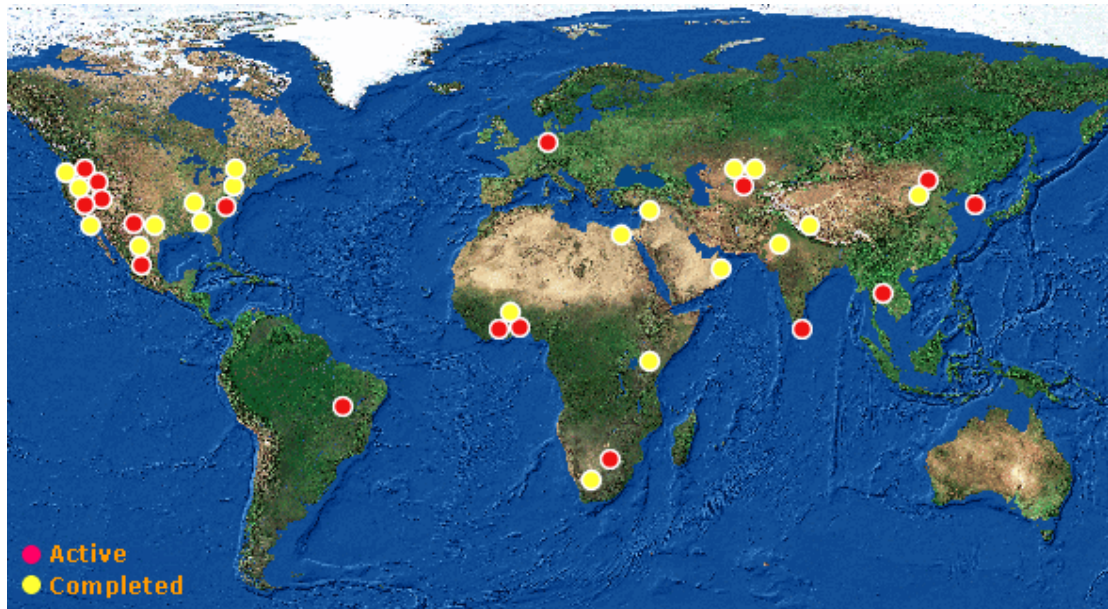

## The WEAP Approach

Operating on the basic principle of a water balance, WEAP is applicable to municipal and agricultural systems, single catchments or complex transboundary river systems. Moreover, WEAP can address a wide range of issues, *e.g.*, sectoral demand analyses, water conservation, water rights and allocation priorities, groundwater and streamflow simulations, reservoir operations, hydropower generation, pollution tracking, ecosystem requirements, vulnerability assessments, and project benefit-cost analyses.

The analyst represents the system in terms of its various supply sources (*e.g.*, rivers, creeks, groundwater, reservoirs, and desalination plants); withdrawal, transmission and wastewater treatment facilities; ecosystem requirements, water demands and pollution generation. The data structure and level of detail may be easily customized to meet the requirements of a particular analysis, and to reflect the limits imposed by restricted data.


WEAP applications generally include several steps. The *study definition* sets up the time frame, spatial boundary, system components and configuration of the problem. The *Current Accounts*, which can be viewed as a calibration step in the development of an application, provide a snapshot of actual water demand, pollution loads, resources and supplies for the system. Key assumptions may be built into the Current Accounts to represent policies, costs and factors that affect demand, pollution, supply and hydrology. *Scenarios* build on the Current Accounts and allow one to explore the impact of alternative assumptions or policies on future water availability and use. Finally, the scenarios are *evaluated* with regard to water sufficiency, costs and benefits, compatibility with environmental targets, and sensitivity to uncertainty in key variables.

## Program Structure

WEAP consists of five main views: Schematic, Data, Results, Overviews and Notes. These five views are presented below.


### Schematic:

This view contains GIS-based tools for easy configuration of your system. Objects (e.g., demand nodes, reservoirs) can be created and positioned within the system by dragging and dropping items from a menu. ArcView or other standard GIS vector or raster files can be added as background layers. You can quickly access data and results for any node by clicking on the object of interest.

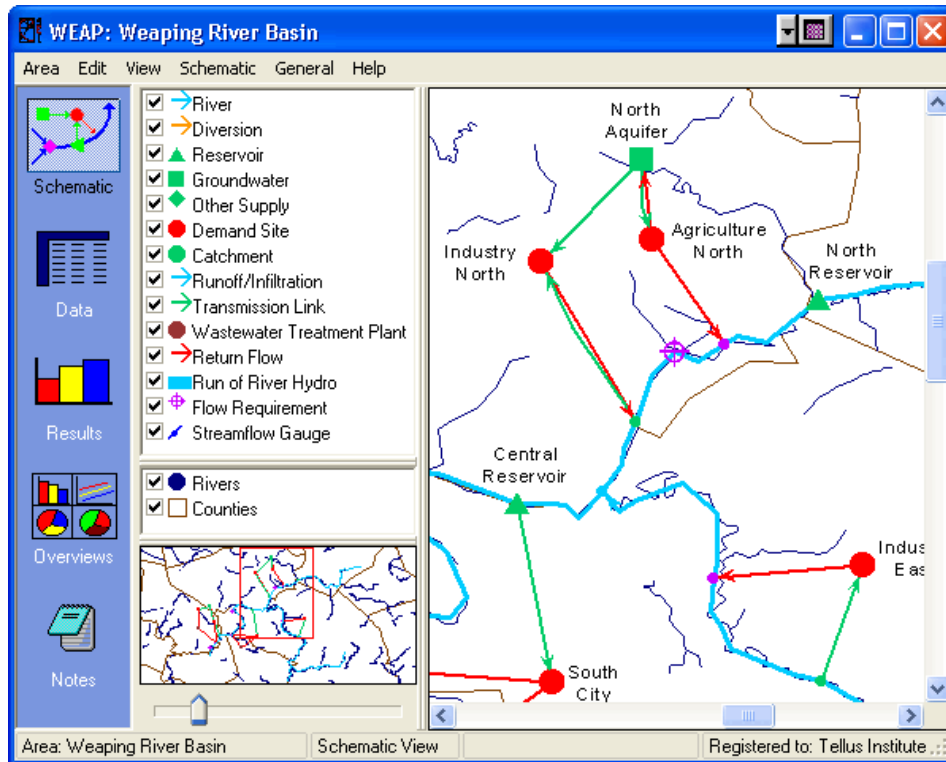

## Data:



The Data view allows you to create variables and relationships, enter assumptions and projections using mathematical expressions, and dynamically link to Excel.

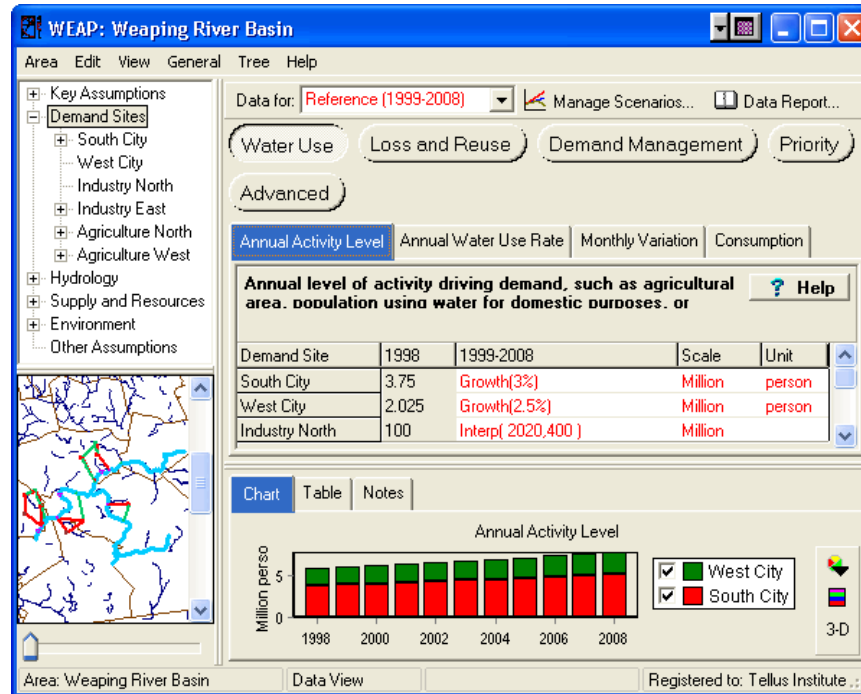




**Results:**

The Results view allows detailed and flexible display of all model outputs, in charts and tables, and on the Schematic.

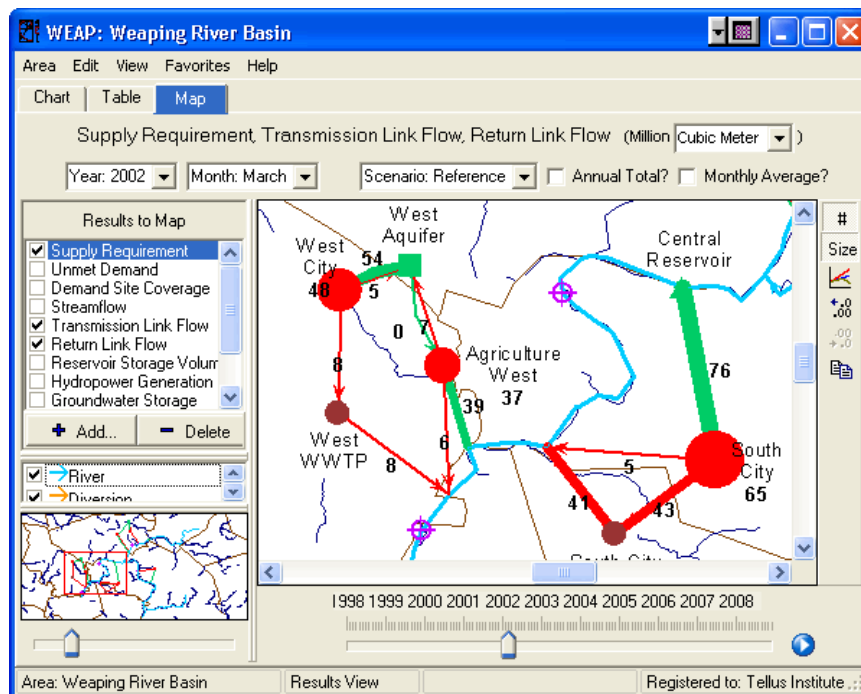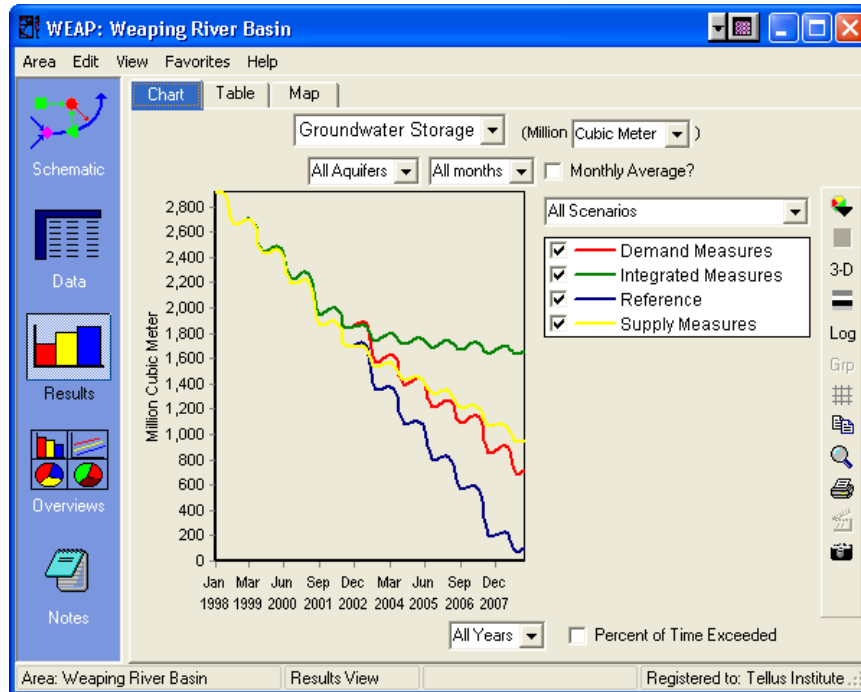


**Overviews:**

You can highlight key indicators in your system for quick viewing.

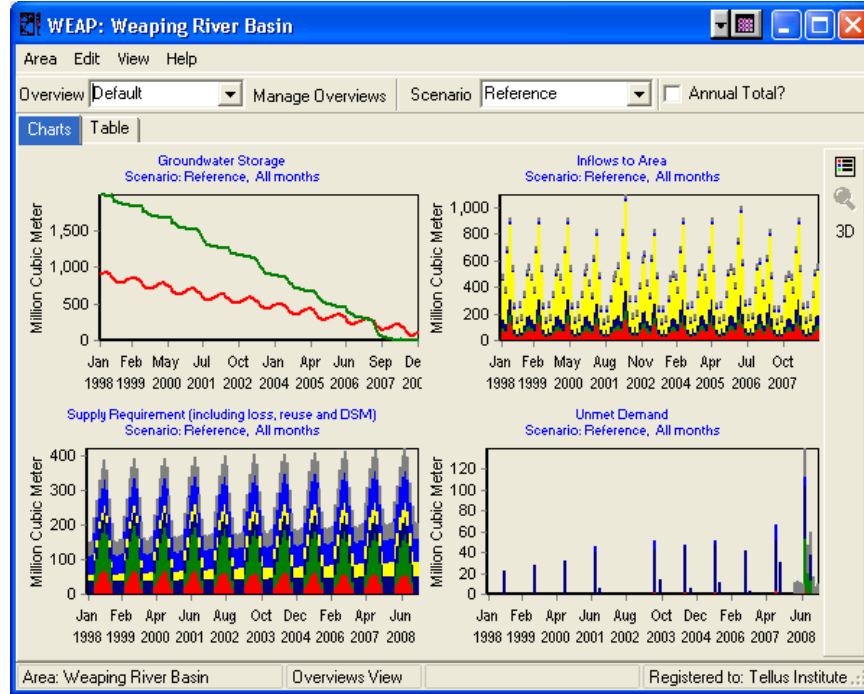

**Notes:**


The Notes view provides a place to document your data and assumptions.

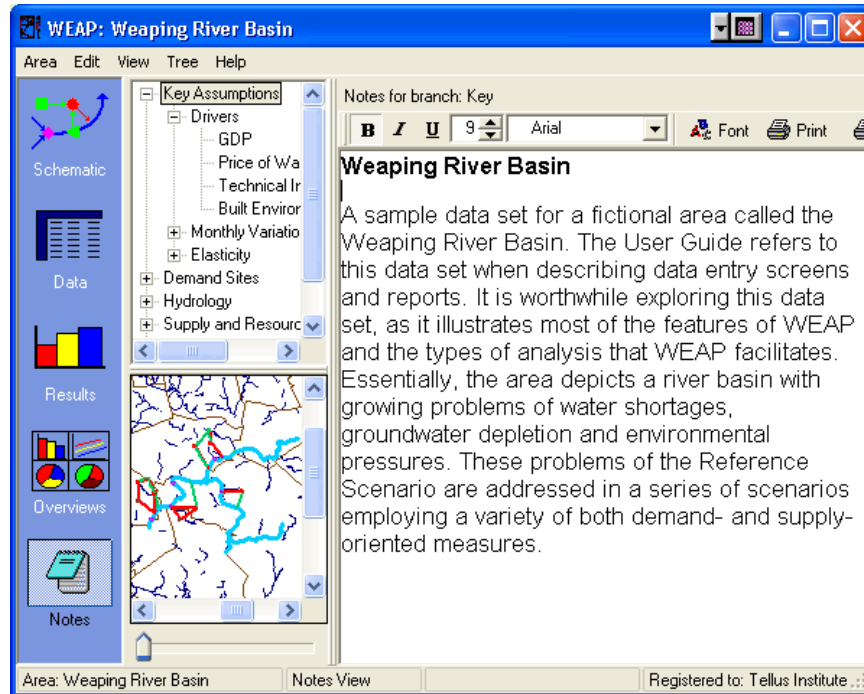

# The Tutorial Structure

This complete tutorial guides you through the wide range of applications that can be covered with WEAP. The first three modules (WEAP in one hour, Basic Tools and Scenarios) present the essential elements needed for any WEAP modeling effort. The other modules present refinements that may or may not apply to your situation.

Aside from the three basic modules, the tutorial modules are designed in a way that they can be completed in any order and independently, as you see fit. They all start with the same model that you will create after completing the first three modules.

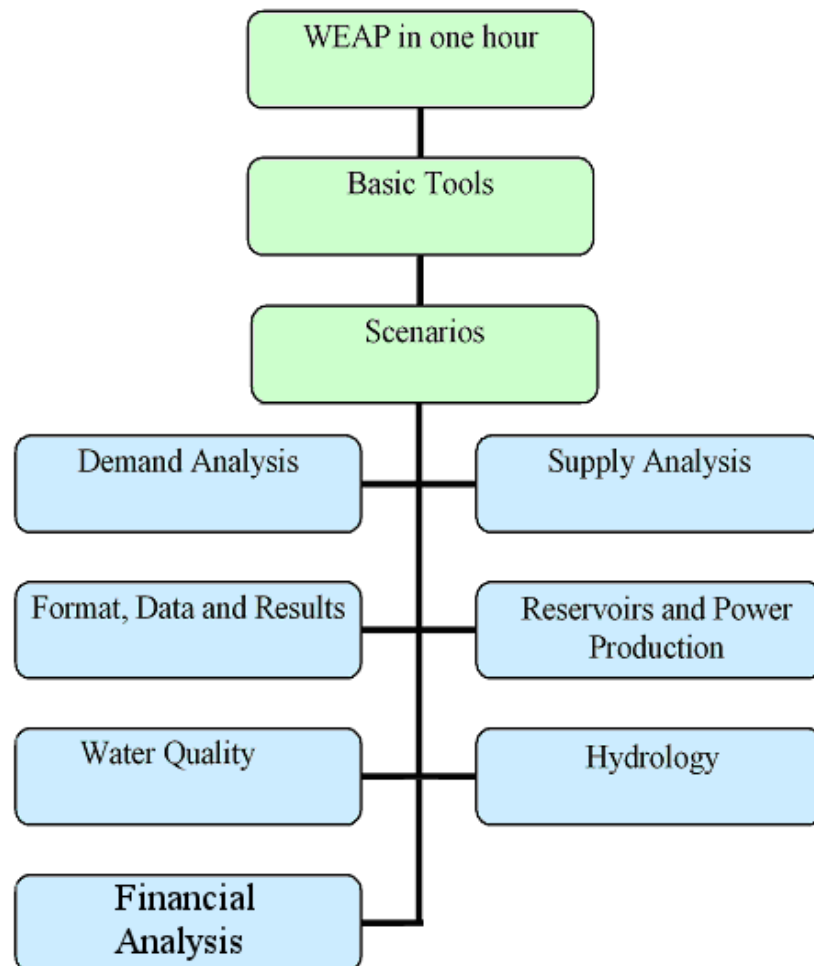

Below is a list of all modules, starting with the three basic modules; the bulleted points indicate the aspects covered in each module.

***WEAP in one hour***

- Creating a Study Area
- Setting General Parameters
- Drawing the Model
- Getting first Results

***Basic Tools***

- Creating and Using Key Assumptions
- Using the Expression Builder

***Scenarios***

- Preparing the Ground for Scenarios
- Creating the Reference Scenario
- Creating and Running Scenarios
- Using the Water Year Method

***Refining the Demand Analysis***

- Disaggregating Demand
- Modeling Demand Side Management, Losses and Reuse
- Setting Demand Allocation Priorities

***Refining the Supply***

- Changing Supply Priorities
- Modeling Reservoirs
- Adding Flow Requirements
- Modeling Groundwater Resources

***Format, Data and Results***

- Exchanging Data
- Importing Time Series
- Working with Results

- Formatting

### ***Reservoirs and Power Production***

- Modeling Reservoirs
- Adding Hydropower Computation
- Modeling Run-of-River Power Plants

### ***Water Quality***

- Setting up Quality Modeling
- Entering Water Quality Data
- Using Water Quality Inflow Constraints
- Entering Pollution Generation Data for Demand Sites
- Modeling a Wastewater Treatment Plant

### ***Hydrology***

- Modeling Catchments: the Rainfall Runoff Model
- Modeling Catchments: the Soil Moisture Model
- Simulating Surface Water-Groundwater Interaction



---

# WEAP


Water Evaluation And Planning System

# WEAP in One Hour

## *A TUTORIAL ON*

<i>Creating a New, Blank Study Area .....</i>	<i>16</i>
<i>Setting General Parameters .....</i>	<i>20</i>
<i>Entering Elements into the Schematic.....</i>	<i>23</i>
<i>Getting first Results.....</i>	<i>36</i>

**November 2005**




**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.sei.org/weap>


# Creating a New, Blank Study Area

## 1. Establish a New, Blank Area.

You are now going to practice creating a new, blank area. When you open WEAP for the first time, a project area called “Weaping River Basin” will appear. Use the Area, Create Area menu option to make a new, blank area.

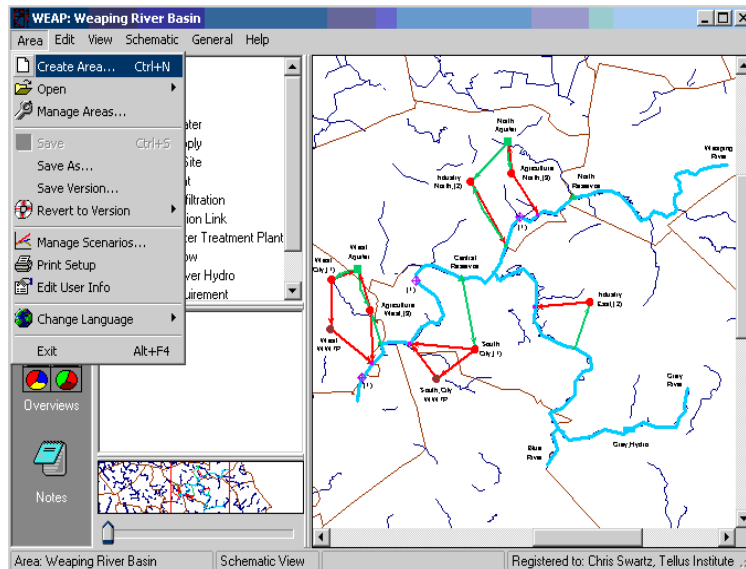


A window, as shown below, will appear in which you should click on the “Initially Blank” option. In the next steps, you will be defining this area for a specific geographic area of the world - so you can name the area based on this selection if you like (e.g., My\_Ghana\_Area).

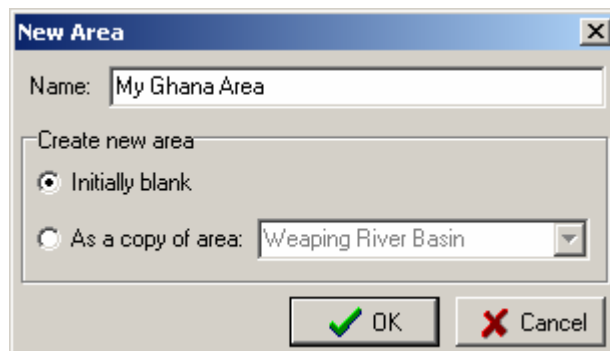


After clicking “OK”, you will get the following screen:




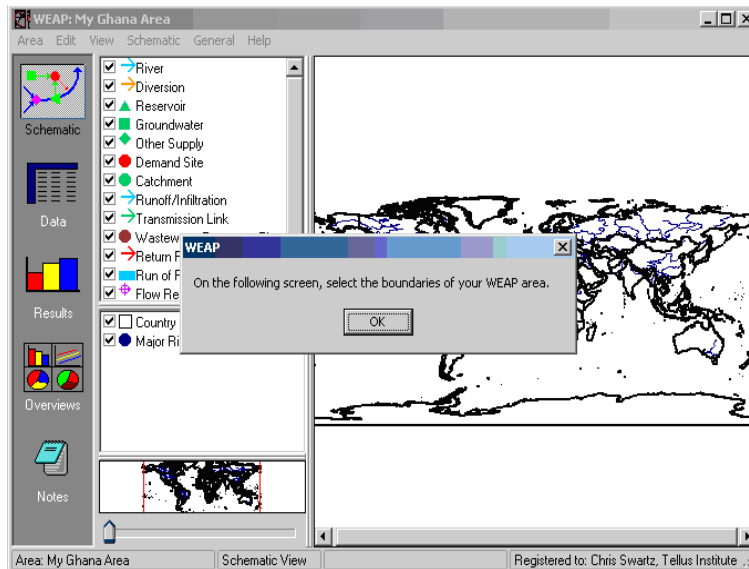


Click “OK” again. In the next screen, you will select the geographic area for your project from the world map that appears. Click once where you want to begin drawing a rectangle around the area that your project will represent. A green rectangle will appear around the area selected.

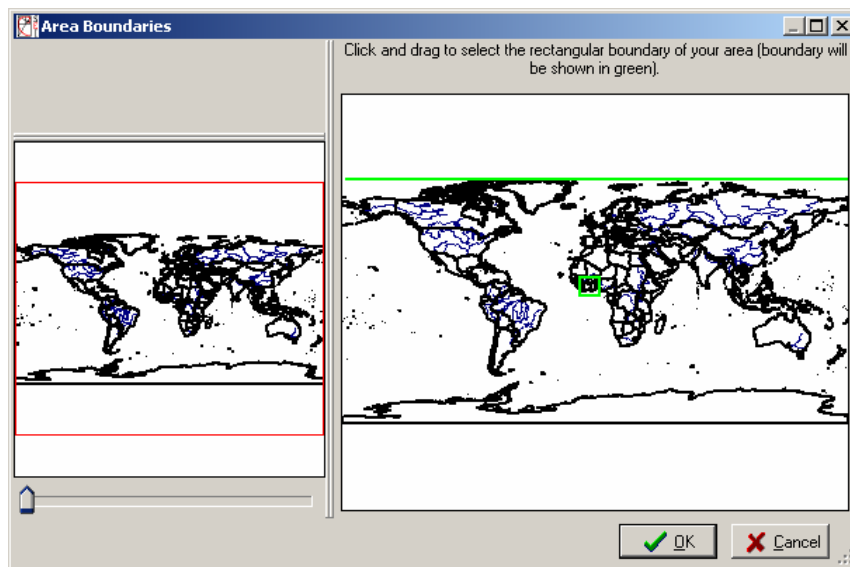

You can then use the slider bar on the lower left of the window to zoom into this selected area.

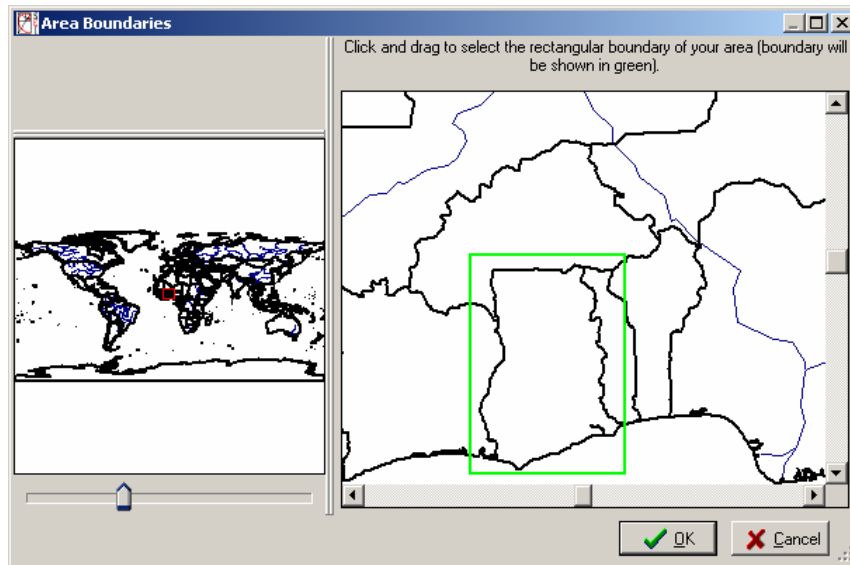

Click on “OK” when you are satisfied with your area boundaries. Note that you can modify these boundaries later by choosing “Set Area Boundaries” on the pull-down menu under Schematic on the top menu bar.

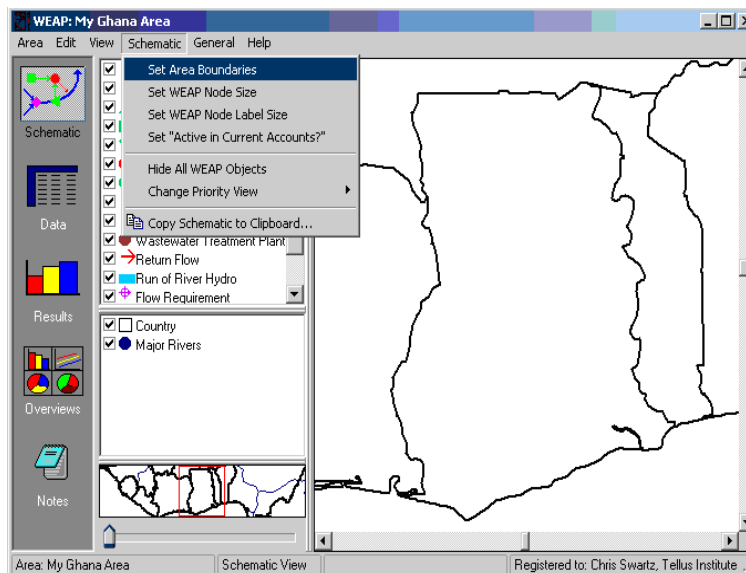

In WEAP, models are called “areas”.




Areas are limited by boundaries, which define the extent of the project area. If you create a new area by copying an existing one, the boundary is kept identical to that of the existing area. To modify boundaries once you have established a New Area, go to Schematic on the menu, and choose “Set Area Boundaries.”

Note that if you want to start with a “blank” area, you can use the steps above to select a geographic area over one of the oceans instead of a land mass.

## 2. Add a GIS layer to the Area

You can add GIS-based Raster and Vector maps to your project area - these maps can help you to orient and construct your system and refine area boundaries. To add a Raster or Vector layer, right click in the middle window to the left of the Schematic and select “Add a Raster Layer” or “Add a Vector Layer”.

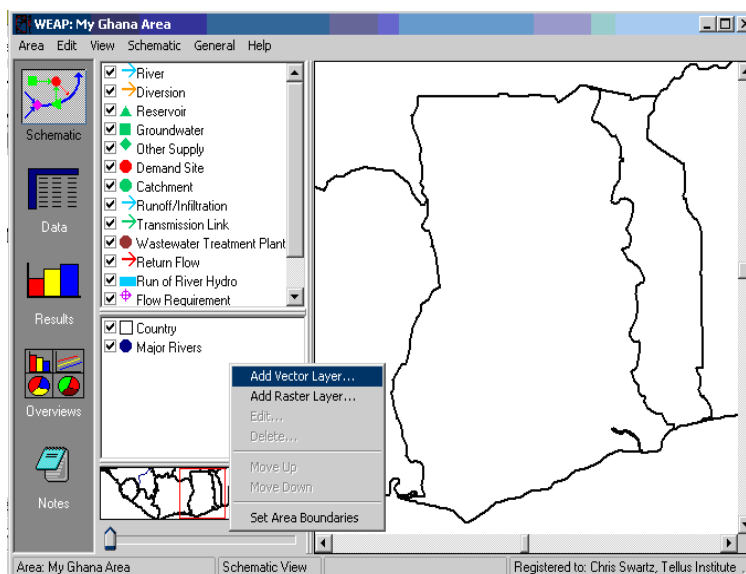

A window will appear in which you can input the name of this file and where WEAP can find it on your computer or on the internet.



Background vector data can be added by clicking “Add Vector Layer”. WEAP reads vector information in the SHAPEFILE format. This format can be created by most GIS software.

A large amount of georeferenced data (both in vector and raster format) is available on the Internet, sometimes for free; websites such as [www.geographynetwork.com](http://www.geographynetwork.com) or [www.terraserver.com](http://www.terraserver.com) provide good starting points for a search. Beware that some of the downloadable data might need GIS processing before being usable in WEAP,


---

especially to adapt the projection and/or coordinate system.

---

### 3. Saving an Area

If you want to save this Area for your own use later, Use the “Area”, “Save...” menu or press Ctrl+S.

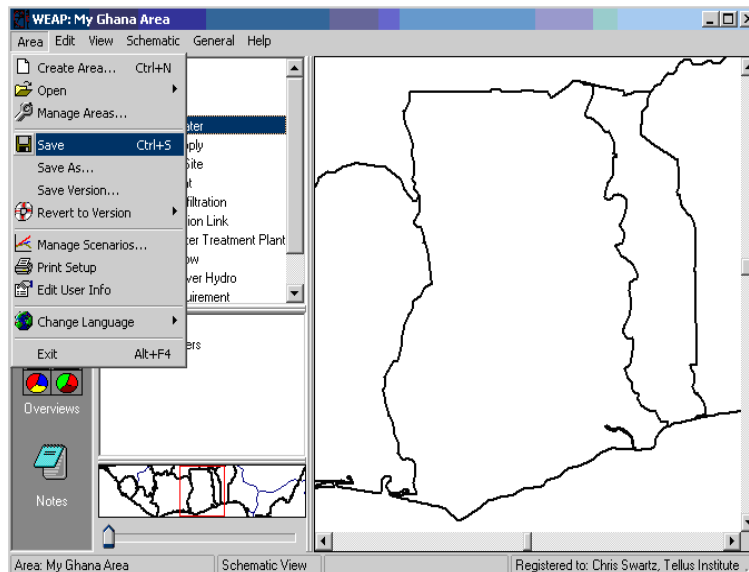

## Setting General Parameters

We are now going to proceed with learning how to navigate through WEAP and its functionalities. For the remaining exercises in this tutorial we will be using a pre-defined Area called “Tutorial”.

To open this Area, on the Main Menu, go to Area and select “Open”. You should see a list of Areas that includes “Tutorial” - select this Area.



### 1. Set the General Parameters

Once the Area opens, use the “General” menu to set Years and Time Steps and Units.

*Model the year 2000 with 12 time steps per year, based on calendar years and starting in January. Keep the default (SI units) for now. Set the period of time for which scenarios will be generated from 2000 to 2005.*



The year 2000 will serve as the “Current Accounts” year for this project. The Current Accounts year is chosen to serve as the base year for the model, and all system information (e.g., demand, supply data) is input into the Current Accounts. The Current Accounts is the dataset from which scenarios are built. Scenarios explore possible changes to the system in future years after the Current Accounts year. A default scenario, the “Reference Scenario” carries forward the Current Accounts data into the entire project period specified (here, 2000 to 2005) and serves as a point of comparison for other scenarios in which changes may be made to the system data. There will be a more detailed discussion of scenarios in an upcoming module.

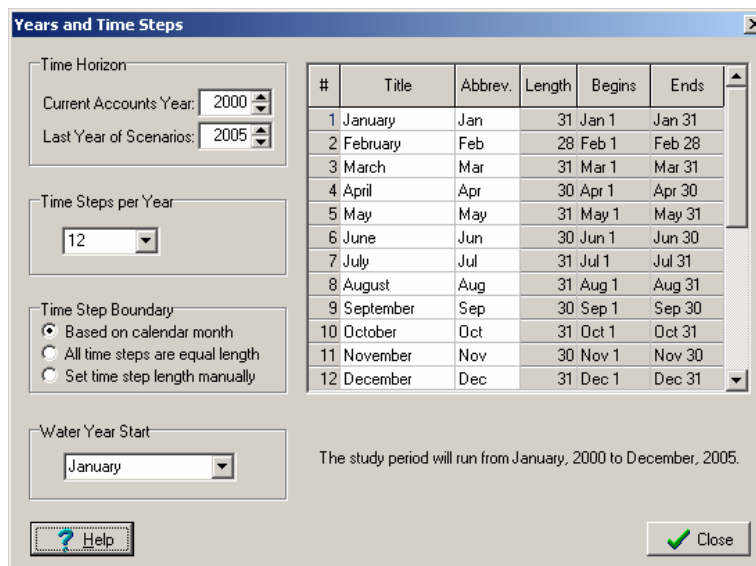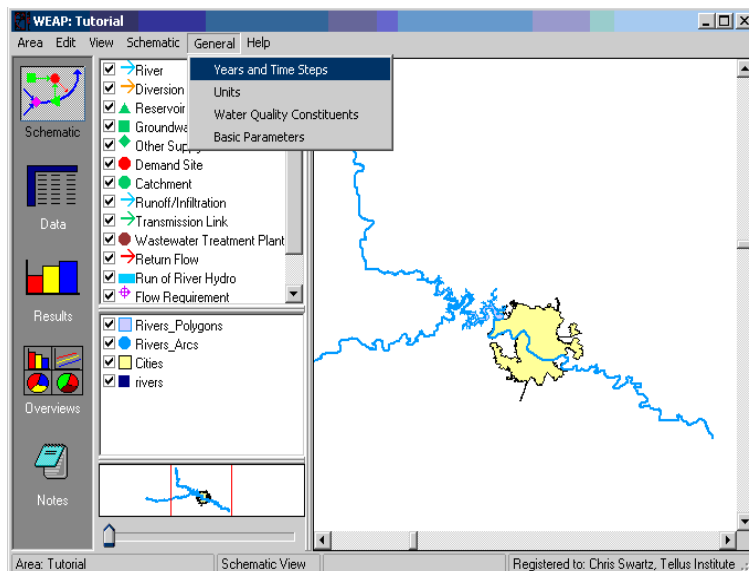




The time steps must be chosen to reflect the level of precision of the data available. A shorter time step will increase the calculation time, especially when several scenarios have to be calculated.

## 2. Save a version of your Area

Select “Save Version” under the “Area” menu. A window will appear asking for a comment to describe this version. Type “general parameters set”.

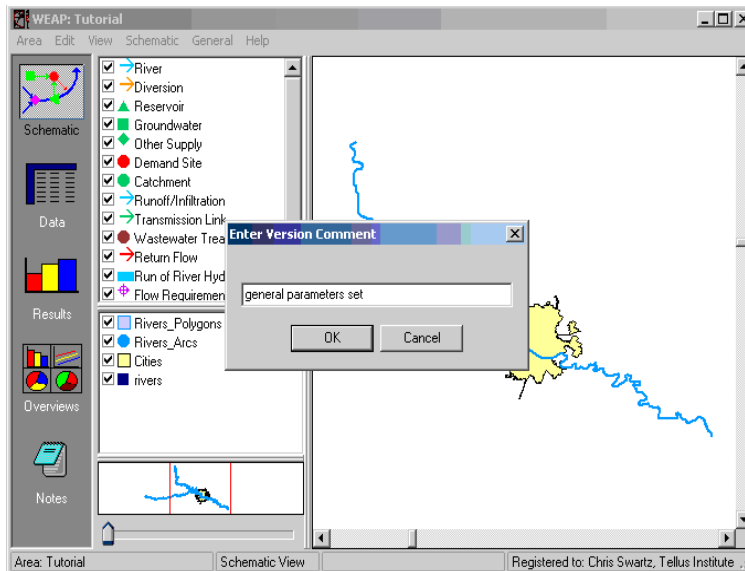

As with any other program, it is usually a good idea to regularly save your work in WEAP. WEAP manages all the files pertaining to an area for you. Saving a new area will automatically save the related files. The files are saved in the WEAP program installation folder. You can manage the areas, export and import them, back them up and send them per email using the Area..., Manage Areas menu.




WEAP also has a very convenient versioning feature that allow saving versions of a model within the same area. Use the “Area”, “Save Version...:” menu to save a version, and the “Area”, “Revert to Version” to switch to another version. You can switch between recent and older versions without losing data. WEAP will automatically create versions of your model every time you save. It is however better to manually create a version of a status you really want to keep since WEAP will eventually delete old automatic versions to save disk space, keeping only a few.

# Entering Elements into the Schematic

## 3. Draw a River


Click on the “River” symbol in the Element window and hold the click as you drag the symbol over to the map. Release the click when you have positioned the cursor over the upper left starting point of the main section of the river. Move the cursor, and you will notice a line being generated from that starting point.

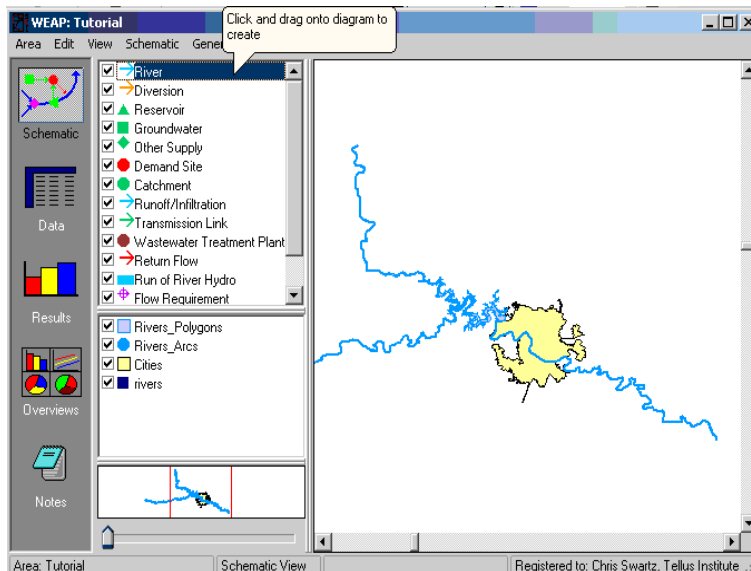

The direction of drawing matters: the first point you draw will be the head of the river from where water will flow. You can edit the river course later on by simply clicking-moving any part of the river to create a new point, or right-clicking any point to delete it.


*Follow the main river, drawing from the upstream (upper left) to the downstream (lower right), clicking once to end each segment that you draw. You can follow the line of the river as closely as you like, or you can draw a less detailed representation (below). Note though, that how closely you follow the actual course of the river will have implications for the performance of certain functionalities in WEAP. For example, if you plan to model water quality parameters along the river, it would be advantageous to construct the river element as closely as possible to the actual river course, because WEAP will*

*need to calculate residence times in the river (a function of reach lengths) to perform water quality simulations. Zooming in on the river (using the zooming bar in the lower schematic window) can help if you want to follow the rivers path more closely. You do not need to draw a river on the branch coming horizontally from the left. You can also adjust the river later if you want to add more detail.*

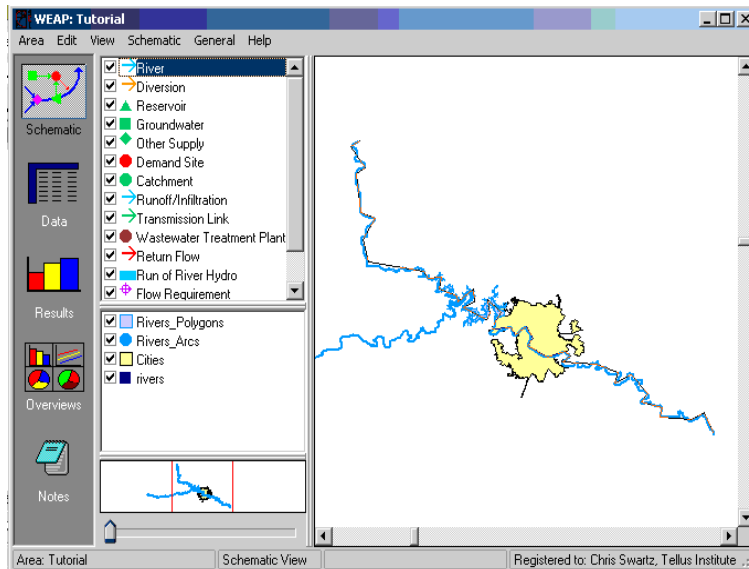

When you double click to finish drawing the river, a dialog box appears for naming the river (see below).


*Name the river "Main River".*

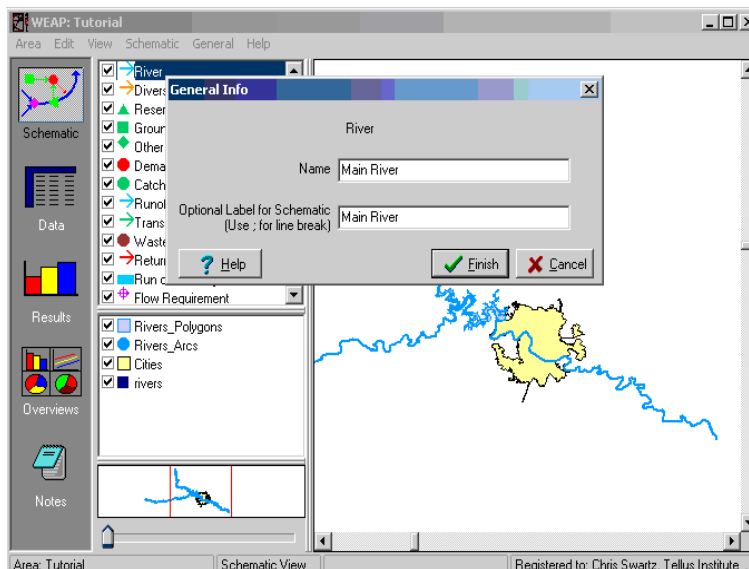




You may also enter an optional label for the schematic presentation (a shorter label can help to keep the schematic from becoming cluttered).

You can move the river label to another location by right clicking anywhere on the river and selecting "Move Label". The label will follow the cursor - single click when the label is in the desired location.

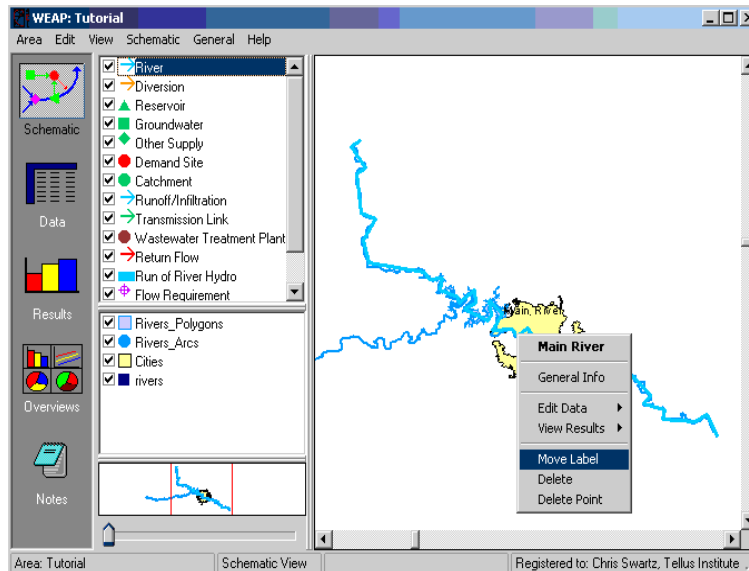


#### 4. Enter Data for the Main River


To enter and edit data for the Main River, either right-click on the Main River and select Edit data and any item in the list, or switch to the Data view by clicking on the Data symbol on the left of the main screen. Select: *Supply and Resources/ River /Main River* in the Data tree. You may have to click on the "plus sign" icon beside the Supply and Resources branch in order to view all of the additional branches below it in the tree.

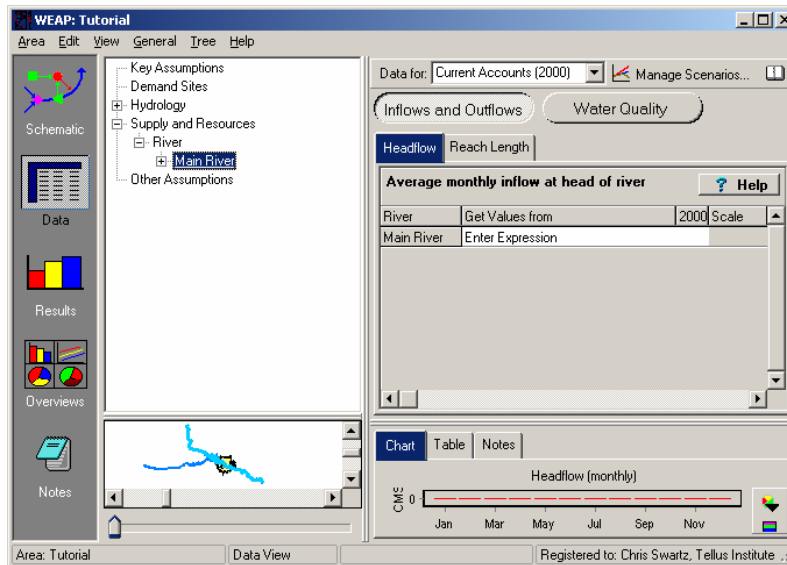

Alternatively, you can use the Tree pull-down menu and select “Expand All” to view all branches.

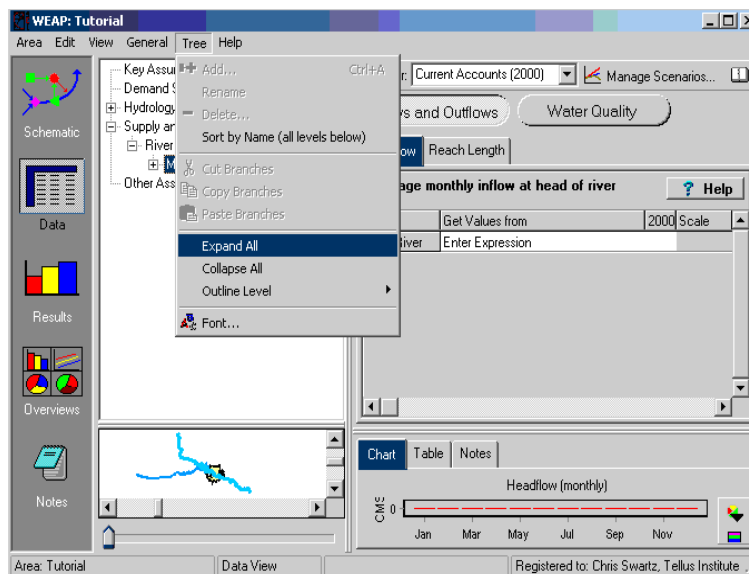


The "Inflows and Outflows" window should be open - if it isn't, click on the appropriate button. Click on the "Headflow" tab. Click on the area just beneath the bar labeled “2000” in the data input window to view a pull-down menu icon. Select the “Monthly Time-Series Wizard” from the drop-down menu.

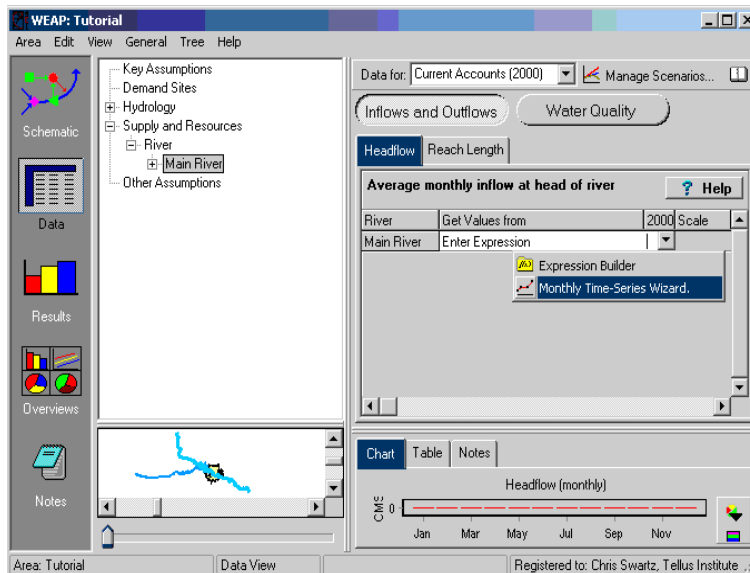

Use the *Monthly Time Series Wizard* to enter the following data series:

<i>Month</i>	<i>Flow (CMS)</i>
<i>Jan</i>	<i>12</i>
<i>Feb</i>	<i>7</i>
<i>Mar</i>	<i>11</i>
<i>Apr</i>	<i>17</i>
<i>May</i>	<i>80</i>
<i>Jun</i>	<i>136</i>
<i>Jul</i>	<i>45</i>
<i>Aug</i>	<i>32</i>
<i>Sep</i>	<i>38</i>
<i>Oct</i>	<i>18</i>
<i>Nov</i>	<i>9</i>
<i>Dec</i>	<i>7</i>

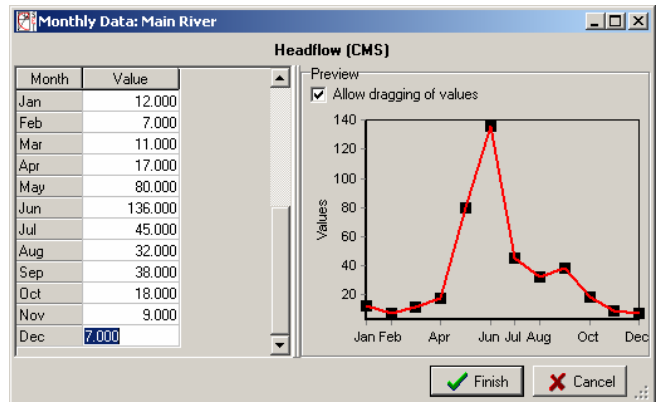

Note that as you enter each data point, the data is shown graphically also. Do not input or change any other data yet.




WEAP divides up rivers into reaches (segments). Originally your river has only one reach; as you add withdrawal and return points, WEAP will automatically create new reaches.

## 5. Create an Urban Demand Site and Enter the Related Data


Creating a demand node is similar to the process you used to create a river. Return to the Schematic view and pull a demand node symbol onto the schematic from the Element window, releasing the click when you have positioned the node on the left bank of the river (facing downstream) in the yellow area that marks the city's extent.

*Enter the name of this demand node as "Big City" in the dialog box, and set the demand priority to 1.*

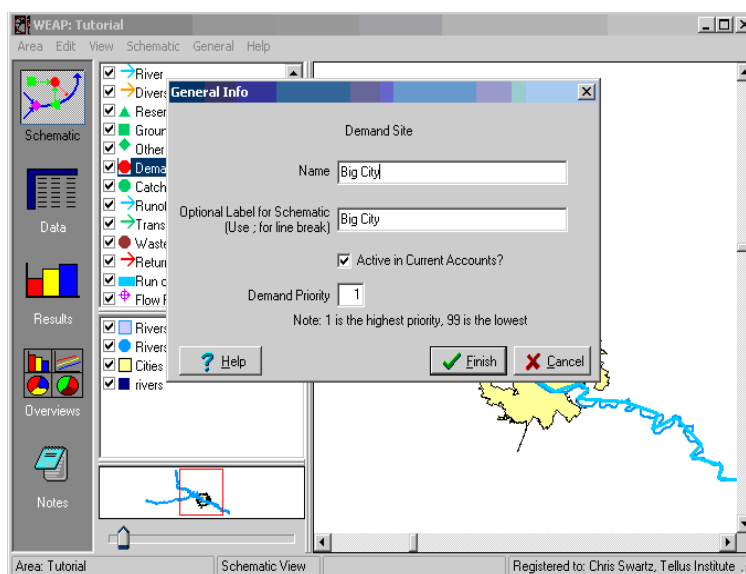


The Demand Priority represents the level of priority for allocation of constrained resources among multiple demand sites. WEAP will attempt to supply all demand sites with highest Demand Priority, then moving to lower priority sites until all of the demand is met or all of the resources are used, whichever happens first.

Right click on the Big City demand site and select "Edit data" and "Annual Activity Level". This is the alternative way to edit data, rather than clicking on the "Data" view icon on the side bar menu and searching through the data tree.

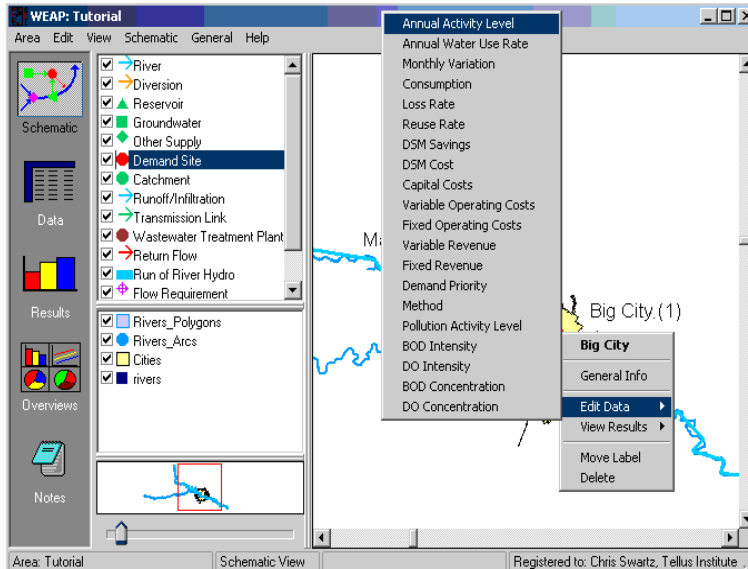

You must first select the units before entering data. Pull down the "Activity Unit" window, select "People", and click "OK".

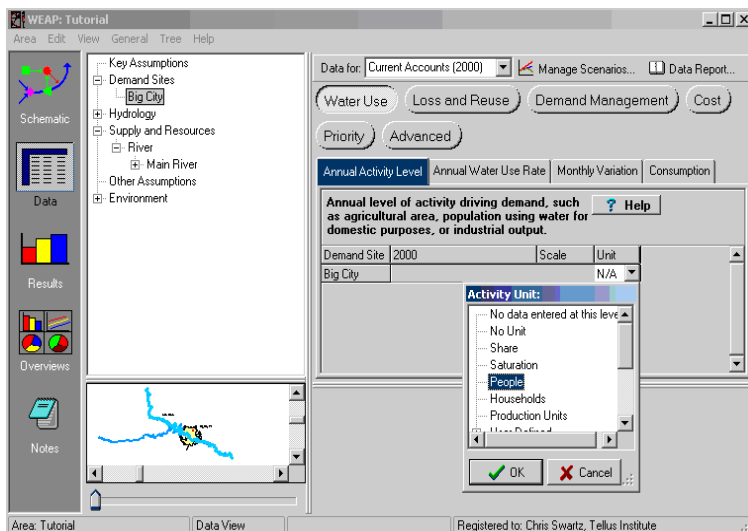

*In the space under the field labeled "2000", enter the Annual Activity Level as 800000.*

The screenshot shows the WEAP Tutorial interface. The left sidebar contains icons for Schematic, Data, Results, Overviews, and Notes. The main window is titled 'WEAP: Tutorial' and has a menu bar (Area, Edit, View, General, Tree, Help). The 'Data for:' dropdown is set to 'Current Accounts (2000)'. The 'Annual Activity Level' tab is selected, showing a table with the following data:

Demand Site	2000	Scale	Unit
Big City	800000		person

Below the table is a chart titled 'Annual Activity Level' with a y-axis labeled 'person' and a red bar representing the value for 'Big City'.


*Next, click on the "Annual Water Use Rate" tab and enter 300 under than year 2000.*

The screenshot shows the WEAP Tutorial interface with the 'Annual Water Use Rate' tab selected. The table below shows the updated data:

Demand Site	2000	Scale	Unit
Big City	300		m <sup>3</sup> /person

Below the table is a chart titled 'Annual Water Use Rate' with a y-axis labeled 'm<sup>3</sup>/person' and a red bar representing the value for 'Big City'.

Finally, click on the "Consumption" tab and enter 15. Note that the units are pre-set to "percent".

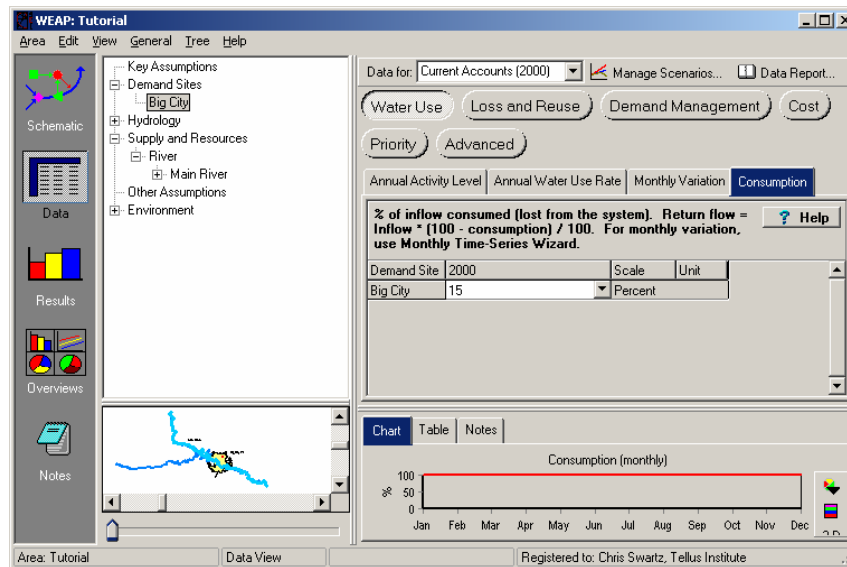


Consumption represents the amount of water that is actually consumed (i.e. is not returned in the form of wastewater).

## 6. Create an Agriculture Demand Site


Pull another demand node symbol into the project area and position it on the other side of the Main River opposite and downstream of Big City.

Name this demand node "Agriculture", and set the demand priority to 1.

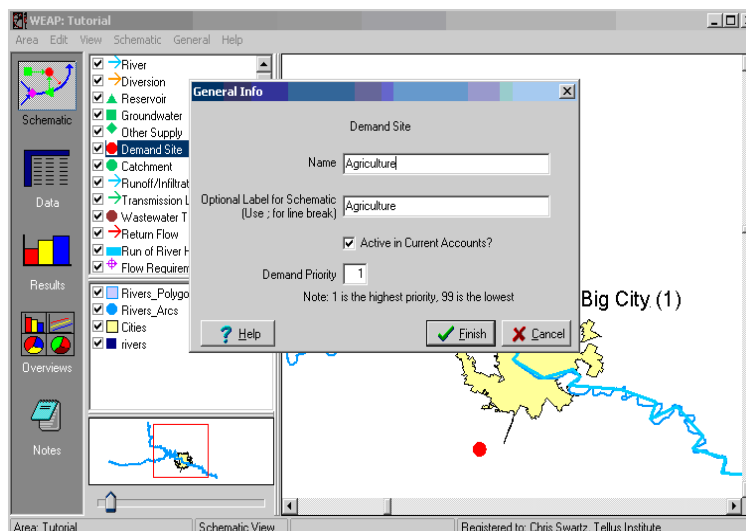

In the same manner as for Big City, enter the Annual Activity Level and Annual Water Use Rate in the Data View for the Agriculture demand site after first selecting "hectares" as the units (you may have to click on the "plus" sign to the left in the tree in order to see all of the area options).


*Annual Activity Level*      100,000 hectares  
*Annual Water Use rate*    3,500 m<sup>3</sup>/hectare

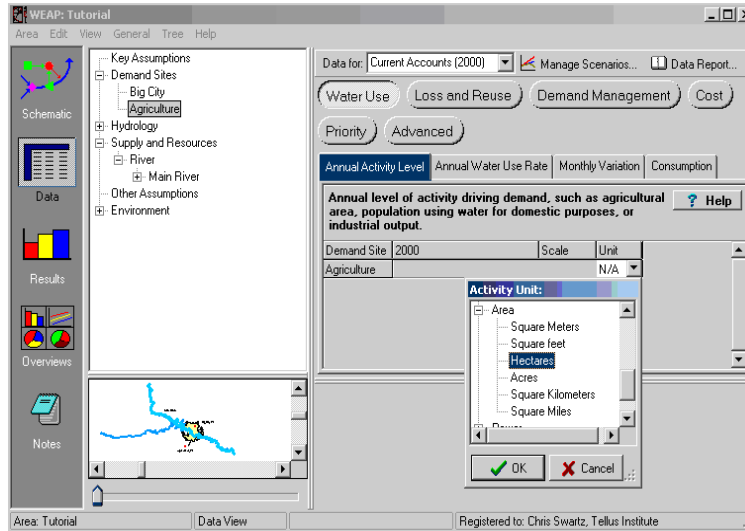

Select the Monthly Variation tab and the Monthly Time Series Wizard to enter the data below for the monthly variation in the water use rate.

*Monthly Variation:*

- 5% in April
- 10% in May and June
- 20% in July
- 30% in August
- 25% in September
- 0% for the rest of the year

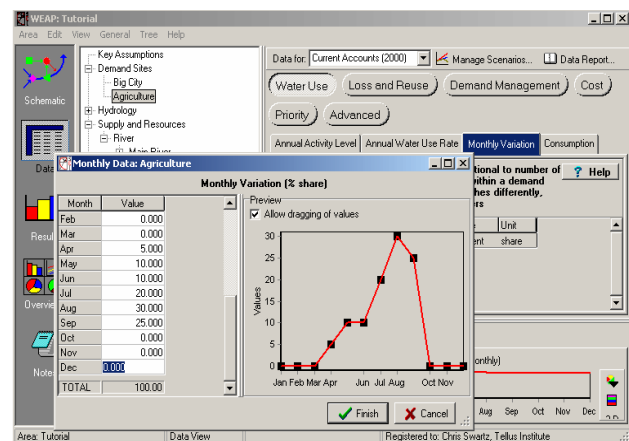

*Finally, click on the Consumption tab and enter 90.*






The monthly variation is expressed as a percentage of the yearly value. The values for all of the months have to sum up to 100% over the full year. If you don't specify monthly variation, WEAP will prescribe a monthly variation based on the number of days in each month.

You could have created one single demand site integrating both urban and agriculture demand. However, we will see later that this removes some of the flexibility in the water supply priorities allocation.

## 7. Connect the Demand with a Supply

You now need to tell WEAP how demand is satisfied; this is accomplished by connecting a supply resource to each demand site. Return to the Schematic view and create a Transmission Link from the Main River to Big City and to Agriculture. Do this by dragging the Transmission Link first to a position on the river, releasing the click, then pulling the link to Big City and double clicking on this demand node. Do the same for Agriculture, but start the Transmission Link downstream of the one created for Big City.

*Select a Supply Preference of 1 for each Transmission Link.*

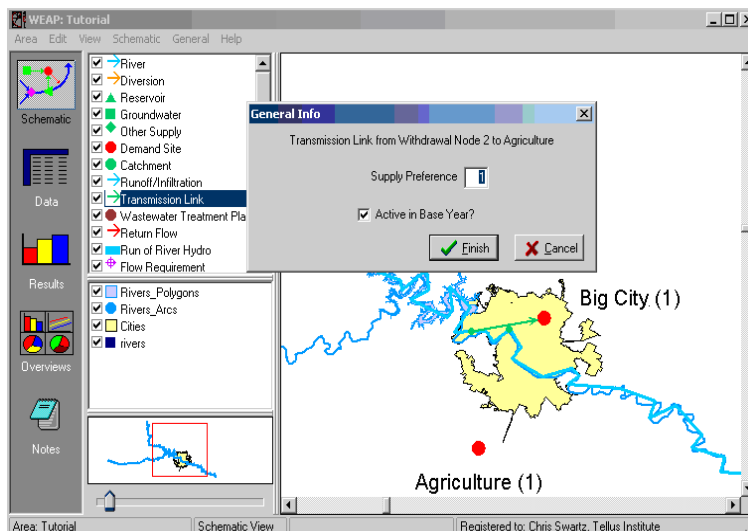


The Supply Preference parameter allows you to define which source should be used in priority to supply water to this Demand Site. WEAP will attempt to supply all of the demand with sources having highest preference level, only using lower-level sources if the high-level sources do not have sufficient supply.

## 8. Create Return Flow Links

Now create a Return Flow from Big City to the Main River. Do the same for Agriculture to the Main River. Follow the same "drag and release" procedure as for the Transmission Links.

*The return flow for the urban demand site should be positioned downstream of the agriculture withdrawal point. In the flow direction, the sequence should be: withdrawal for Big City, withdrawal for Agriculture, return from Big City, return from Agriculture.*

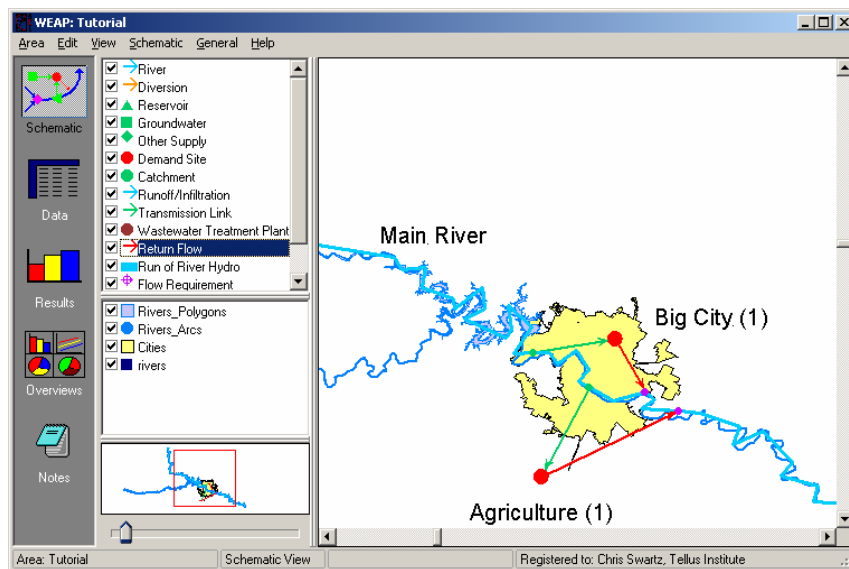


Next, set the Return Flow Routing for the Big City Return Flow. Do this by right-clicking on each Return Flow and selecting "edit data" and "Return Flow Routing" or by going to the Data view \ Supply and Resources \ Return Flows \ from Big City. Do the same for the Agriculture Return Flow.

*Set the Return Flow Routing to 100%.*




Return Flow Routing is the percent of total outflow from a demand site that is directed through a Return Flow Link. If only one Return Flow Link is created for a demand node, then the Return Flow Routing for that link must be 100%. Likewise, if multiple Return Flow links are created for a demand node, then Routing factors for all of the links must sum to 100%. Losses within the Return Flow Links are specified separately.

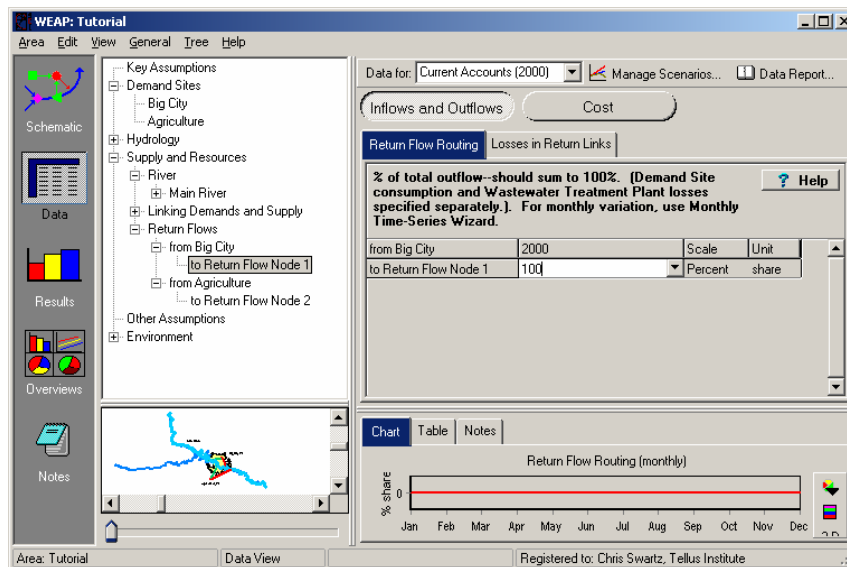

## 9. Check your Model


At this point, your model should look similar to the figure below.

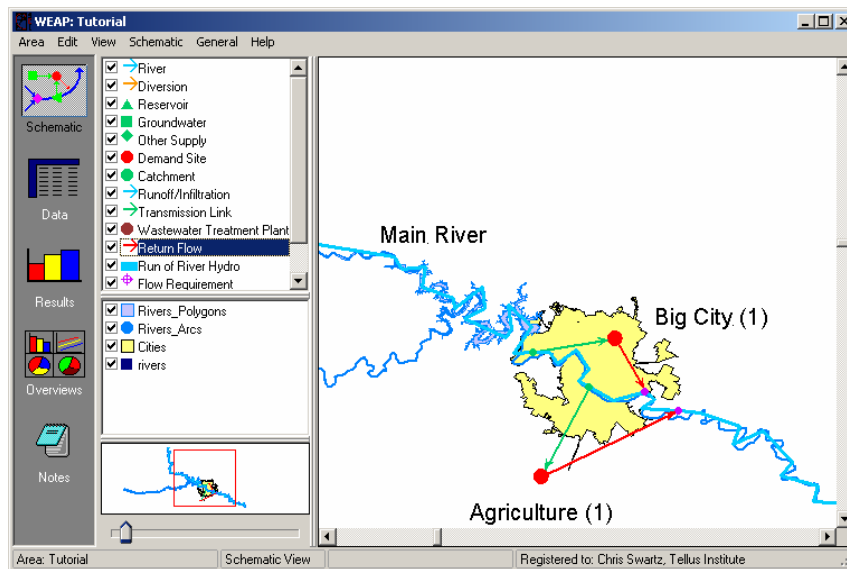

# Getting First Results


## 1. Run the Model

Click on the “Results” view to start the computation. When asked whether to recalculate, click yes. This will compute the entire model for the Reference Scenario - the default scenario that is generated using Current Accounts information for the period of time specified for the project (here, 2000 to 2005). When the computation is complete, the Results view will appear.

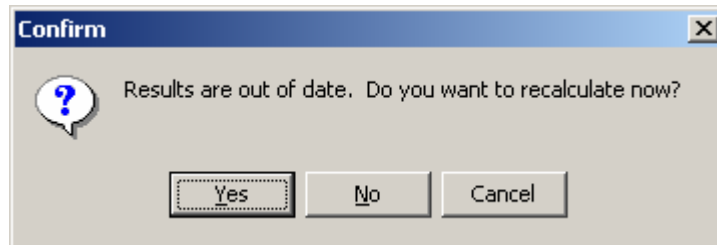


## 2. Check your Results

Click on the “Table” tab and select “Demand” and “Water Demand” from the primary variable pull-down menu in the upper center of the window (see below). Also, click the “Annual Total” Box.

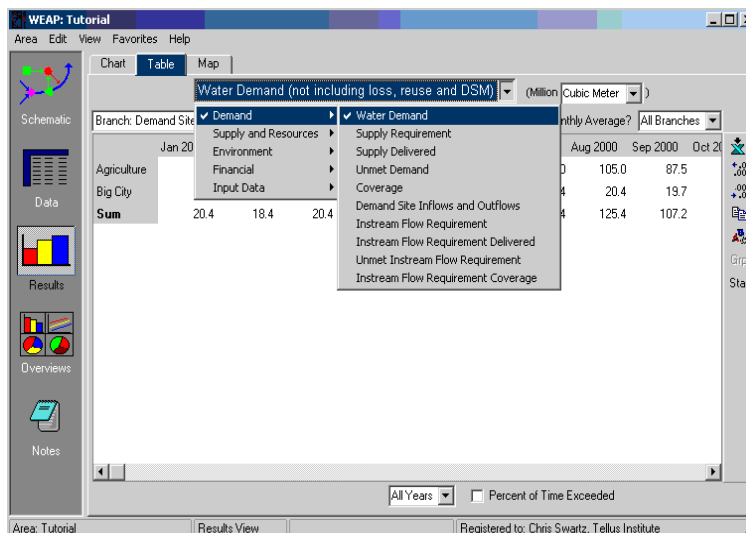

If you have entered all data as listed in previous steps, you should obtain the following annual demand values for each year (2000 to 2005) of the Reference scenario:

<i>Annual Demand for Agriculture</i>	<i>350 M m<sup>3</sup></i>
<i>Annual Demand for Urban Area</i>	<i>240 M m<sup>3</sup></i>

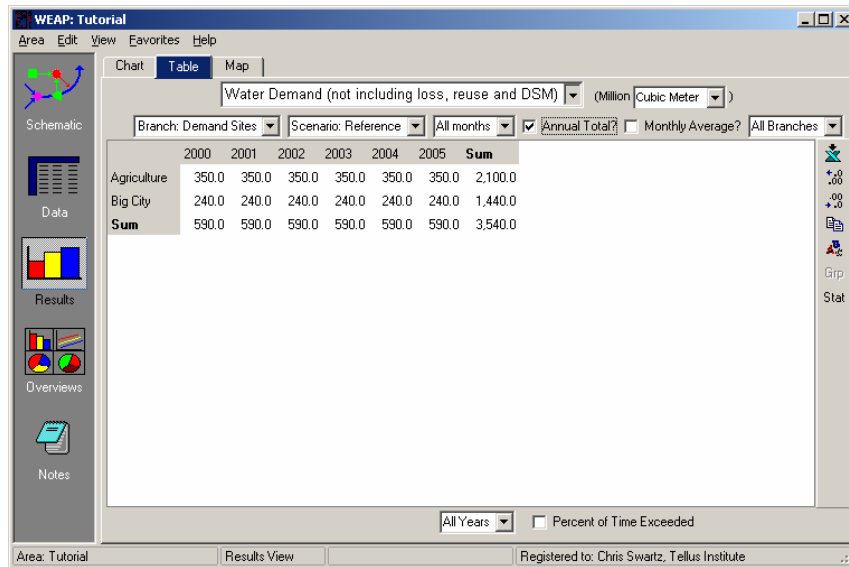


If you do not obtain those values go back to the “Data” view and check your inputs.

If you obtain an error or warning message read it carefully as it might reveal where in your inputs is the discrepancy, or which step you skipped.

### 3. Look at Additional Results

Now, look at the monthly Demand Coverage rates in graphical form. Click on the “Chart” tab. Select “Demand” and “Coverage” from the primary variable pull-down menu in the upper center of the window.

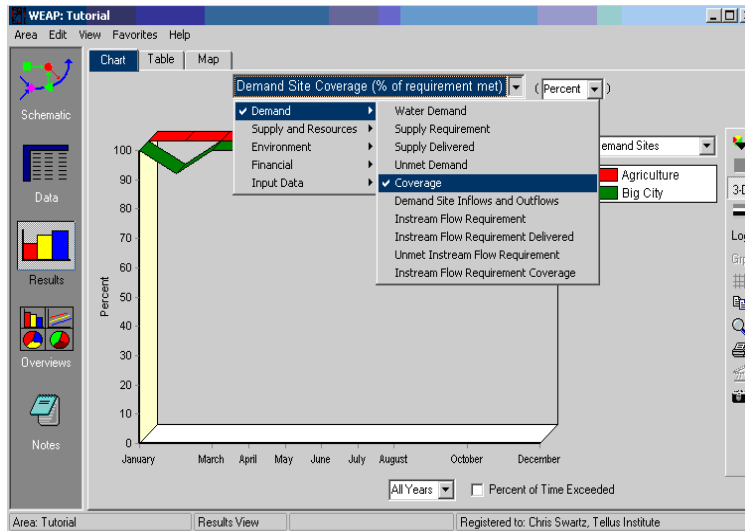

Format the graph by selecting the 3-D option on the left side-bar menu, and ensure that “All months” is selected in the pull-down menu above the graph (also keep the “Monthly Average” option checked). The graph should like the one below.



*During the months of December and February, which have little flow in the river, Big City lacks water, and therefore demands go unmet. Agriculture only has a shortfall in supply in the month of August and September, when the plants require most water.*



You can fully customize the way WEAP charts are displayed, as well as print or copy graphs to the clipboard using the toolbox located to the right of the graph.

---

# WEAP

Water Evaluation And Planning System

# Basic Tools

## *A TUTORIAL ON*

*Creating and Using Key Assumptions*.....40

*Using the Expression Builder*.....43

November 2005



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.sei.org/weap>


**Note:**

For this module you will need to have completed the previous module (“WEAP in one hour”) or have a basic knowledge of WEAP (creating an area, drawing a model, entering basic data, obtaining first results). To begin this module, go to the Main Menu, select “Revert to Version” and choose the version named “Starting Point for ‘Basic Tools’ module.”

## Creating and Using Key Assumptions

### 1. Using Key Assumptions



Key Assumptions are created by going to the Data view and right-clicking on the Key Assumptions branch of the Data Tree. Select “Add” - this will create a new Key Assumption variable below the Key Assumption branch.

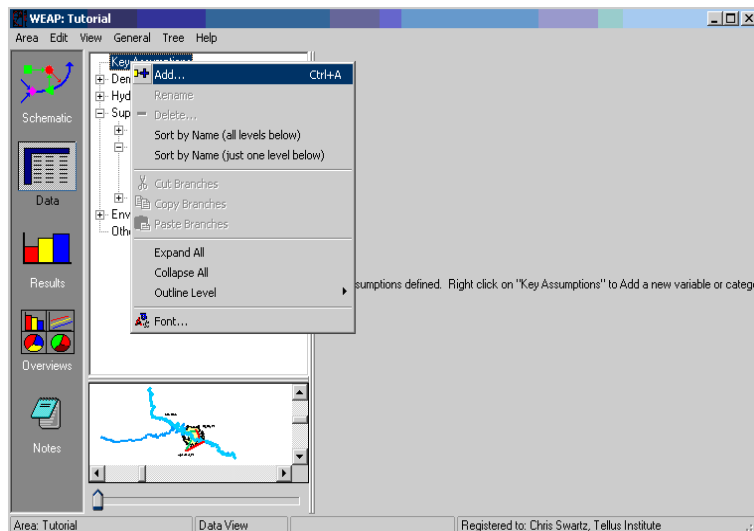

Create and name the following Key Assumptions (be sure to select the appropriate units from the Units pull-down menu):

<i>Unit Domestic Water Use</i>	$300 \text{ m}^3$
<i>Unit Irrigation Water Needs</i>	$3,500 \text{ m}^3$



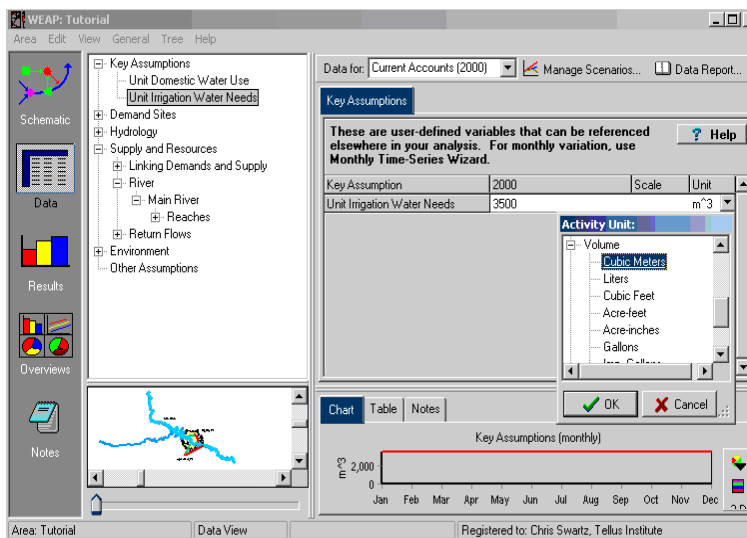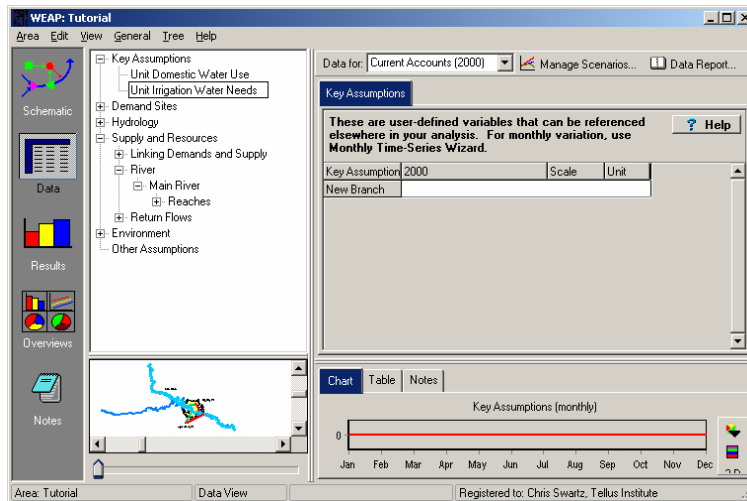


With Key Assumptions, it is important to ensure that the units designated in a Key Assumption variable match the units indicated for the variable as it occurs elsewhere in the data tree.

Create one more Key Assumption, Domestic Variation, that is unitless, and use the Monthly Time Series to populate it with values:

*Domestic Variation*

- Jan to Feb & Nov. to Dec.: 0.9
- Mar. to May & Sept. to Oct. 1.0
- June 1.1
- Jul, Aug 1.15

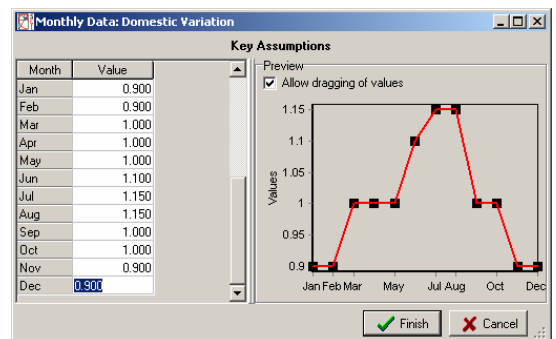





The use of key assumptions is especially worthwhile when the model has a large number of similar objects, for example demand sites, and when performing scenario analyses. In this case, you can easily set all your demand sites to have the same unit domestic consumption. Then, you can create scenarios to vary this consumption without having to edit each and every demand site – simply by changing the key assumption value.

## 2. Creating References to Key Assumption

Create a Key Assumption reference for “Big City Annual Water Use”. Do this by going to the “Annual Water Use” window for Big City in the Data view. Click on the Expression Builder pull-down menu in the space where you entered the “Annual Water Use Rate” (300 m<sup>3</sup>) previously.

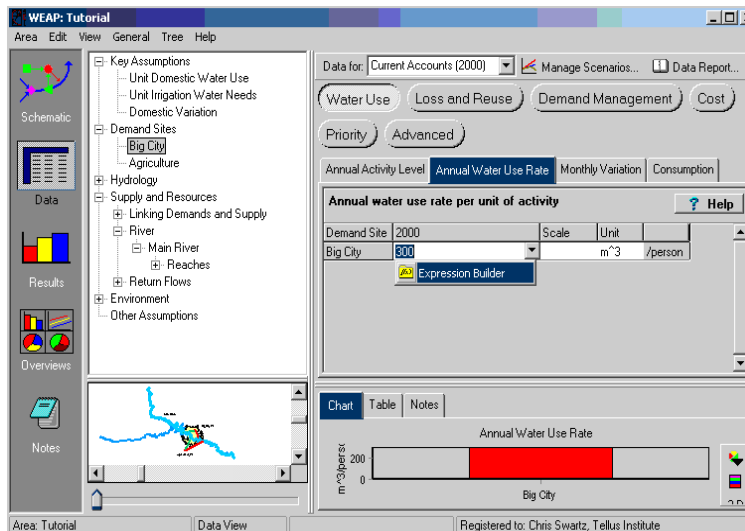

In the Expression Builder window, delete the value of 300 from the text field at the bottom of the Expression Builder window, click on the “Branches” tab, then click on the “Unit Domestic Water Rate” Key Assumption (you may have to expand the data tree to see all of the branches) in the Data tree field and drag it down to the text field. Click on “Finish”.

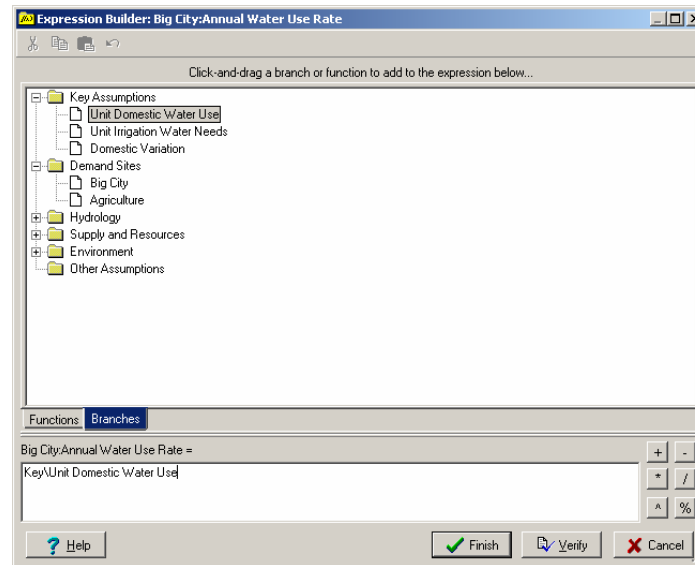

Repeat this procedure to replace the 3500 m<sup>3</sup>/ha water use rate for the “Agriculture” Demand Site with the newly created “Unit Irrigation Water Needs” Key Assumption.

*If you check the results now by re-recalculating, you should have the same annual total values for demand as obtained in the WEAP in One Hour module:*

- Annual Demand for Agriculture            350 M m<sup>3</sup>
- Annual Demand for Urban Area            240 M m<sup>3</sup>




Using the same process, references to other objects’ data can also be created. This can be helpful in certain cases. Upon dragging and dropping the object to be referenced from the tree to the expression builder’s text field, a list of all available variables appears.

---

## Using the Expression Builder


### 3. Creating Mathematical Expressions

You will now alter the monthly variation in water demand for Big City using a mathematical expression. Click on the “Monthly Variation” tab (in the “Water Use” window) and select the Expression Builder from the pull-down menu in the data entry bar.

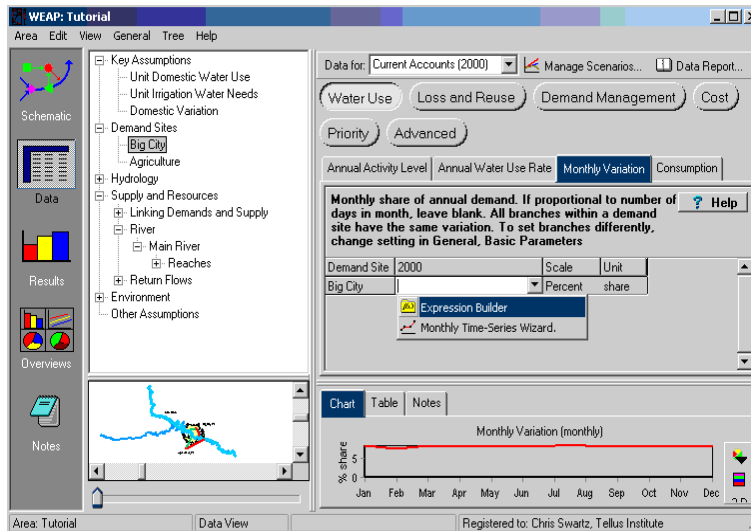


Create the following expression by pulling down the “Domestic Variation” Key Assumption and typing in the modifying terms:

$$\text{Domestic Variation} * 100 / 12$$

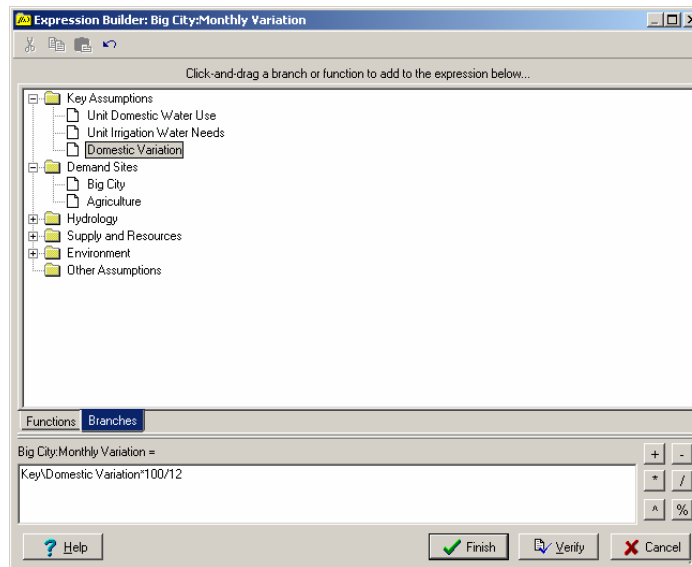


Note that if you had made a mistake in typing the expression, such as entering a space instead of a division sign, an error message would have appeared after clicking “Finish”. You would then be given the opportunity to review and correct the expression. After the correction of an error, you must click “Verify” before “Finish”.

View the new results for “Demand Site Coverage” after making these changes. Click on the Results view and click on “Yes” to recalculate. The results should appear as below:


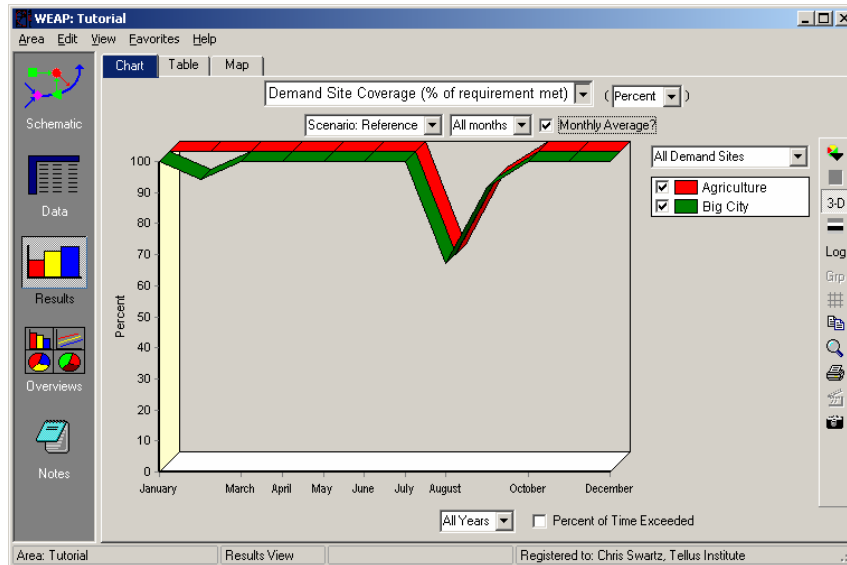


Note that there now is no unmet demand in December for Big City because the fraction of demand in December decreased from 8.5% (originally based on the number of days in the month) to 7.5% (now based on the expression using the “Domestic Variation” Key Assumption). You can review the numerical values calculated from the “Monthly Variation” expression by selecting the “Table” tab in the data review panel at the bottom of the data window.

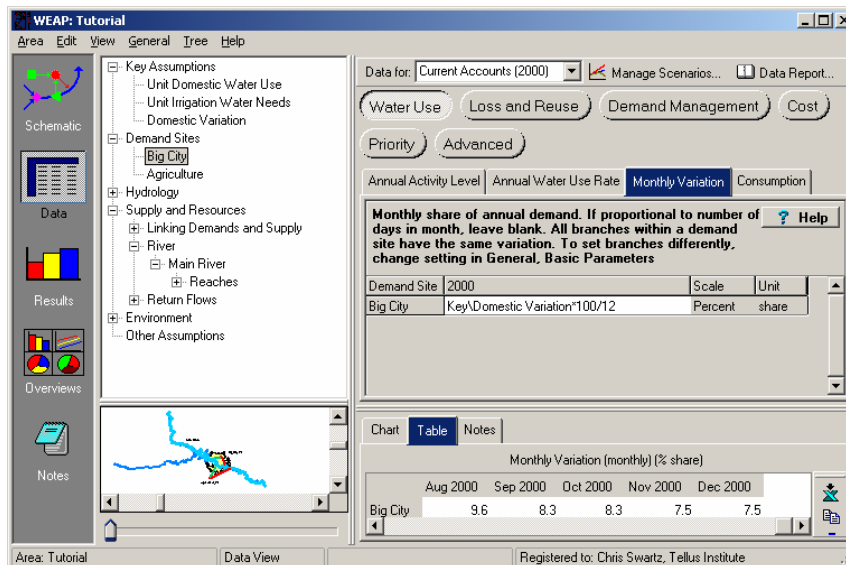

## 4. Using Built-In Functions

We will assume that the current population of Big City (2000) is not known, but we know its population during the last census and the growth estimate. Use the built-in “GrowthFrom” function to compute the current population of Big City. Do this by selecting the Expression Builder from the pull-down menu in the year 2000 data input field within the “Annual Activity Level” window for Big City. Delete the present value of 800000, click on the “Function” tab rather than the “Branch” tab and drag down into the text field the “GrowthFrom” expression selected from the list of built in expressions.

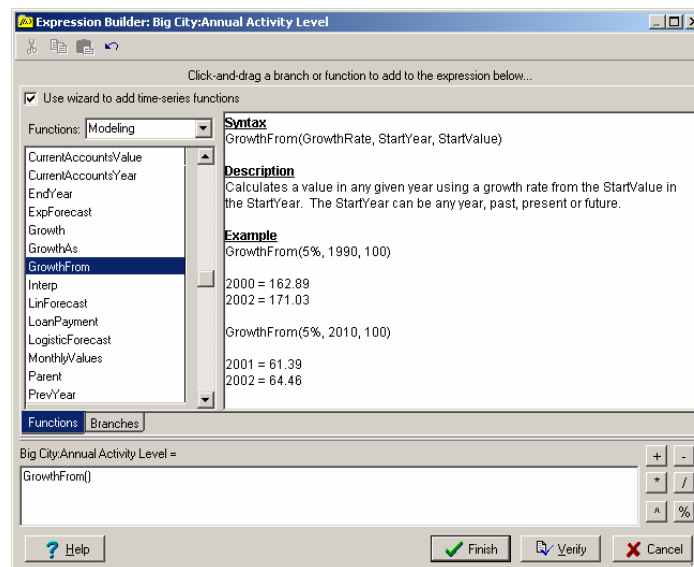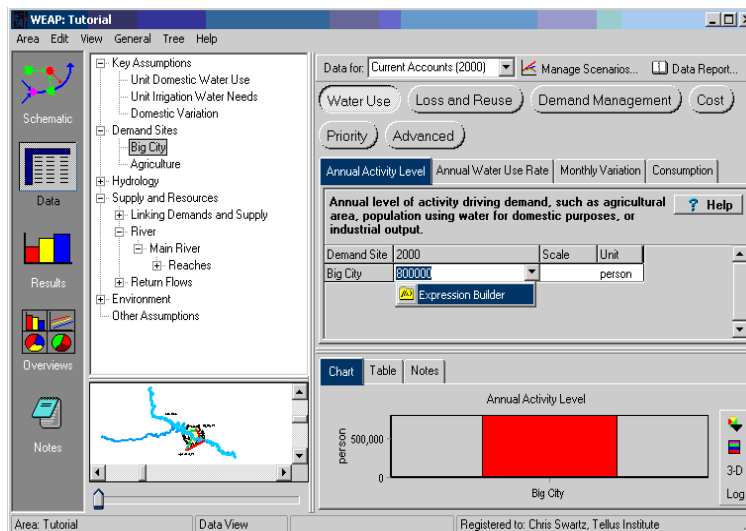


Input the following data into the “GrowthFrom” expression, using the format indicated in the description window next to the expression list.

*Date of last Census*            1990  
*Population at last census*   733,530  
*Estimated growth rate*      1.75%

This results in the following format for the expression:

*GrowthFrom(1.75%, 1990, 733530)*

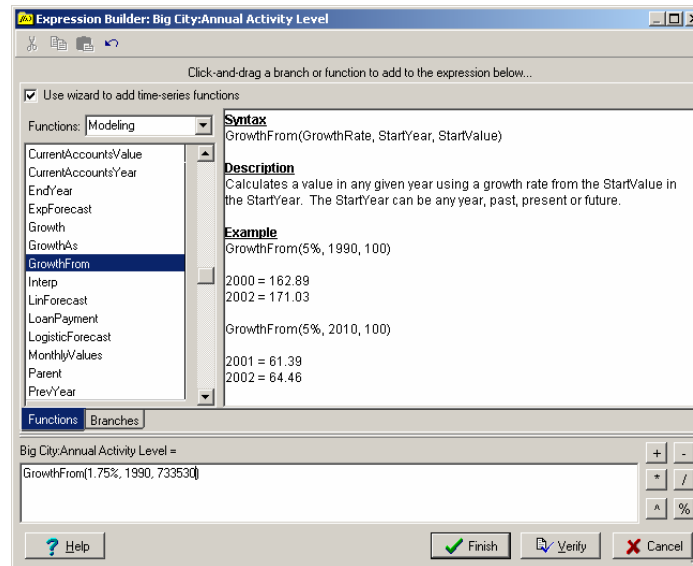

The Expression Builder is only a simple way of entering expressions and functions. Savvy users can by-pass it and enter functions, references and mathematical expressions directly in the main Expression window.

---





---

# WEAP

Water Evaluation And Planning System

# Scenarios

## ***A TUTORIAL ON***

*Preparing the Ground for Scenarios* .....50

*Creating the Reference Scenario* .....51

*Creating and Running Scenarios* .....56

*Using the Water Year Method*.....59

**November 2005**



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.sei.org/weap>

**Note:**

For this module you will need to have completed the previous modules (WEAP in One Hour and Basic Tools) or have a fair knowledge of WEAP (data structure, Key Assumptions, Expression Builder). To begin this module, go to the Main Menu, select "Revert to Version" and choose the version named "Starting Point for 'Scenarios' module".

## Preparing the Ground for Scenarios

### 1. Understand the Structure of Scenarios in WEAP

In WEAP the typical scenario modeling effort consists of three steps. First, a "Current Accounts" year is chosen to serve as the base year of the model; Current Accounts has been what you have been adding data to in the previous modules. A "Reference" scenario is established from the Current Accounts to simulate likely evolution of the system without intervention. Finally, "what-if" scenarios can be created to alter the "Reference Scenario" and evaluate the effects of changes in policies and/or technologies.

*Read the "Scenarios" help topic (under the Data subheading in the Help Contents) for a more detailed description of the WEAP approach.*

### 2. Change the Time Horizon for the Area

Under the General \ Years and Time Steps menu, change the "Time Horizon" of the Area.

<i>Current Accounts Year</i>	<i>2000 (unchanged)</i>
<i>Last Year of Scenarios</i>	<i>2015</i>

### 3. Create an Additional Key Assumption

Create the following key assumption:

*Population Growth Rate 2.2%*


There is no unit for this Key Assumption, but remember to change the “Scale” field to Percent.

## Creating the Reference Scenario

### 1. Describe the Reference Scenario


The “Reference” Scenario always exists. Change its description in the Area \ Manage Scenarios menu to reflect its actual role. Note that you must be in the Data View or Schematic view to have access to the “Manage Scenarios” option in the Area menu.

*For example, “Base Case Scenario with population growth continuing at the 1960-1995 rate and slight irrigation technology improvement”.*

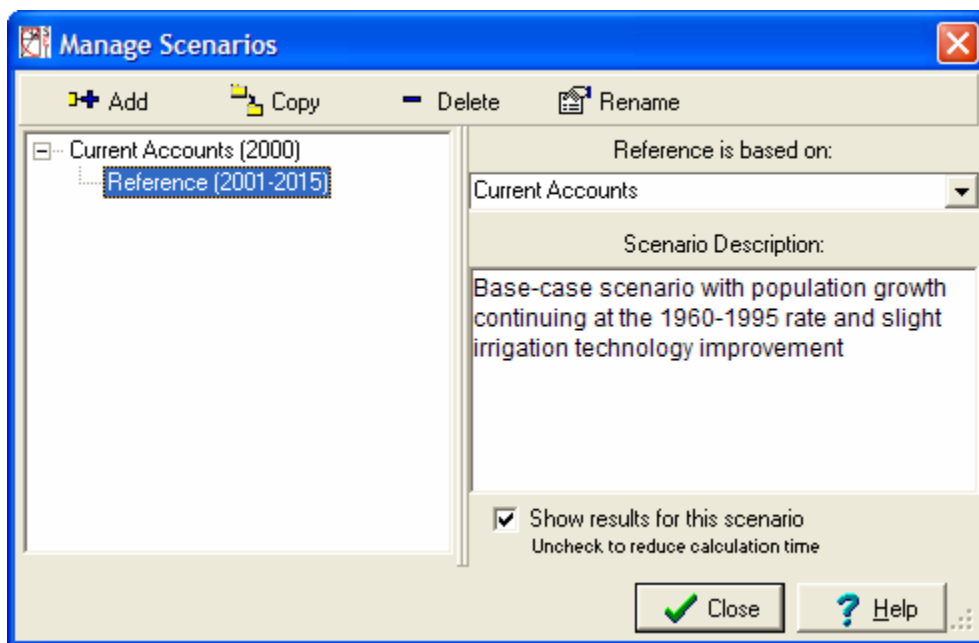


### 2. Change the Unit Irrigation Water Use

In the Data View, change the “Unit Irrigation Water Needs” Key Assumption to reflect a new annual pattern for the period (2001-2015) after the Current Accounts year. To make the change, you will need to select the “Reference” scenario from the drop-down menu at the top of the screen. Use the “Yearly Time-Series Wizard” to construct the time series.

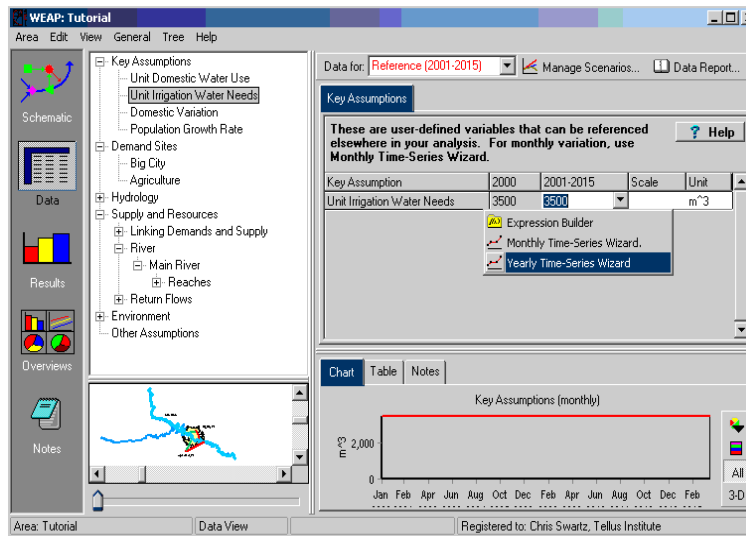

First, select the function "Interpolate" by clicking on it, then click "Next".

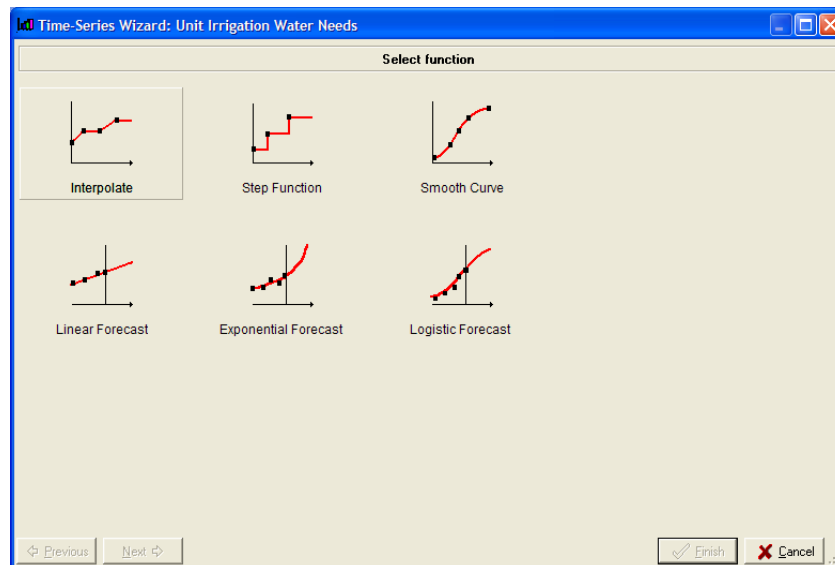

Click on "Enter Data" in the next window, click "Next", then click "Add" to add the following data to the time series:

*Type of Time Series:*            *Interpolate*

*Data:*

2000 3500


2005 3300

2010 3200

2015 3150

*Growth after last year:*            *0%*

Note that the first data point, for the year 2000, should already be listed in the data input window because it was input when the "Unit Irrigation Water Needs" Key Assumption was created in the Current Accounts (see Exercise 1 under Creating and Using Key Assumptions, Basic Tools Module).

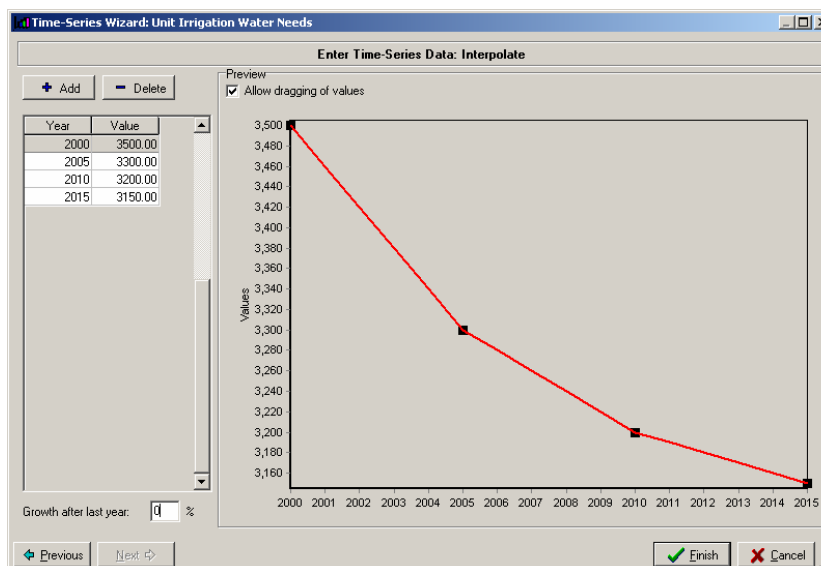

As you can see while running the Yearly Time Series Wizard, WEAP offers a wide range of techniques to build time series, including importing from Excel files, creating step functions, using forecasting equations etc.




The Yearly Time Series Wizard helps you create expressions. You can also simply type or edit the expression (in this case, "Interp( 2000,3500, 2005,3300, 2010,3200, 2015,3150 )" without running the wizard, either directly or through the Expression Builder.

### 3. Set the Population Growth

Set the population of Big City to grow by the rate defined by the “Population Growth Rate” Key Assumption defined in an earlier step. Here again you will have to select the “Reference” scenario in the drop-down menu at the top of the Data view.

*Make sure you have the Big City Demand Site and its Annual Activity Level tab selected. Delete the current expression and select the “Growth” function in the Expression Builder in the pull-down menu below the 2001-2015 field (Note that the present expression in this field is the same as that for the Current Accounts year). Then click on the “Branch” tab above the text field. Either double click on the “Population Growth Rate” Key Assumption in the Data Tree, or drag it down into the expression window. Your final function should read “Growth(Key\Population Growth Rate/100)”*

*Note that you have to divide the “Population Growth Rate” by 100 in order for WEAP to recognize the value of 2.2 in the Key Assumption as 0.022 in the calculation.*

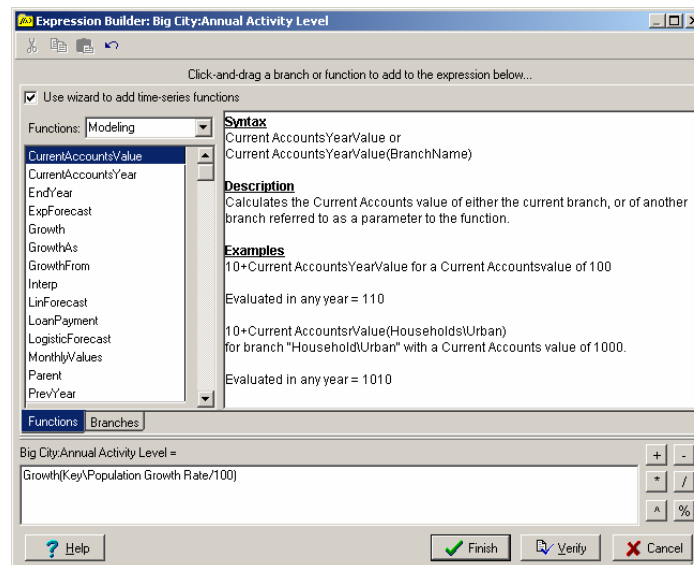

The same effect could have been modeled without creating a Key Assumption in the first place. We will see however that doing so provides more flexibility when adding other scenarios.





Any value for which no time series is defined for the “Reference” scenario is assumed to remain constant. In our case for example, the Agriculture demand will remain constant until 2015 unless we change this variable as well.

## 4. Run the Reference Scenario

Run the Reference Scenario by clicking the “Results” view. Look at a 3-D graph of “Unmet Demand” (select “Annual Total”) for both demand sites. It should be similar to the figure below. Think about the following points.

*How does the demand evolve compared to the unmet demand?*

*Why is the total unmet demand decreasing at first and then increasing?*

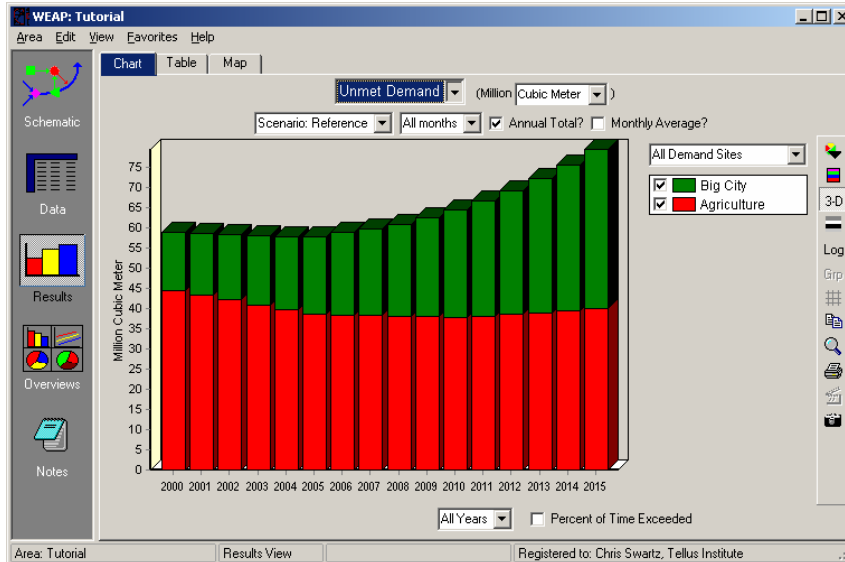
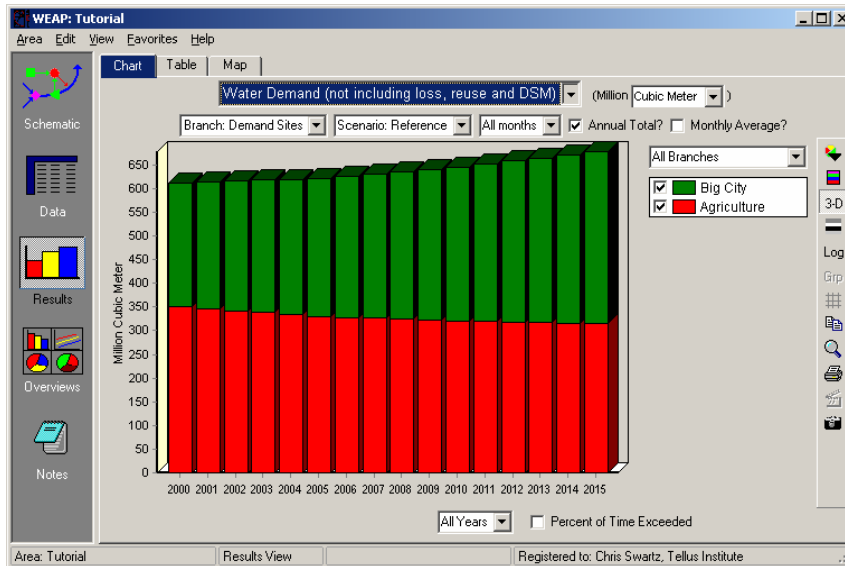


# Creating and Running Scenarios

## 1. Create a New Scenario to Model High Population Growth

Create a new scenario to evaluate the impact of a population growth rate for Big City higher than 2.2% for the period 2001-2015.

*For this, choose the menu "Area", "Manage Scenario", right-click the "Reference" scenario and select "Add". Name this scenario "High Population Growth" and add the description "This scenario looks at the impact of increasing the population growth rate for Big City from a value of 2.2% to 5.0%."*

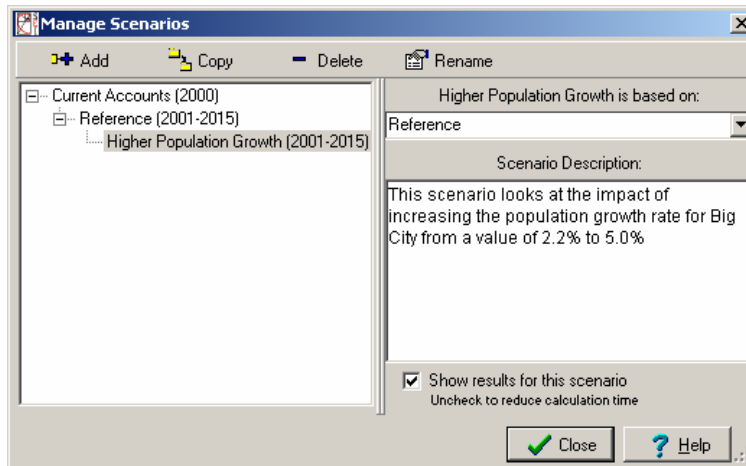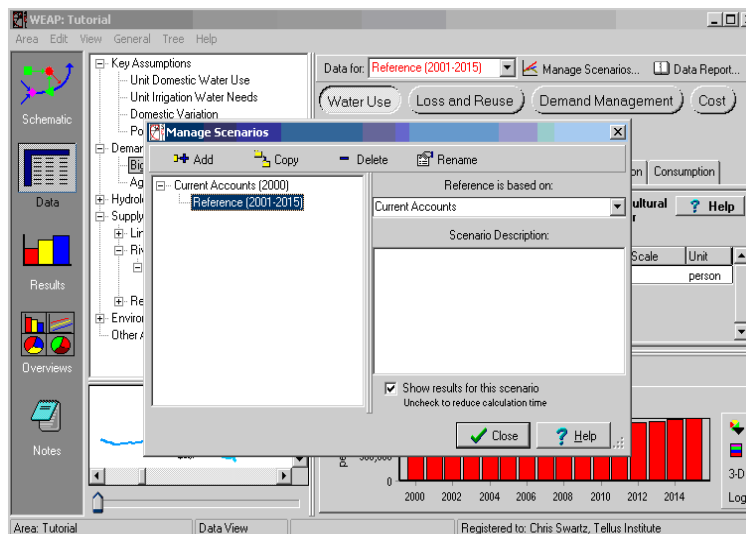



## 2. Enter the Data for this Scenario

Make the following changes in the Data view after having chosen your new scenario in the drop-down menu at the top of the screen:

*Select the “Population Growth Rate” Key Assumption and change the value under the 2001-2015 field to 5.0. Note that the color of the data field changes to red after the change - this occurs for any values that are changed to deviate from the “Reference” scenario value.*


The screenshot shows the WEAP: Tutorial software interface. The 'Key Assumptions' table is visible, with the 'Population Growth Rate' row highlighted. The value for the 2001-2015 period is 5.0, which is highlighted in red. The chart below shows the 'Key Assumptions (monthly)' data, with a red line indicating the change in the population growth rate over time.

Key Assumption	2000	2001-2015	Scale	Unit
Population Growth Rate	2.2	5.0	Percent	

## 3. Compare Results for the Reference and Higher Population Growth Scenarios


Compare, graphically, the results for the two scenarios we have established so far (Reference and Higher Population Growth).

*For example, select “Water Demand” from the primary variable pull-down menu. Click in the drop-down menu to the right of the chart area (above the graph legend), and select “All Scenarios”. Choose to show only Big City demand by selecting it from the pull-down list in the upper left pull-down menu of the Results window. Your graph should be similar to the one below.*

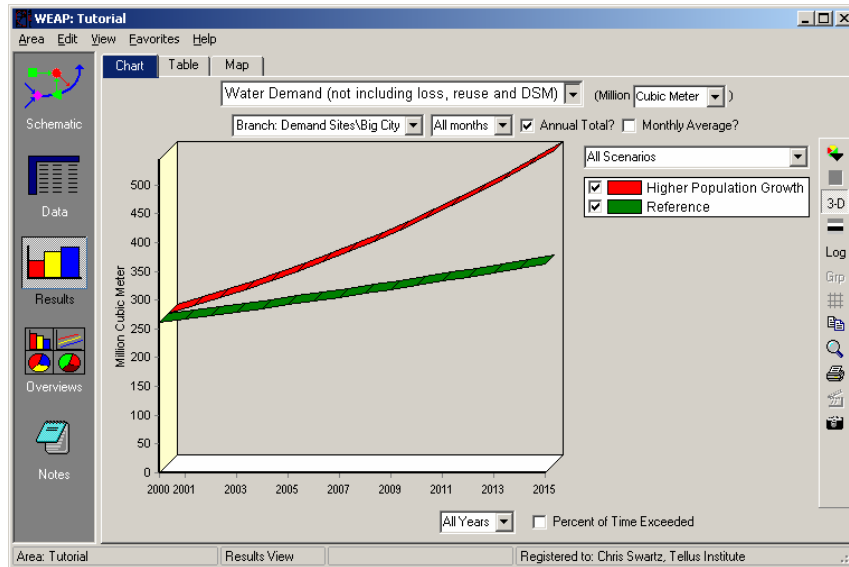

Note the higher Water Demand for Big City in the “Higher Population Growth” scenario, as expected.

Next, compare “Unmet Demand” for the two scenarios. Use the primary variable pull-down menu to select “Unmet Demand”.

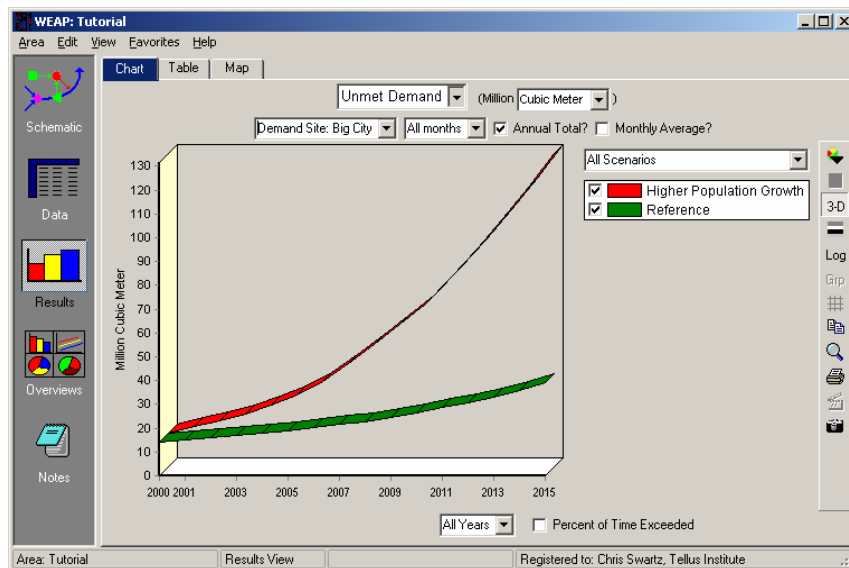

Again, note the higher Unmet Demand for the Higher Population Growth scenario.




When creating many scenarios in the same area, the computation can become lengthy. In this case you can exclude some of the scenarios from the calculation by unchecking the “Show results for this scenario” box in the scenario manager for those scenarios.

# Using the Water Year Method

## 1. Create the Water Year Definitions


The previous exercise *only varied demand, not supply*. In this step we now want to see how natural variation in climate data (stream flow, rainfall etc.) can be taken into account in WEAP through scenario analyses. We will use the "Water Year Method" as an example. The Water Year Method is a simple means to represent variation in climate data such as streamflow, rainfall, and groundwater recharge. The method first involves defining how different climate regimes (e.g., very dry, dry, very wet) compare relative to a normal year, which is given a value of 1. Dry years have a value less than 1, very wet years have a value larger than 1.

With the "Reference" scenario selected, go into the data view and click on the "Water Year Method" branch under "Hydrology" in the Data tree.

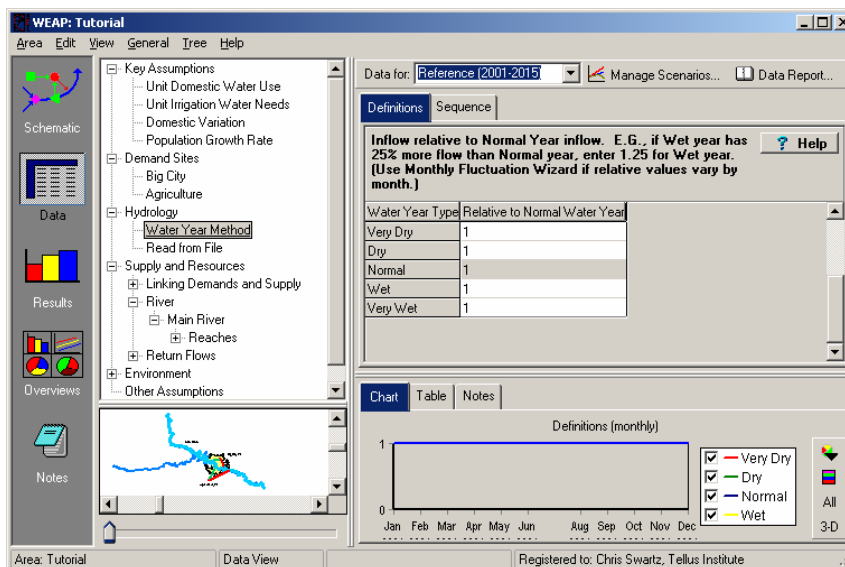

Select the "Definitions" tab and enter the following data:

<i>Very Dry</i>	0.7
<i>Dry</i>	0.8
<i>Normal</i>	1.0
<i>Wet</i>	1.3
<i>Very wet</i>	1.45

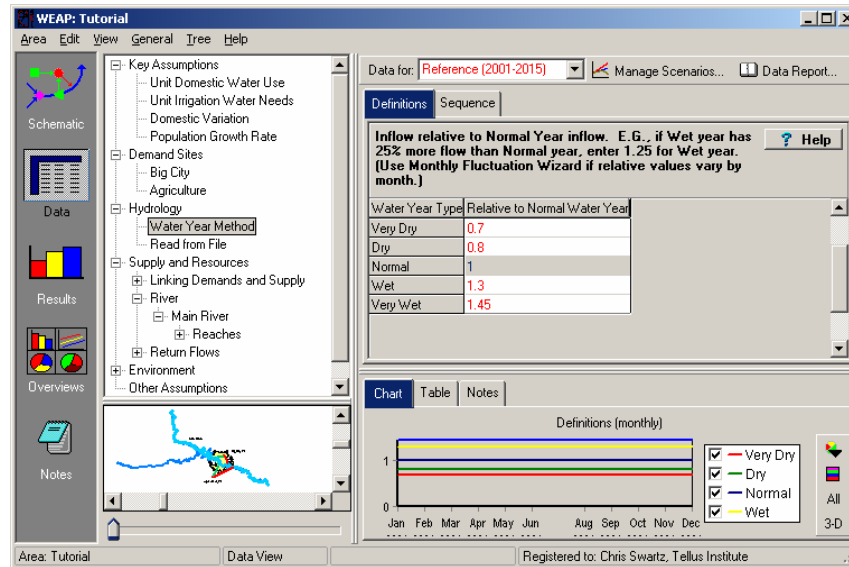

Monthly variations can be entered if data is available.


## 2. Create the Water Year Sequence

The next step in using the "Water Year Method" is to create the sequence of climatic variation for the scenario period. Each year of the period is assigned one of the climate categories (e.g., wet). For the "Reference" scenario, we will assume the following sequence:


2001-2003 *normal*  
 2004 *very dry*  
 2005 *wet*  
 2006-2008 *normal*  
 2009-2010 *dry*  
 2011 *very wet*  
 2012 *normal*  
 2013 *wet*  
 2014 *normal*  
 2015 *dry*

To input this sequence, select the "Sequence" tab under the "Water Year Method" branch.

*Set the Current Account as Normal*

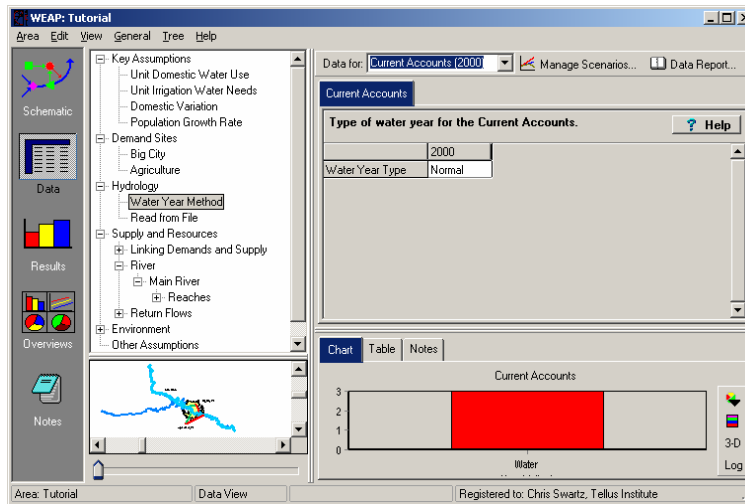

Then, select the “Reference” scenario and input the sequence given above.

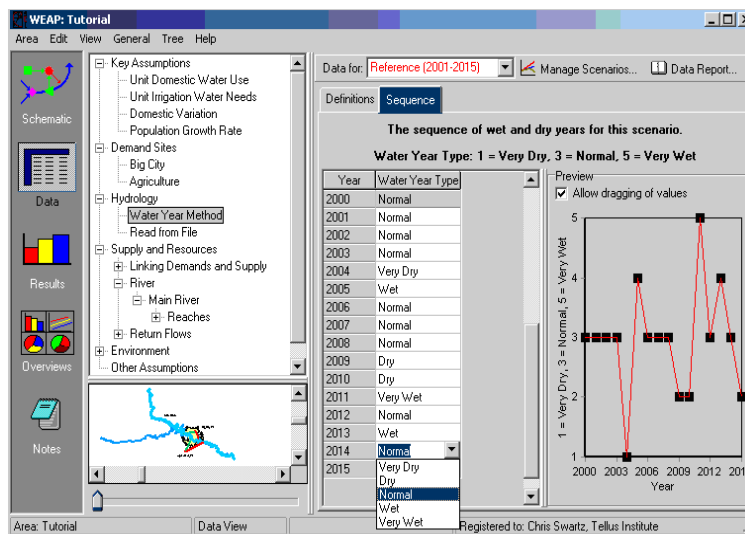


In order to let the inflows to the model (in our case, the headflow of the main river) vary in time, WEAP offers two strategies. If detailed forecasts are available, those can be read using the ReadFromFile function (refer to the Tutorial module on Format and Data for more details). Another method, which is the one presented here, is the “Water Year Method”. Under this method every year in the model’s duration can be defined as normal, wet, very wet, dry or very dry. Different scenarios can then alter the chosen sequence of dry and wet years to assess the impact of natural variation on water resources management.

### 3. Set up the Model to Use the Water Year Method


In the Data tree, change the “Headflow” for the Main River in the “Reference” scenario to use the “Water Year Method”. Note that before, the monthly values of Headflow were the same for the period 2001-2015 as for 2000, the Current Accounts year.

*Use the drop down menu in the “Get Values from” to select this method. You may have to scroll left in this window to get the “Get Values from” field to appear*

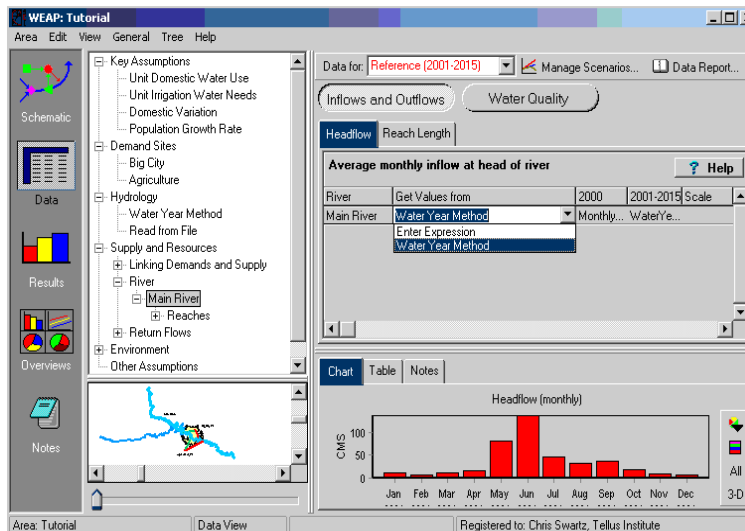

### 4. Re-run the Model

Run the model again and compare “Unmet Demand” for the “Reference” and “Higher Population Growth” scenarios, as before (of course, “Water Demand” will not have changed after altering the supply side of the model with the Water Year Method).

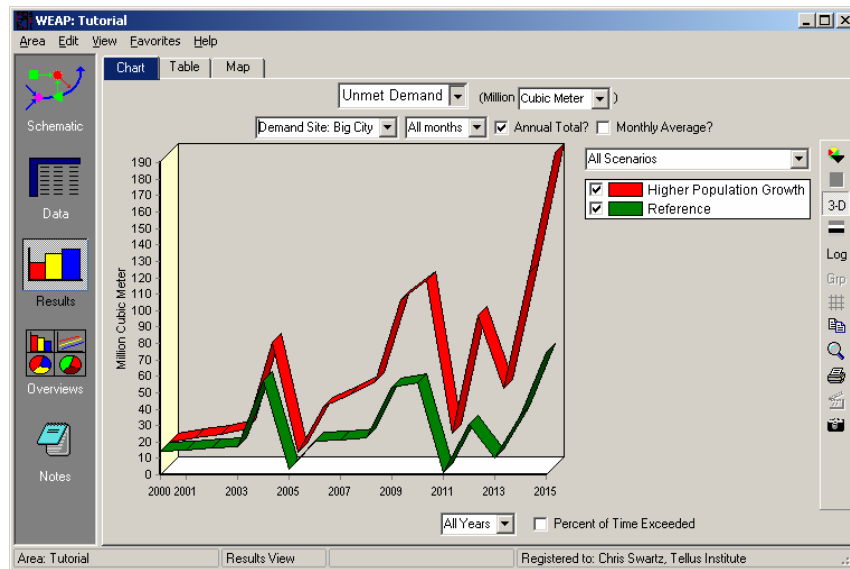

Note that Big City “Unmet Demand” for both scenarios is much more erratic using the Water Year Method than assuming a constant headflow to the Main River, as observed in the previous exercise. In the present case, Unmet Demand varies as the future climate varies. During years wetter or much wetter than normal (2000, the Current Accounts year), Unmet Demand is actually lower than in 2000 for both scenarios, even with the increase in Water Demand from population growth (2.2% for the Reference and 5.0% for the Higher Population Growth scenarios). The increased precipitation, and headflow to the river, mitigates this increased demand in the wetter years.

The opposite occurs in the dry to very dry years, where the population growth is exacerbated by the lower precipitation and headflow in the river in these years. This leads to even higher Unmet Demand than is simulated assuming a constant climate (as performed in the previous exercise).

---


Since unmet demand is the difference between a large demand and a large supply, even a rather small change in the supply at nearly-constant demand can have a very large impact on the unmet demand.



This model does not take any kind of inter-year storage into consideration (reservoirs, groundwater). Therefore, there is no way that the shortage in a dry year can be alleviated by using surplus from previous, wetter years. For more details on how to model storage, refer to the “Refining the Supply” WEAP tutorial module.

---


If you had wanted to compare, *in the same graph in WEAP*, results for the Water Year Method to that generated assuming a constant climate, you could have created a new scenario that used the Water Year Method rather than changing the data in the “Reference” scenario to accommodate the Water Year Method. This new scenario would be inherited from the “Reference” scenario, and the Scenario tree in the “Scenarios Manager would look as follows:

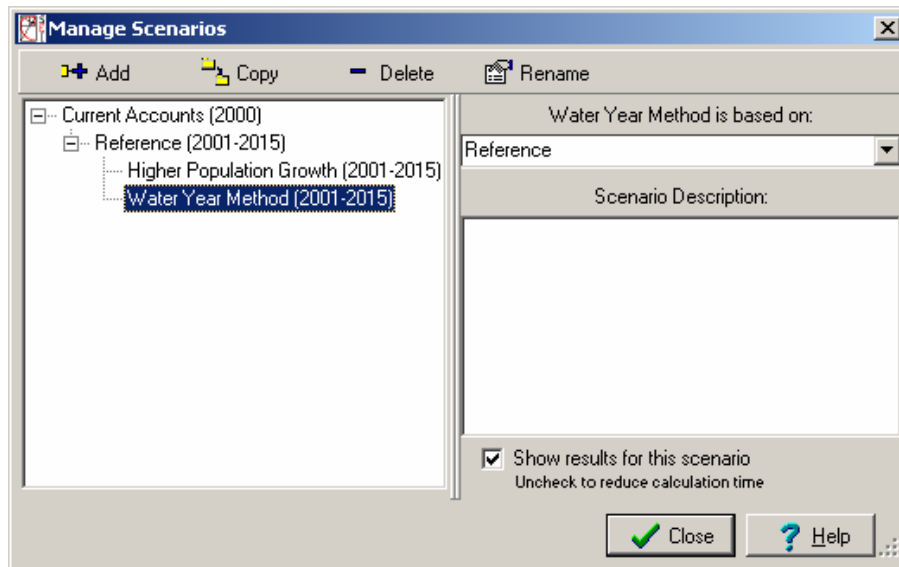

Note that in this case, both the “Reference” (constant climate) and “Water Year Method” scenarios (variable climate) would use a Population Growth Rate equal to 2.2% for Big City, since the “Water Year Method” scenario is inherited from the “Reference” scenario.

If one wanted to compare, in the same WEAP graph, constant climate and variable climate using a 5% Population Growth Rate, you could create another new scenario inherited from the “Water Year Method” scenario and change the “Population Growth Rate” Key Assumption in this scenario to 5%. The tree structure would look as follows:



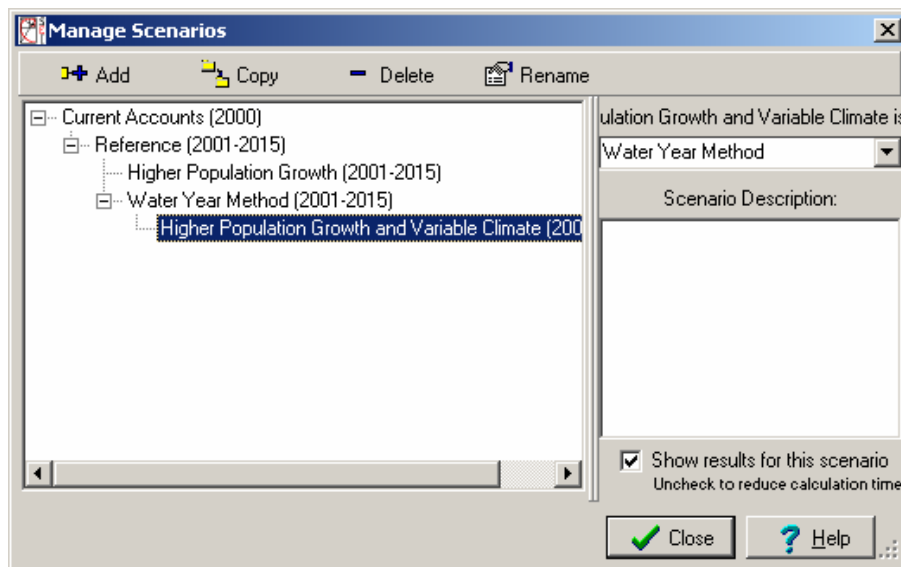


WEAP allows for unlimited versatility in the arrangement of scenarios. Note that you can output results to Excel, which also facilitates results comparisons among scenarios. This feature will be discussed in greater detail in the “Data, Results, and Formatting” module.

## 5. Change Scenario Inheritance

The following example demonstrates the utility of changing scenario inheritance within WEAP.


Create a new scenario inherited from the “Reference” scenario, and name it “Extended Dry Climate Sequence”. The scenario tree structure should look as follows:

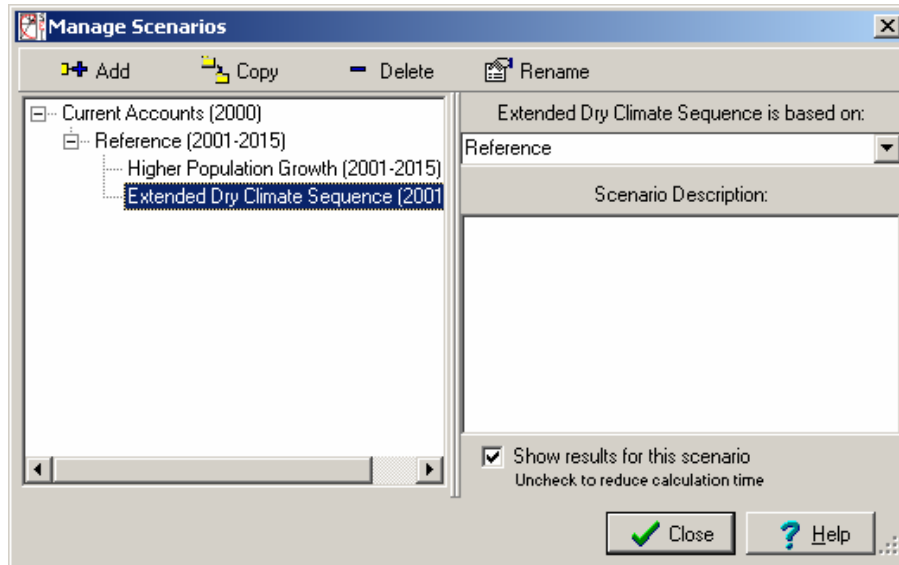


Go to the Data view and select this new scenario for editing. Click on the “Water Year Method” branch of the data tree (below Hydrology) to edit the climate sequence as follows:

2001-2003	<i>normal</i>
2004	<i>wet</i>
2005	<i>normal</i>
2006-2008	<i>normal</i>
2009-2010	<i>very dry</i>
2011	<i>normal</i>
2012	<i>dry</i>
2013	<i>normal</i>
2014	<i>normal</i>
2015	<i>dry</i>

The results (shown below) indicate that Big City “Unmet Demand” for the “Extended Dry Climate Sequence” (new climate sequence and a 2.2 % Population Growth Rate) falls somewhat in between those for the “Reference” scenario (original climate sequence and a 2.2 % Population Growth Rate) and the “Higher Population Growth Rate” scenario (original climate sequence, but a 5% Population Growth Rate).

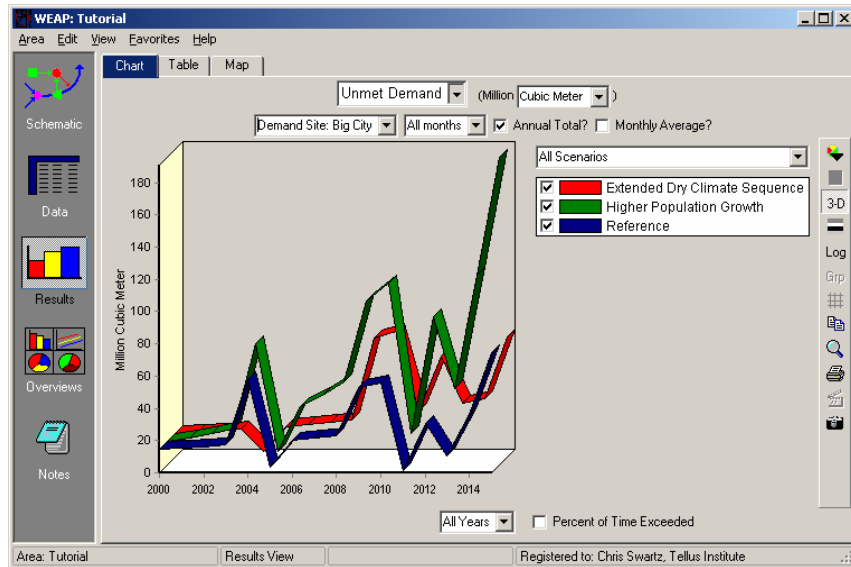


Now, we will change the Scenario Inheritance of the “Extended Dry Climate Sequence” scenario, placing it under the “Higher Population Growth Rate” scenario so that it inherits the 5% Population Growth Rate of that scenario. In the Scenario Manager, select the “Extended Dry Climate Sequence” scenario, click on the drop down list to the right (below the text saying “Extended Dry Climate Sequence is based on:”) and select “Higher Population Growth” as the new parent scenario.

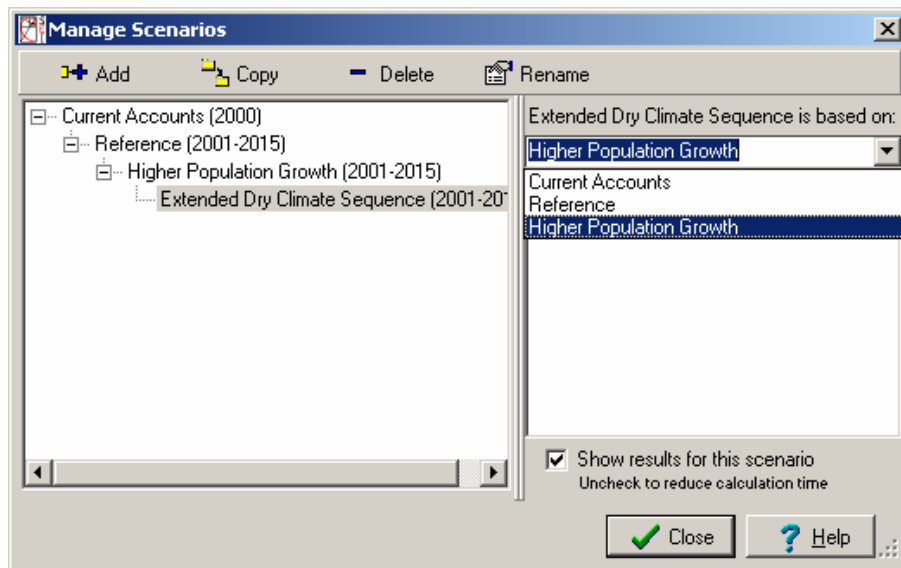

Now, recalculate the results and look again at “Unmet Demand” for Big City.

What changes do you notice to the unmet demand for the “Extended Dry Climate Sequence” scenario?

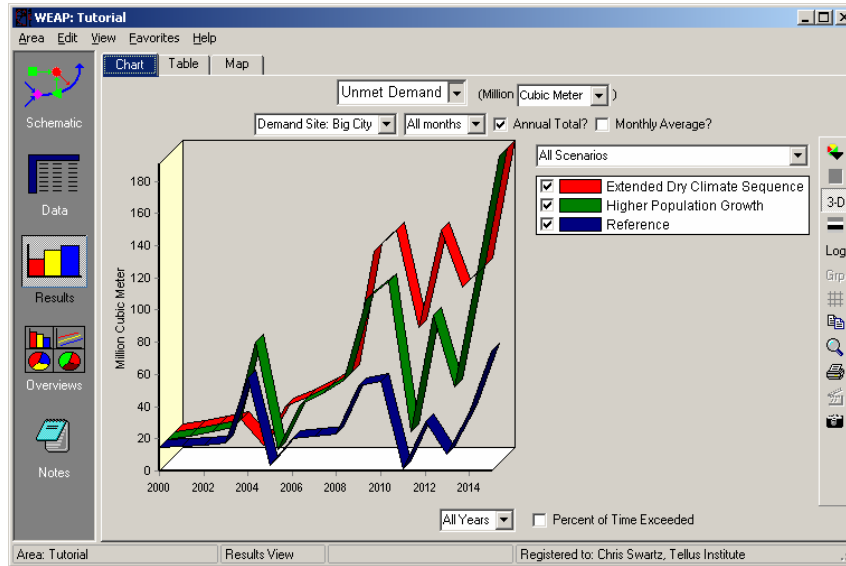

With the higher population growth rate and drier climate, Unmet Demand increases substantially.

---

**WEAP**

**Water Evaluation And Planning System**

# **Refining the Demand Analysis**

***A TUTORIAL ON***

<i>Disaggregating Demand.....</i>	<i>70</i>
<i>Modeling Demand Side Management, Losses and Reuse.....</i>	<i>76</i>
<i>Setting Demand Allocation Priorities .....</i>	<i>86</i>

**November 2005**



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.sei.org/weap>

**Note:**


For this module you will need to have completed the previous modules (“WEAP in One Hour, Basic Tools, and Scenarios) or have a fair knowledge of WEAP (data structure, Key Assumptions, Expression Builder, creating scenarios). To begin this module, go to the Main Menu, select “Revert to Version” and choose the version named “Starting Point for all modules after ‘Scenarios’ module.”

## Disaggregating Demand

### 1. Create a new Demand Site


In the Current Accounts, create a new demand site downstream of Big City to simulate rural demand. Name this node “Rural” and give it a *Demand Priority* = 1. Provide a Transmission Link from the Main River positioned downstream of both the Big City and Agriculture Return Flows. *The Supply Preference should be set to 1*. Also provide a Return Flow for Rural that is positioned further downstream. *Provide a Return Flow Routing equal to 100%*.

Your area should now look as follows:

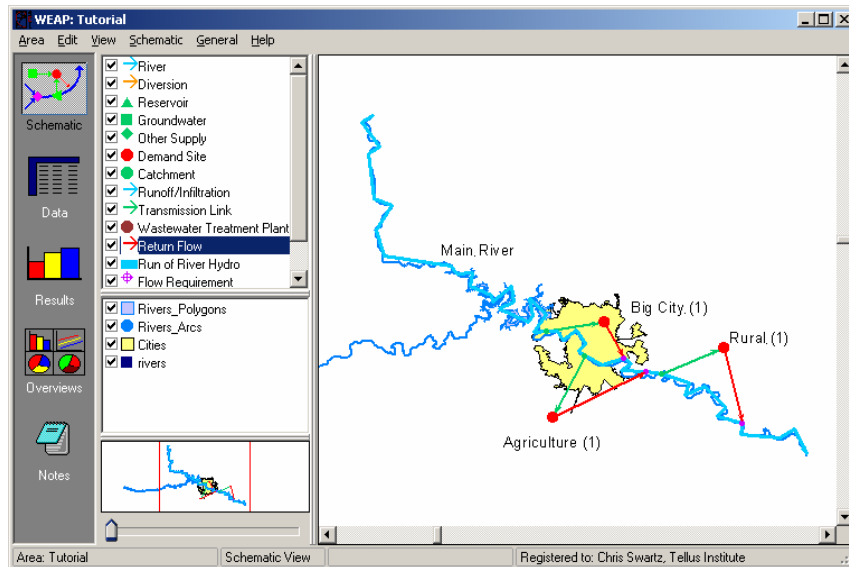


### 2. Create the Data Structure for “Rural” demand node

In order to create a data structure, right-click the “Rural” demand site in the data view tree, and select “Add” to implement the following structure (do not enter any data yet):

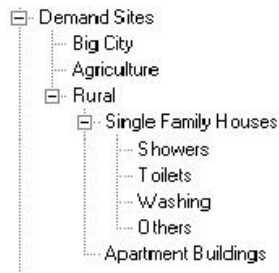



Note that “Showers”, “Toilets”, “Washing”, and “Others” are added as sub-branches below “Single Family Houses”.

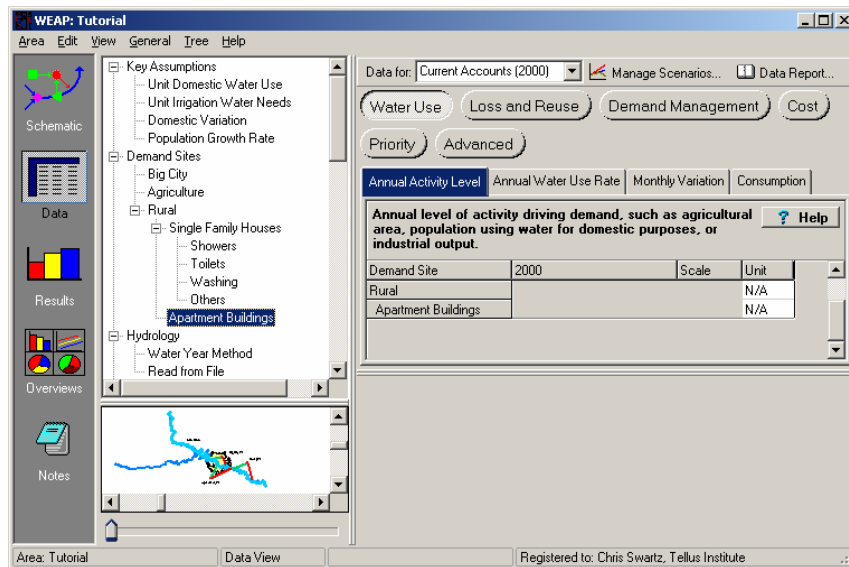

### 3. Enter the Annual Activity Level data

Enter the following data under the Rural Demand Site, Annual Activity Level tab:

<i>Rural</i>	<i>120,000 Households</i>
<i>Single Family Houses</i>	<i>70% Share</i>
<i>Showers</i>	<i>80% Saturation</i>
<i>Toilets</i>	<i>90% Saturation</i>
<i>Washing</i>	<i>55% Saturation</i>
<i>Others</i>	<i>35% Saturation</i>
<i>Apartment Buildings</i>	<i>Remainder share (use the Expression Builder)</i>

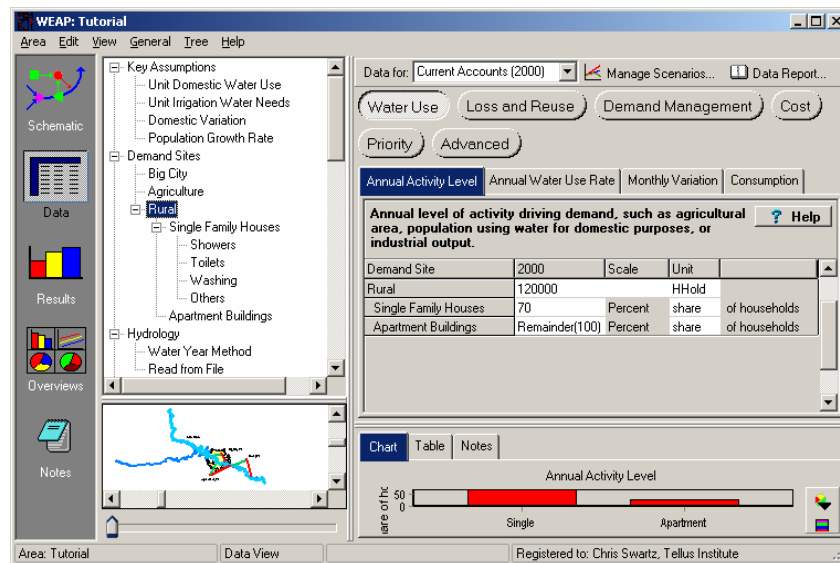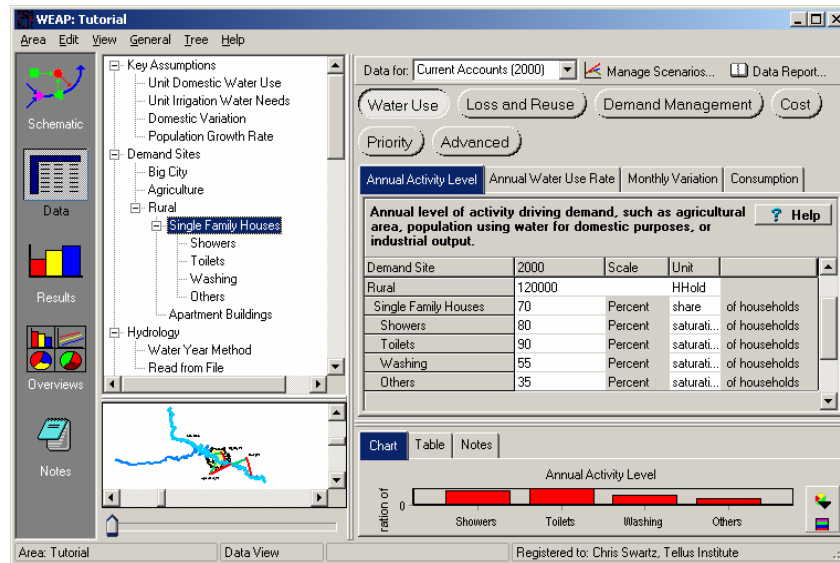

Share vs. Saturation: even though both types of percentages are treated mathematically the same by WEAP, they are conceptually different. At a given level of the tree, shares should always sum up to 100%. They also allow the use of the “remainder” function. Saturation indicates the penetration rate for a particular device and is independent of the penetration rate for other devices (i.e., saturation rates for all sub-branches within a given branch do not have to sum to 100).



#### 4. Enter the Annual Water Use Rate data




Enter the following data under the “Rural” demand site, “Annual Water Use Rate” tab.

<i>Rural</i>	
<i>Single Family Houses</i>	
<i>Showers</i>	<i>80 m<sup>3</sup>/household</i>
<i>Toilets</i>	<i>120 m<sup>3</sup>/household</i>
<i>Washing</i>	<i>60 m<sup>3</sup>/household</i>
<i>Others</i>	<i>40 m<sup>3</sup>/household</i>
<i>Apartment Buildings</i>	<i>220 m<sup>3</sup>/household</i>
<i>Consumption (in consumption tab)</i>	<i>80%</i>


*Note that the “Consumption” value is entered for the entire Rural demand node, and not the sub-branches.*

#### 5. Check the results

Recalculate your results. In the Results view, choose “Water Demand” as the primary variable from the pull down menu. Select “All Branches” from the pull-down menu directly above the graph legend. Select 3-D and bar graph as the format using the pull-down menu for the “Chart Type” icon on the vertical graphing toolbar (see first and second screen shot below). Select the Rural demand node from the pull down menu above the graph (see third screen shot below).

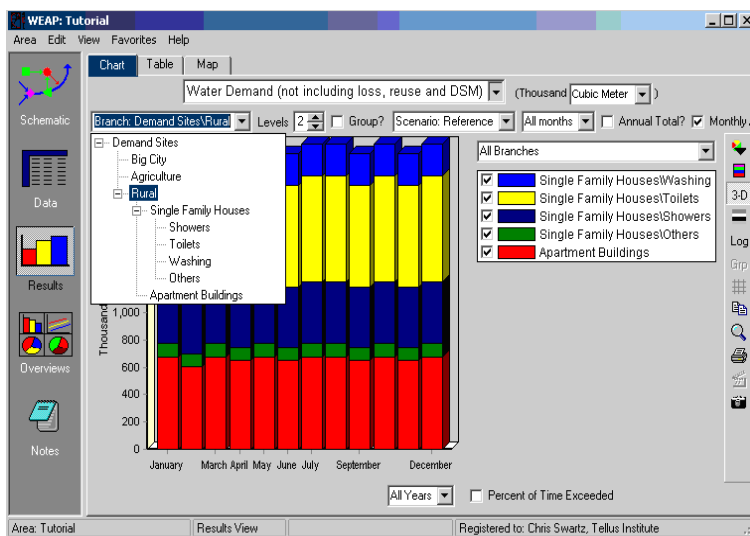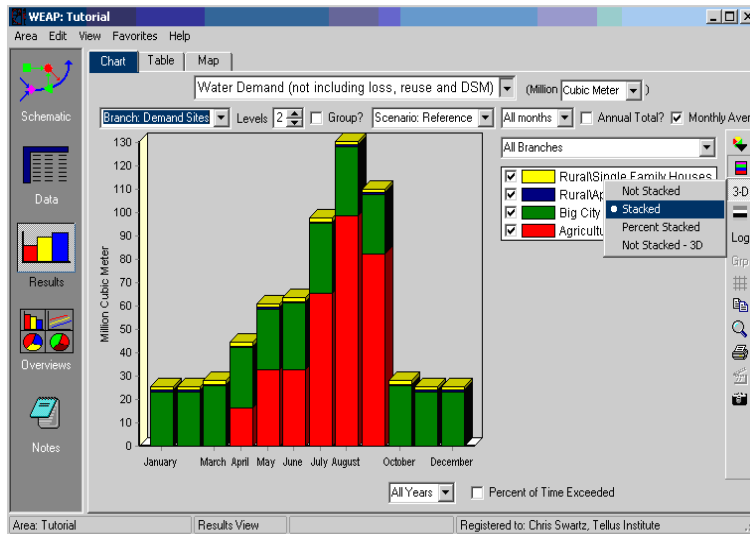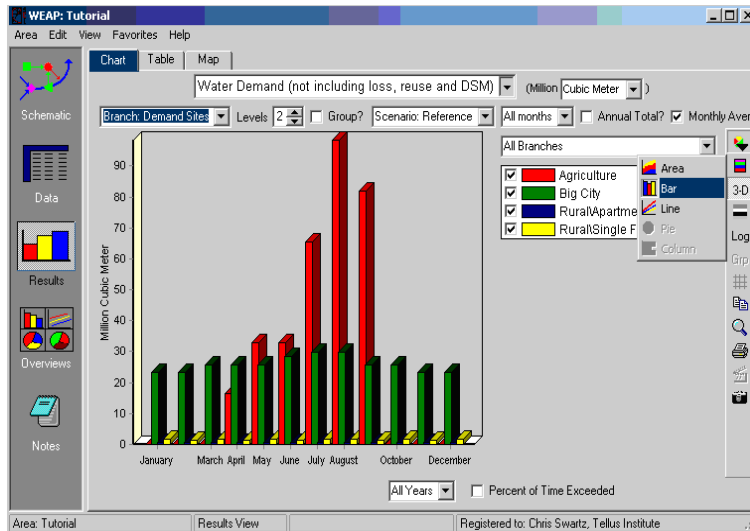

In order to view Water Demand results for all of the Rural sub-branches (e.g., Single Family Houses\Showers; Apartment Buildings), toggle up to Level 2 on the “Levels” selection field (directly above the center of the graph). The resulting graph should look like the one below:

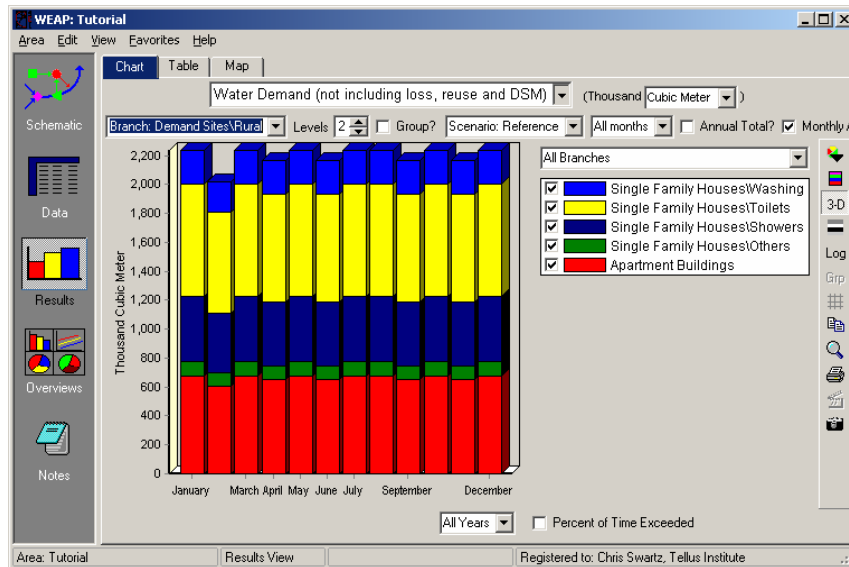


*Do you understand why the Rural demand varies along the year even though we have not entered any variation?*



The variation in Rural demand is due to the fact that WEAP assumes a constant daily demand per day (no monthly demand was specified by the user), so months that have less days (like February) have a lower demand than months that have more days (like January).

Now create a 3-D graph of “Demand Site Coverage” and select all demand sites for presentation (the pull-down menu to do the latter is to the right of the graph; see below).

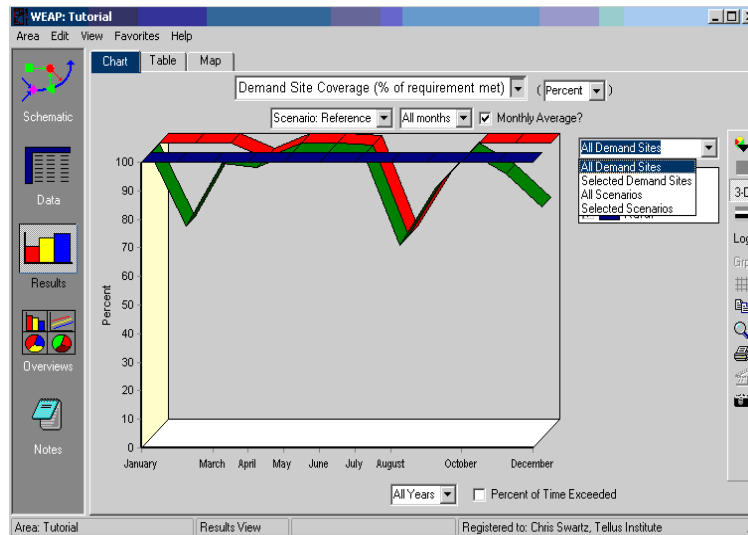

*Do you understand why Coverage is always 100% for Rural but not for Big City and Agriculture, even though they all have the same demand priority level?*




The Rural withdrawal point is downstream of the return flow point for the Big City, which means there is an additional volume of water available in the river; this return flow can easily cover the rather small Rural demand.

## Modeling Demand Side Management, Losses and Reuse

### 1. Implement Demand Side Management - the disaggregated approach


We will now create a new scenario that explores a demand side management strategy. Call this scenario “New Washing Machines DSM”; it is to be inherited from the “Reference” scenario so it will have the same climate and Big City population growth rate as the “Reference” scenario. The scenario tree in the Manage Scenarios window should look like this:

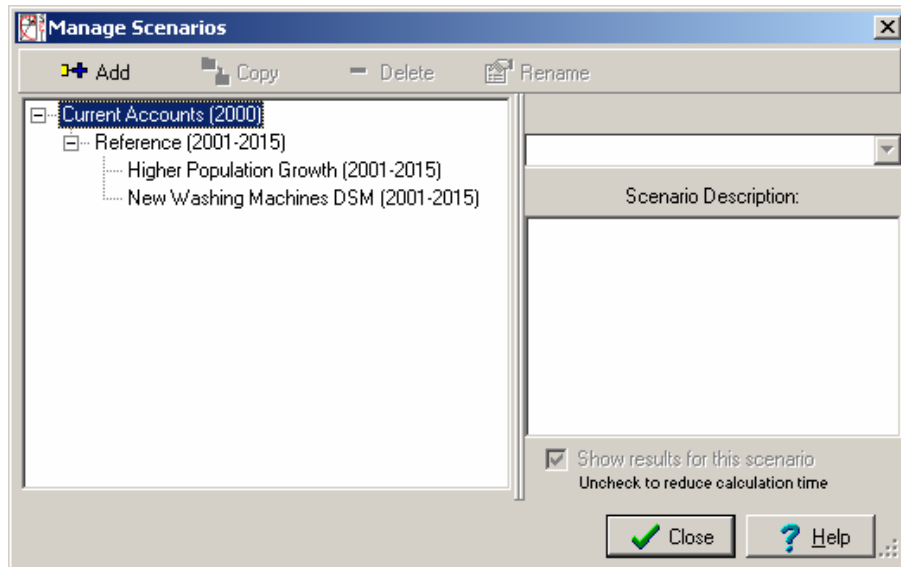


We will assume that a new type of washing machines allows a 2/3 reduction (66.7%) in washing water consumption. This new scenario will evaluate the impact of this Demand Side Management measure if 50% of the households can be convinced to purchase the water-saving machine.

First, go back to Current Accounts in the Data view, where you will create two new branches (Old Machines and New Machines) in the Rural data structure. Effectively, you are disaggregating the “Washing” variable to now include two new sub-categories. *Note that you must return to Current Accounts because all new data structures have to be entered in Current Accounts, even if the variable is not to be activated (i.e., given non-zero activity levels) in the Current Accounts and “Reference” scenario.*


When you go to add the first sub-branch under Washing, you will get the following message:

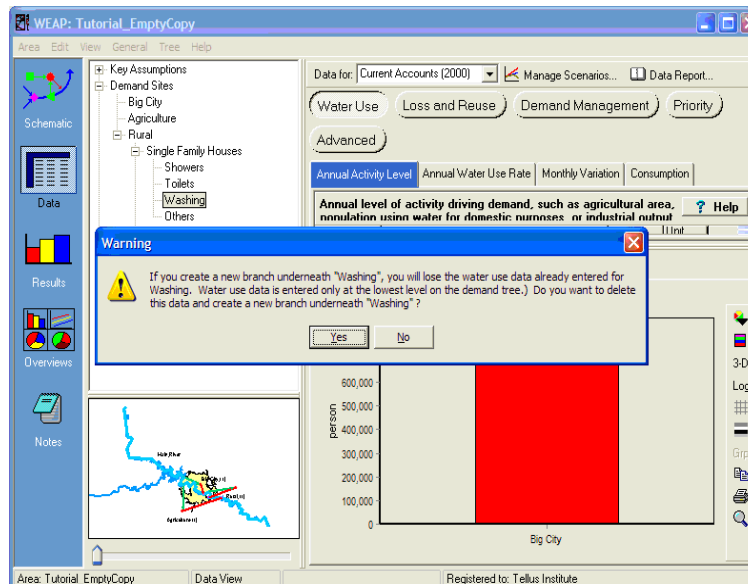


Click yes, and add the following structure:



Change the units for “Old Machines” and “New Machines” to “Shares”.  
 Reenter the Water Use Rate for Old Machines (60 m<sup>3</sup>/household), as was the value for the original higher level variable “Washing”.

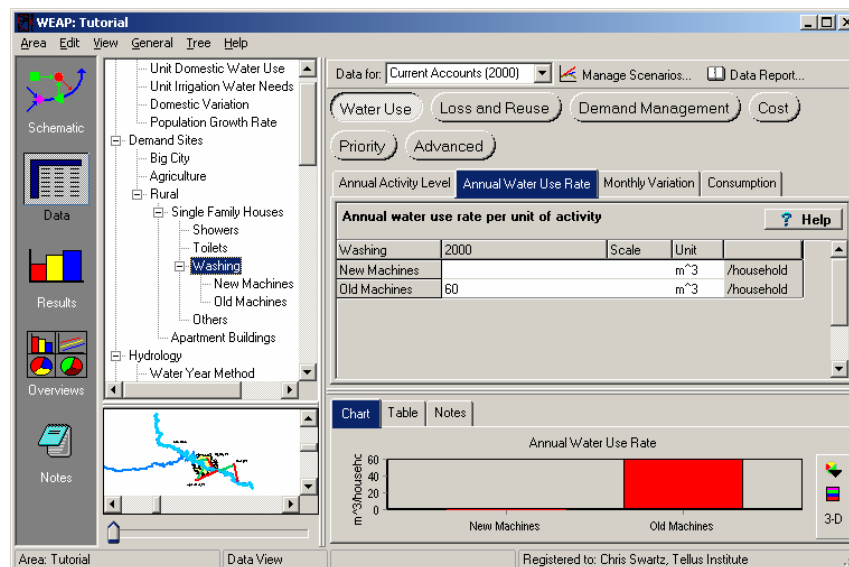

Enter a value of 100% for the “Old Machines Activity Level”. Leave blank the Activity Level for “New Machines” - this is the same as entering a zero. Remember, you are entering these in the Current Accounts, so you want only the “Old Machines” to be active in the “Reference” scenario. This recreates the same effect as having the aggregated variable “Washing” in the original Current Accounts and “Reference” scenario. The “New Machines” variable will be activated in the “New Washing Machines DSM” scenario (see below).

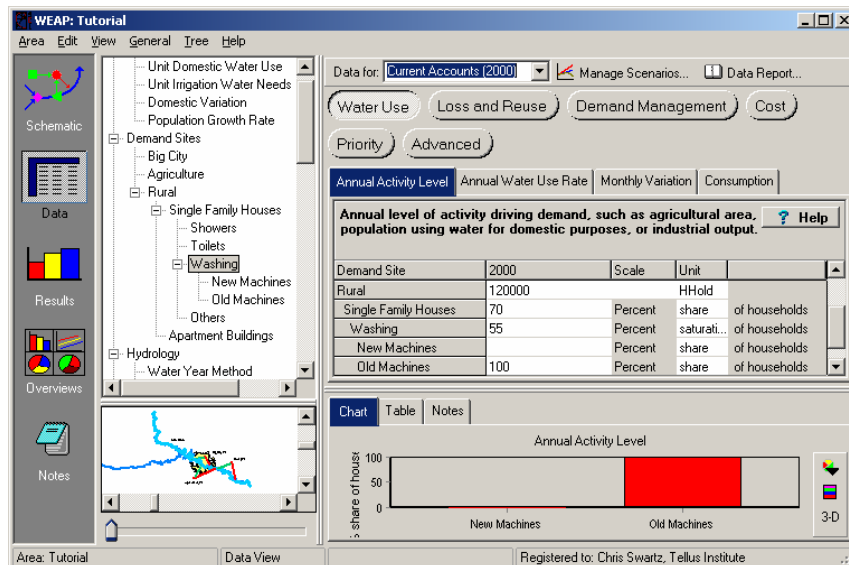


The screenshot shows the WEAP software interface with the 'Annual Activity Level' tab selected. The table below is visible in the interface:

Demand Site	2000	Scale	Unit	
Rural	120000		HHold	
Single Family Houses	70	Percent	share	of households
Washing	55	Percent	saturation	of households
New Machines		Percent	share	of households
Old Machines	100	Percent	share	of households

Below the table, a chart titled 'Annual Activity Level' shows a horizontal bar with a red segment for 'Old Machines' and a grey segment for 'New Machines'. The y-axis is labeled 'share of house' and ranges from 0 to 100.

Now, switch to the “New Washing Machines DSM” scenario.


Input a value of 50 for New Machines (50% of all washing machines will be this new variety) and Remainder(100) for Old Machines (use the Expression Builder for the latter).

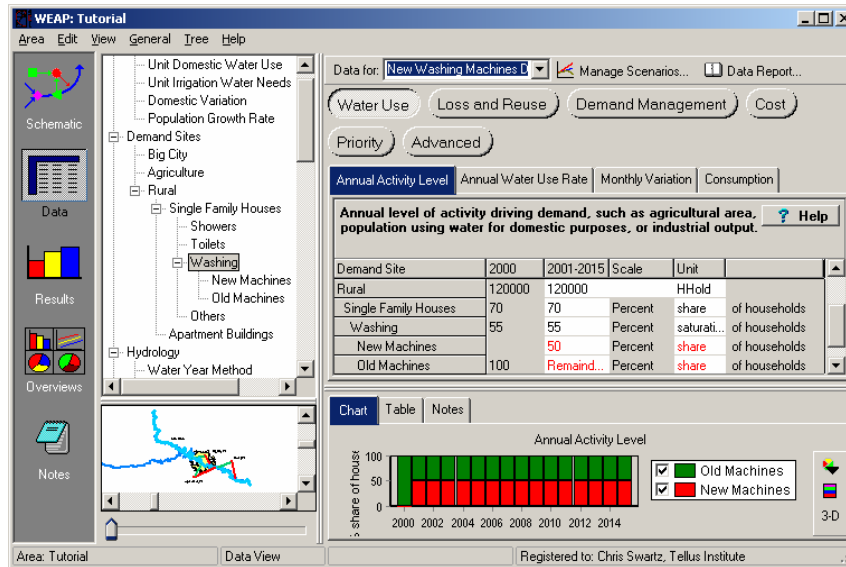

You will have to input again the original Water Use Rate for the Old Machines (60 m<sup>3</sup>/household) as well as the new Water Use Rate for the New Machines:

Old Machines                      60 m<sup>3</sup>/household


New Machines                      60\*0.667 m<sup>3</sup>/household

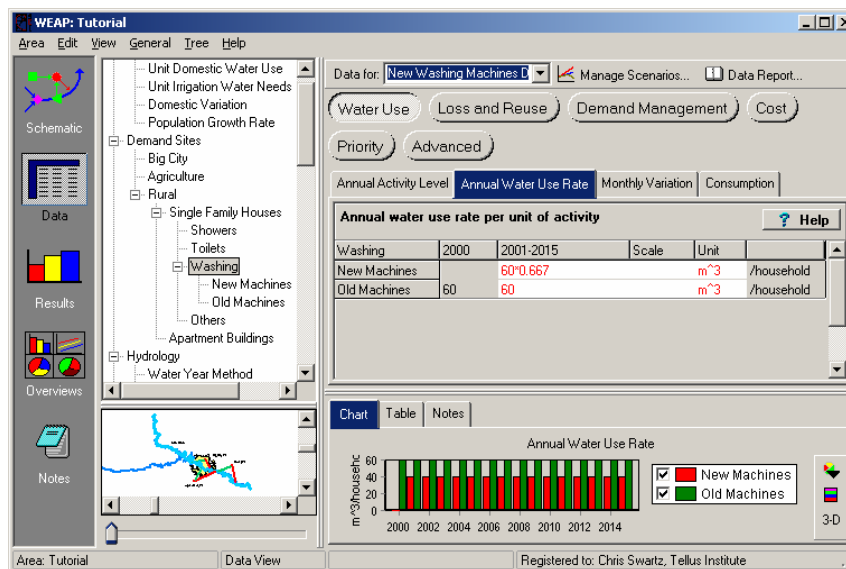

Now compare the numerical Water Demand results for the Washing branch of the Rural demand site for the “Reference” and “New Washing Machines



DSM” scenarios. In the Results view, click on the Table tab and select the Water Demand variable. Also select “Annual Total” rather than “Monthly Average” and choose 2001 (you can only view numerical results for one individual year at a time when comparing scenarios in the Table view, but this does not present a difficulty for this example, as we do not try to model any growth with time for the Washing variable). Choose Demand Sites \ Rural \ Washing \ Single Family Houses \ Washing from the upper left pull-down menu and “All Branches” from the upper right pull-down menu. Select the “Reference” and “New Washing Machines DSM” scenarios from the pull-down menu at the bottom of the window. The table should look like the following:

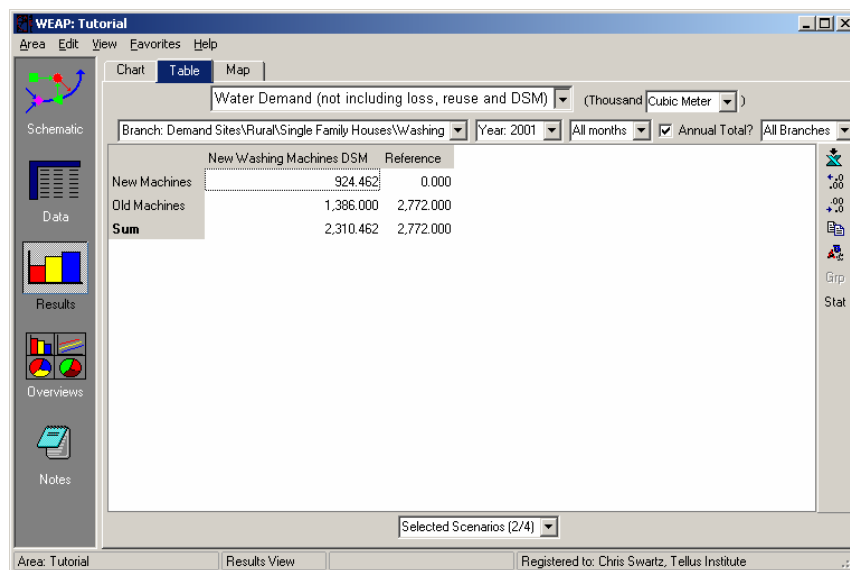

	New Washing Machines DSM	Reference
New Machines	924,462	0.000
Old Machines	1,386,000	2,772,000
<b>Sum</b>	<b>2,310,462</b>	<b>2,772,000</b>

Note that the use of the New Machines in 2001 (and all subsequent years in the “New Washing Machines DSM” scenario period) results in about 460000 m<sup>3</sup> less water demand than if only Old Machines are used (Reference scenario).



Demand-side management (DSM) refers to measures that can be taken on the consumer’s side of the meter to change the amount or timing of water consumption (as compared to the utility company’s, or supply, side of the meter).


Another way of modeling disaggregated DSM is to reduce the unit consumption for the affected category (in this case washing). There is no right or wrong way to model DSM.

## 2. Implement Demand Side Management - the aggregated approach

If disaggregated data is not available, an equivalent value of DSM can be computed. In this example, assuming we had not disaggregated the Rural water demand, we could come to the same result by using the “Demand Management” option for this Demand Site in the Data view. In this case the reduction would amount to:

<i>Original contribution of washing to rural water use</i>	$2,772/26,316 =$	10.5%
<i>Share of New Machines</i>		50%
<i>Reduction of New Machines</i>		66.6%
<i>Multiplying all of these percentages together =</i>		3.5%


*This value could be entered in the “Demand Management/Demand Savings” tab for the Rural branch of a Demand Side Management scenario.*

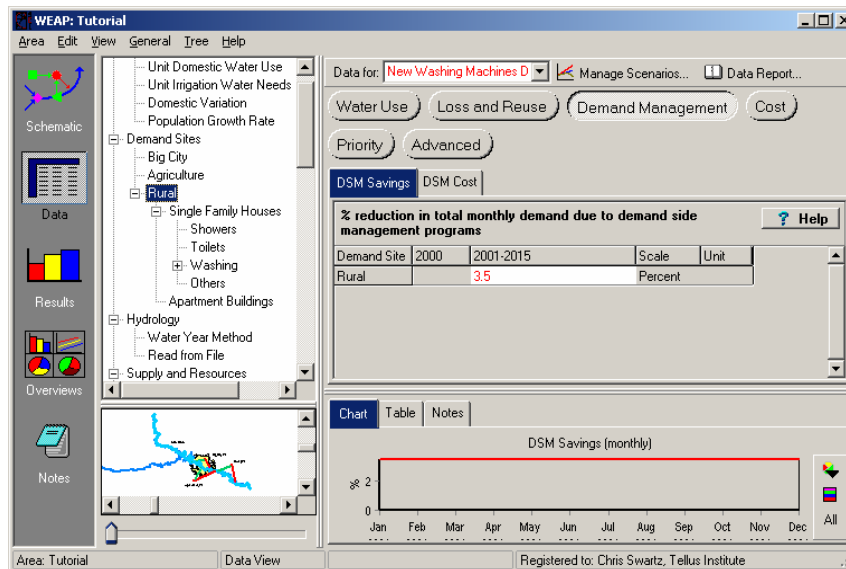

Demand Side Management (DSM) measures are not taken into account in the demand view. To see the effect of a DSM measure, look at the change in Supply Requirement rather than Water Demand.

### 3. Model Reuse


Another water conservation strategy that could be studied with scenarios is water reuse. Create a new scenario inherited from the “Reference” scenario and name it “Big City Reuse”. Make sure you are in this new scenario and click on the Big City branch. Click on the “Loss and Reuse” button and click the “Reuse” tab.

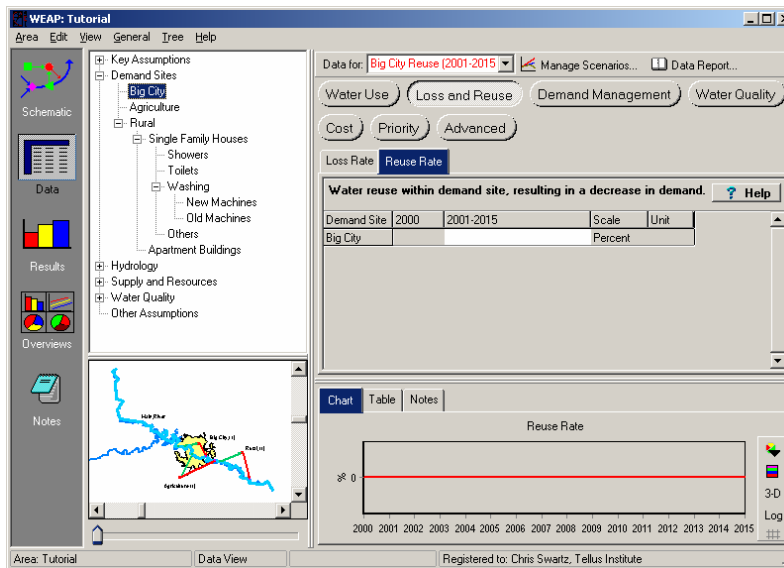


Enter the following expression in the 2001-2015 field using the Expression Builder:

*Smooth(2001,5, 2005,18, 2015,25)*

First, pull the “Smooth” function into the text field of the Expression builder and select “Smooth” from the options. Click “Next” and enter the data values. You should get a plot like the one below. Note that Reuse in the Current Accounts (2000) remains zero. Click “Finish”.

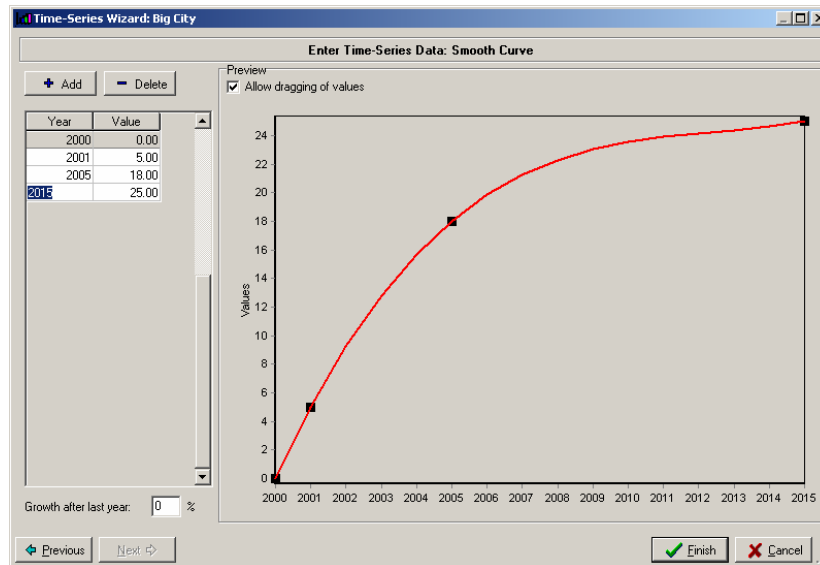


Compare Unmet Demand for Big City before (Reference) and after (Big City Reuse) instituting this conservation strategy. You should get the graph below, which shows substantial reductions in Big City Unmet Demand when the water reuse strategy is used.

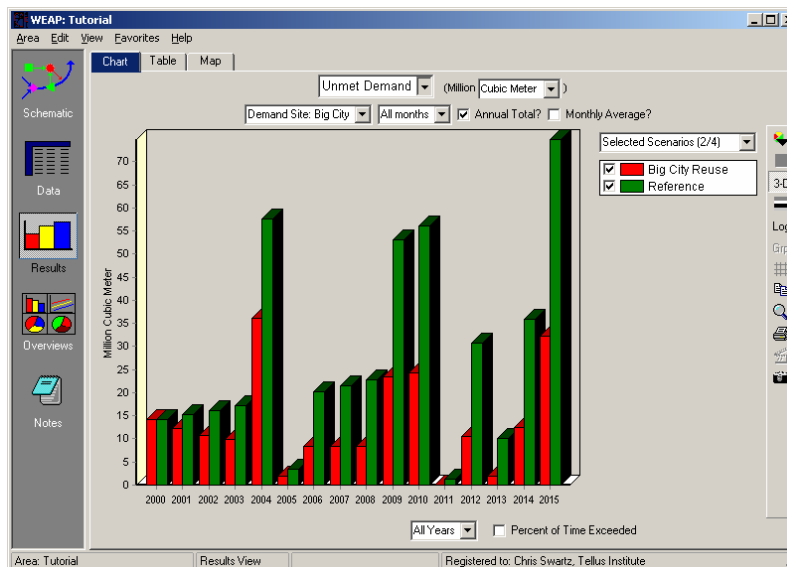


#### 4. Model Losses

Re-edit the model to take into account the fact that there is a 20% loss rate in the network of Big City. Make this change for the Current Accounts so that it will be carried through the "Reference" scenario, and as a result of the inheritance feature, throughout all scenarios.

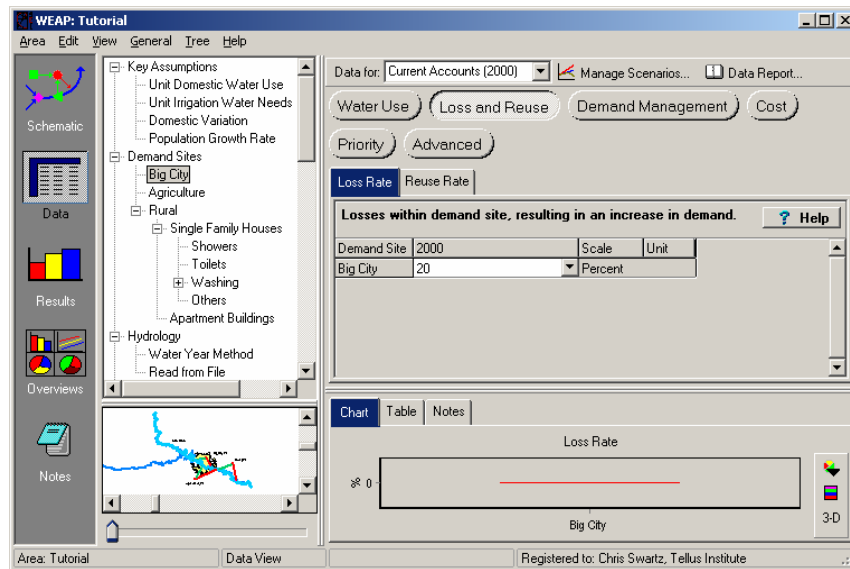

*What happens to the unmet demand for the Big City, both in the “Reference” scenario and the “Big City Reuse” scenario compared to the earlier exercise without losses?*

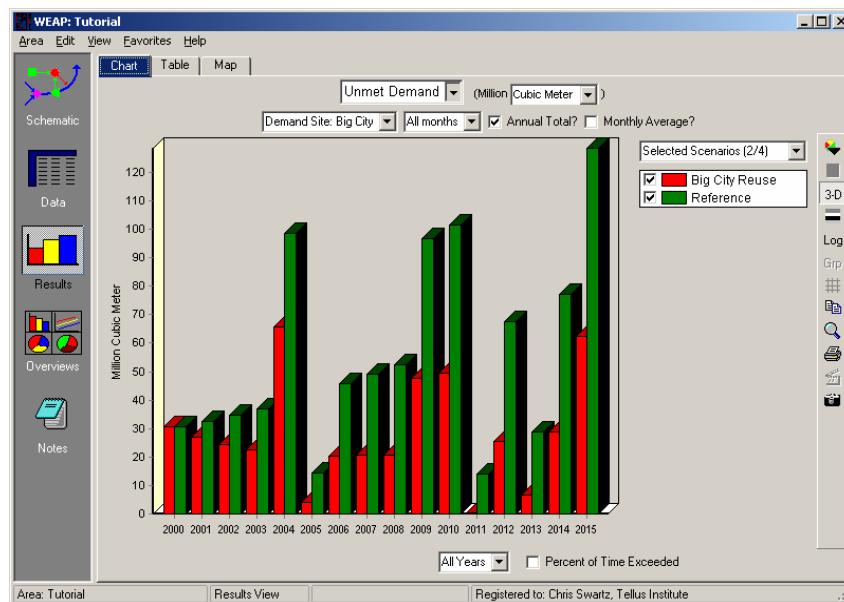

Losses can happen in Transmission Link, in the Demand Site itself or in the Return flow. Losses in the Transmission Link will affect the supply to the Demand Site. Losses in the Demand Site will affect the required Supply Requirements of this Demand Site. Losses in the Return Flow will only affect the flow returned.

# Setting Demand Allocation Priorities

## 1. Edit Demand Site Priority

Create a new scenario, inherited from the "Reference", and name it "Changing Demand Priorities". Change the Demand Priority of the Agriculture Demand Site in the Data view by clicking on the Agriculture branch and then clicking on the Priority button, or by clicking on the node in the Schematic View and selecting "General Info".

*Change the Demand Priority from 1 to 2.*

The screenshot shows the WEAP Tutorial software interface. The 'Data for: Changing Demand Priorities' window is open, displaying the 'Demand Priority' settings for the 'Agriculture' demand site. The 'Priority' tab is selected, showing a table with the following data:

Demand Site	2000	2001-2015
Agriculture	1	2

Below the table, a bar chart titled 'Demand Priority' shows the priority values over time from 2000 to 2014. The priority is 1 for 2000 and 2 for 2001-2014.

A demand priority can be any whole number between 1 and 99 (99 is the default) and allows the user to specify the order in which the water requirements of demand sites are satisfied. WEAP will attempt to satisfy the water requirement of a demand site with a demand priority of 1 before a demand site with a demand priority of 2 or greater. If two demand sites have the same priority, WEAP will attempt to satisfy their water requirements equally. Absolute values have no significance for the priority levels; only the relative order matters. For example, if there are two demand sites, the same result will occur if demand priorities are set to 1 and 2 or 1 and 99.




Demand Priorities allow the user to represent in WEAP water allocation as it actually occurs in their system. For example, a downstream farmer may have historical water rights to river water, even though another demand site positioned upstream could extract as much river water as it desired, leaving the farmer with little water in the absence of such water rights. The Demand Priority setting allows the user to set the farmer's priority for water above that of the upstream demand site. Demand Priorities can also change with time or change in a scenario - more advanced subject matter to be dealt with later in the tutorial.

You can also change the Demand Priority in the Data View\“Priority” screen\“Demand Priority” tab.


## 2. Compare Results

Display graphically the Unmet Demand for Agriculture for the “Reference” and “Changing Demand Priorities” scenarios. It should look like the graph below”:

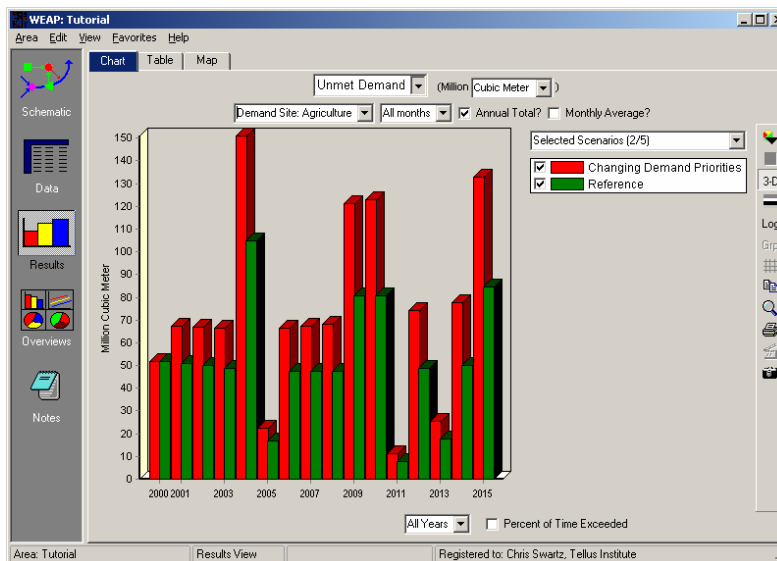


Notice that the Unmet Demand for Agriculture increases when its Demand Priority is raised to 2. This is because Big City now has preference for having

its demand met first. Evidence of this can be observed by generating a graph of the monthly average Demand Coverage for Big City and Agriculture across all years of the Reference scenario.

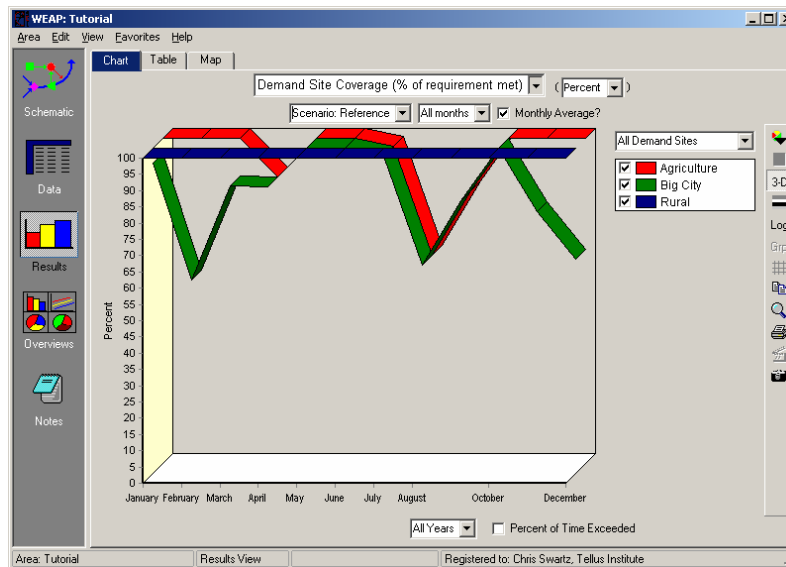

Now compare these results to the same graph generated for the “Changing Demand Priorities” scenario.

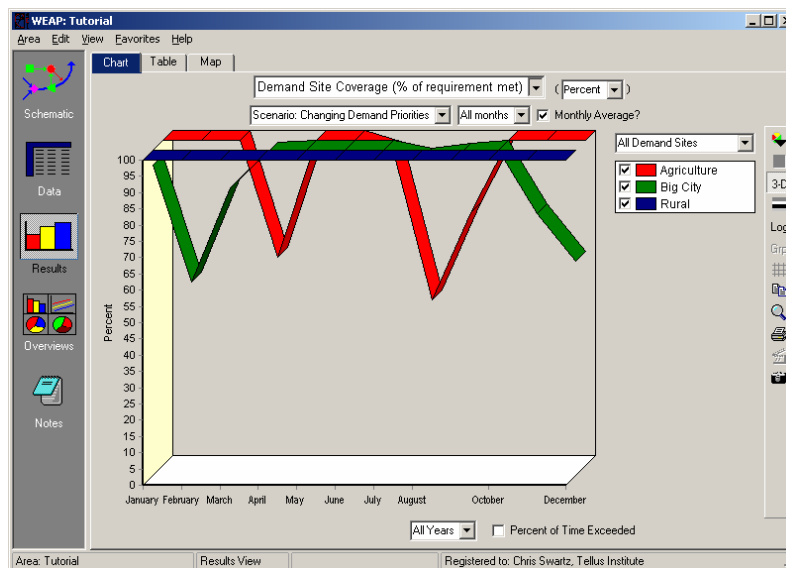



Notice that in the “Reference” scenario, for the spring and late summer months, both Big City and Agriculture do not get full coverage of their demand because they both compete equally for Main River flow. When Big City is given preference for meeting demand (Changing Demand Priorities scenario), however, its coverage improves relative to Agriculture. At times, coverage is 100% for Agriculture, but not for Big City - that is because there is no Agriculture demand (primarily observed for the winter months). Note that the Demand Coverage for the Rural demand site is always 100% - this is because the return flows for Big City and Agriculture satisfy the water demand created by the Rural demand site.



---

# WEAP

Water Evaluation And Planning System

# Refining the Supply

## *A TUTORIAL ON*

<i>Changing Supply Priorities</i> .....	92
<i>Modeling Reservoirs</i> .....	95
<i>Adding Flow Requirements</i> .....	101
<i>Modeling Groundwater Resources</i> .....	105

**November 2005**



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.seib.org/weap>

**Note:**


For this module you will need to have completed the previous modules (“WEAP in One Hour, Basic Tools, and Scenarios) or have a fair knowledge of WEAP (data structure, Key Assumptions, Expression Builder, creating scenarios). To begin this module, go to the Main Menu, select “Revert to Version” and choose the version named “Starting Point for all modules after ‘Scenarios’ module.”

## Changing Supply Priorities

### 1. Create a new Transmission Link for water reuse

Create a new transmission link starting at the Big City Demand Site and ending at the Agriculture Demand Site. This is a conceptual model of reuse of urban wastewater for agriculture purposes. Set the Supply Preference on this Transmission Link to 2.


*Supply Preference*                      2

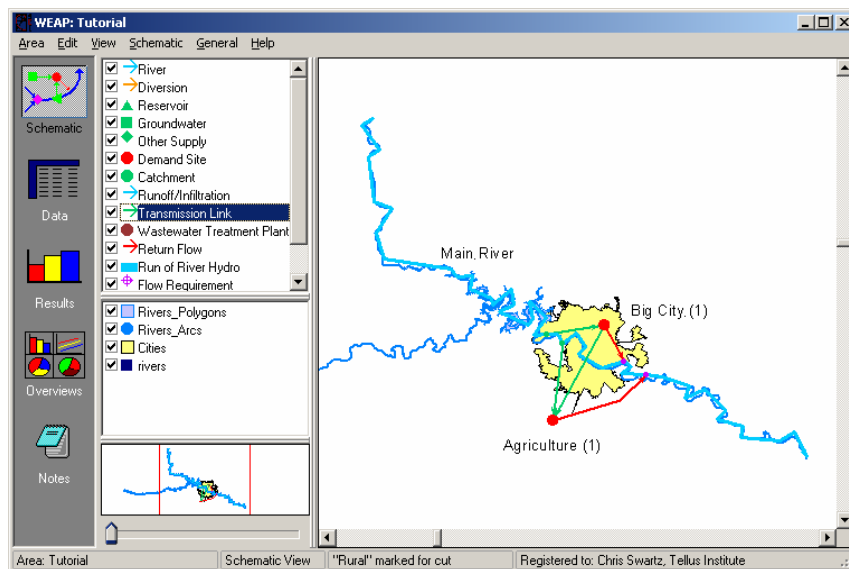

If water quality were a concern, a wastewater treatment plant could have been added to treat the water from Big City before Agriculture received it. Having the treatment plant in the schematic would make it possible to simulate the changes in water quality before and after treatment.


## 2. Results when you change Supply Preferences

Try changing the Supply Preferences of the two links that now supply Agriculture and look at the related results for Demand Site Coverage. To change Supply Preferences, either right click on the Transmission Link in the Schematic view or go to the Data view and click on the appropriate Transmission link below Supply and Resources \ Linking Demands and Supply \ Agriculture.

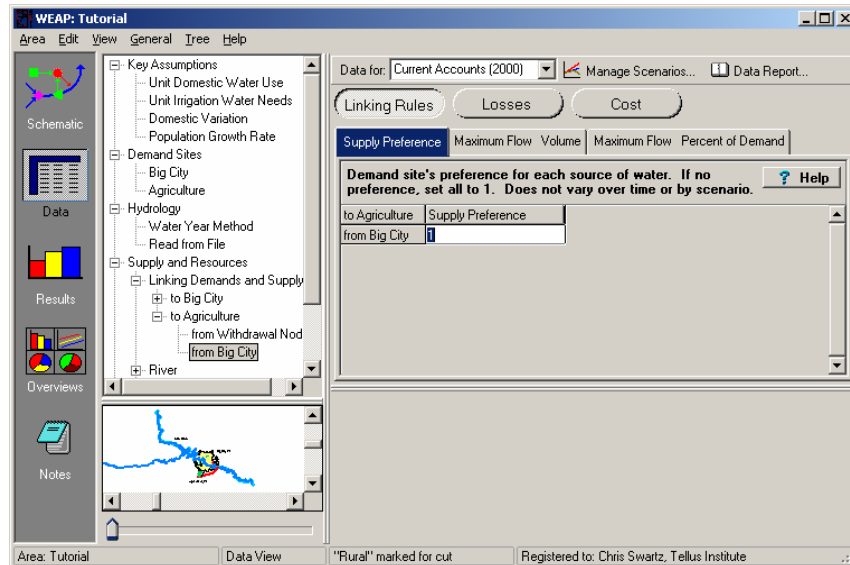


*Try the following combinations:*


*Supply Preferences = 1 from the Main River, 2 from Big City*

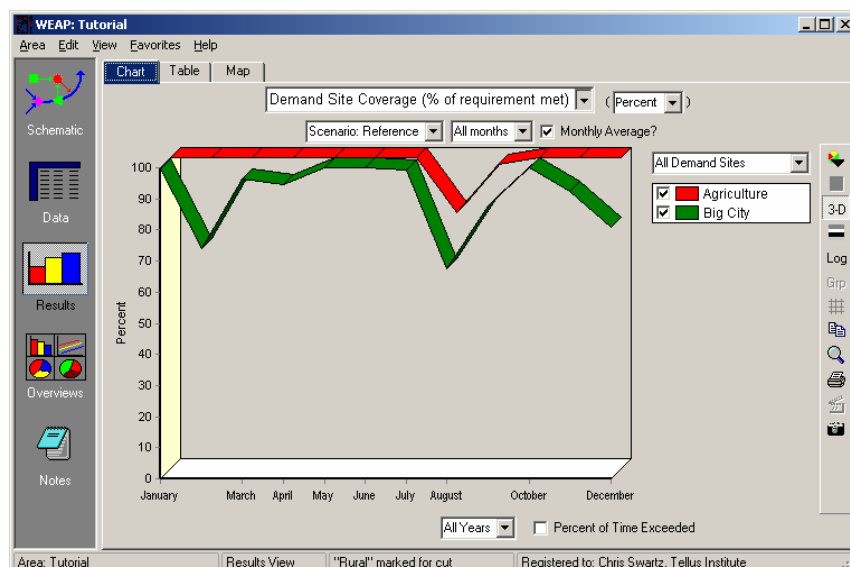

*Supply Preferences = 2 from the Main River, 1 from Big City*

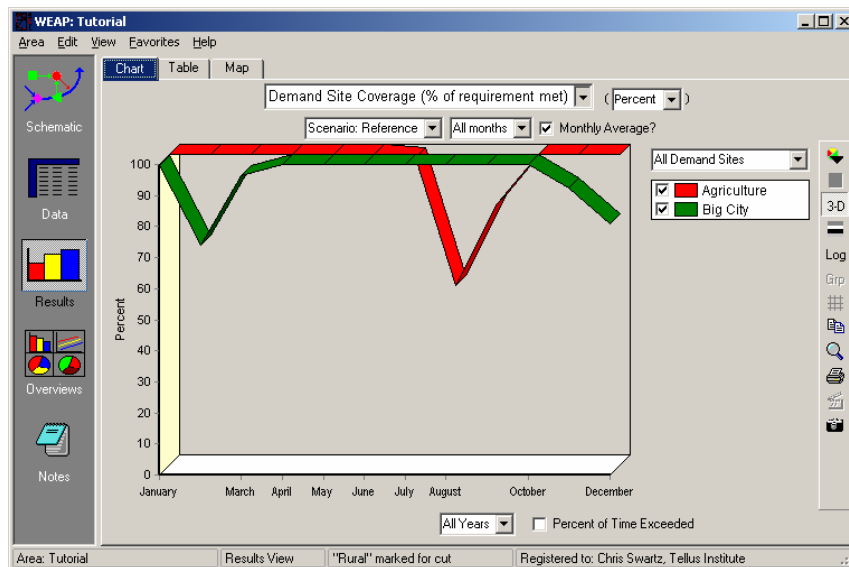

*Supply Preferences = 1 from the Main River and 1 from Big City*

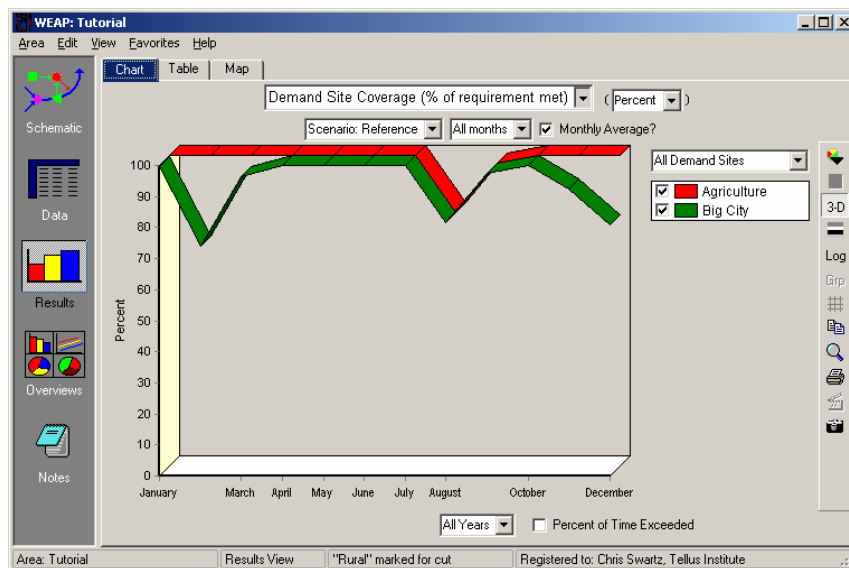

*Do you understand why the differences in Demand Coverage occur when the Supply Preferences change?*



You can modify the display of preferences on the schematic by using the “Schematic\Change the Priority View” menu. The “View Allocation Order” option will display the actual priority order in which WEAP computes supply. This is a function of the Supply Preference of the link as well as the Demand Priority of the demand site.

Note that you can study the impact of changing Supply Preferences, like Demand Priorities, by creating alternative scenarios.


### 3. Revert to original model

You can do this using the “Revert to Version” option under the Area menu. Choose “Starting Point for all modules after Scenarios module” as you did at the beginning of this exercise.

## Modeling Reservoirs

### 1. Create a Reservoir and enter the related data

*First, create a new scenario inherited from “Reference”, and name it “Reservoir Added”.*

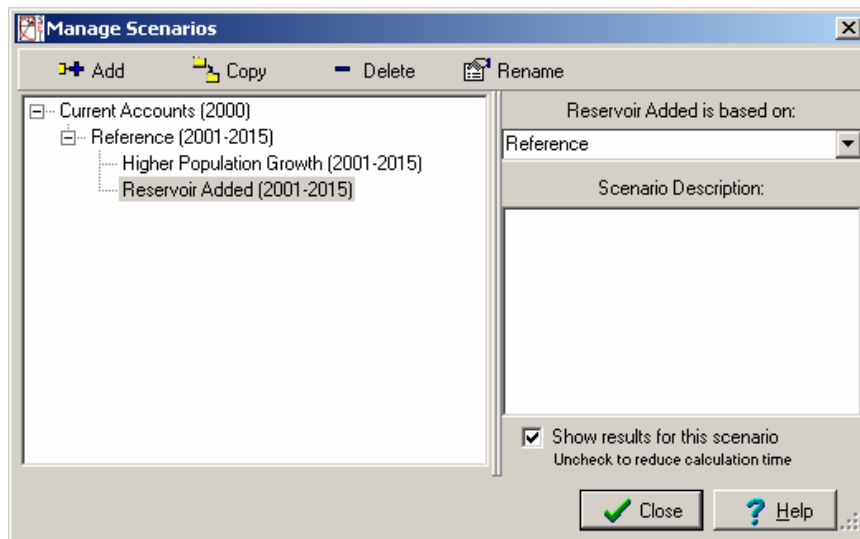

Then add a reservoir object on the Main River upstream of Big City, and name it "Main River Reservoir". Be sure to unclick the box where it asks if this object is active in Current Accounts.

Leave the Demand Priority at 99 (default).

**General Info**

Reservoir

Name


Optional Label for Schematic  
(Use ; for line break)

Active in Current Accounts?

Demand Priority  (for filling reservoir)

Note: 1 is the highest priority, 99 is the lowest


Help Finish Cancel

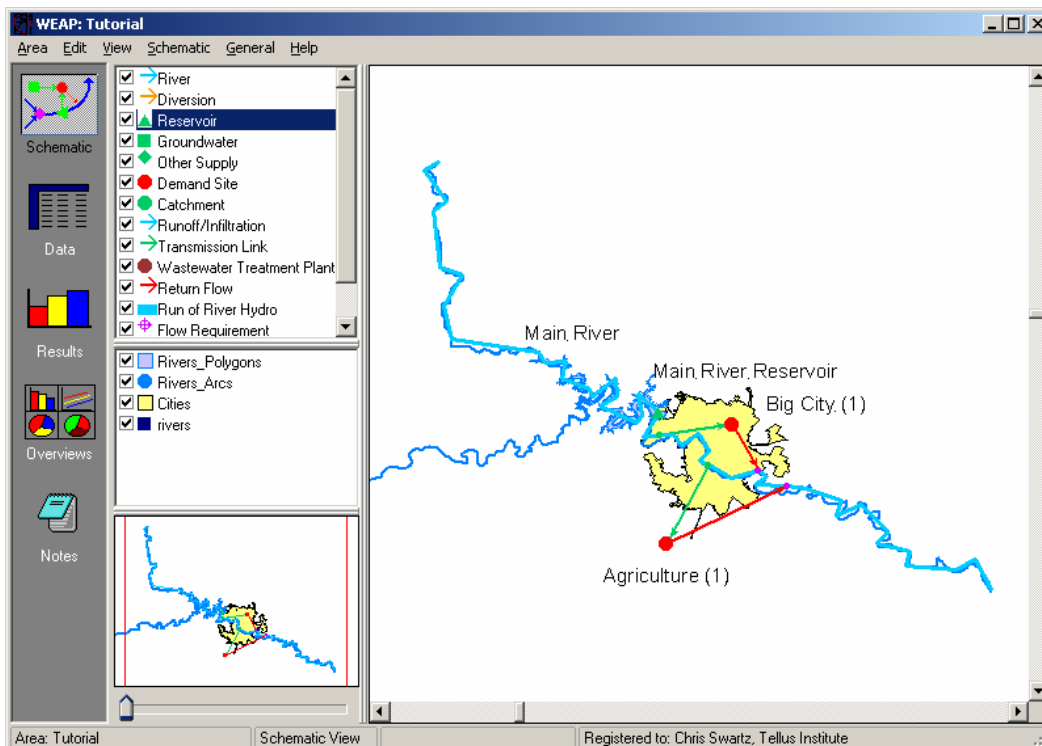

Right click on Main River Reservoir and select "Edit Data". Select the "Storage Capacity" variable to enter the Data view (Make sure you have the "Reservoir Added" scenario selected). Once you are in the Data view, you will first have to click on the "Startup Year" button before you can alter any other parameters.


*Choose 2002 as the startup year for Main River Reservoir*



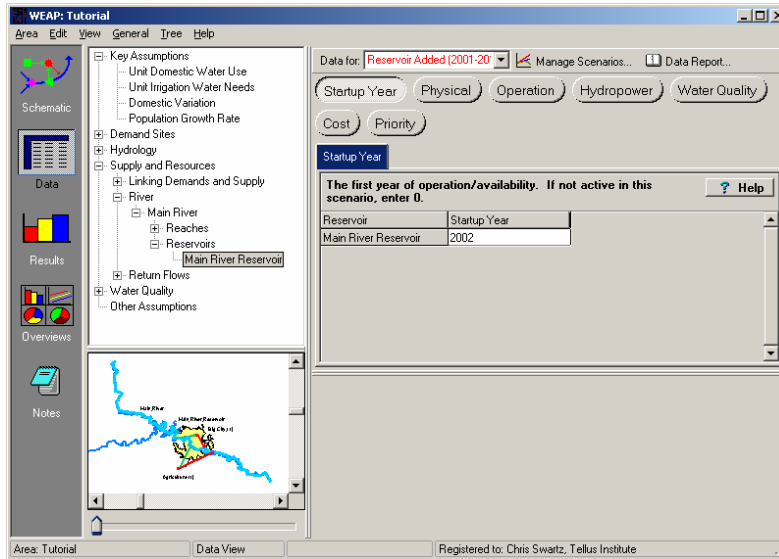

Then click on the “Physical” button and change the following parameters:

*Storage Capacity*                      70 M m<sup>3</sup>  
 Note that the Scale is set to “Million”

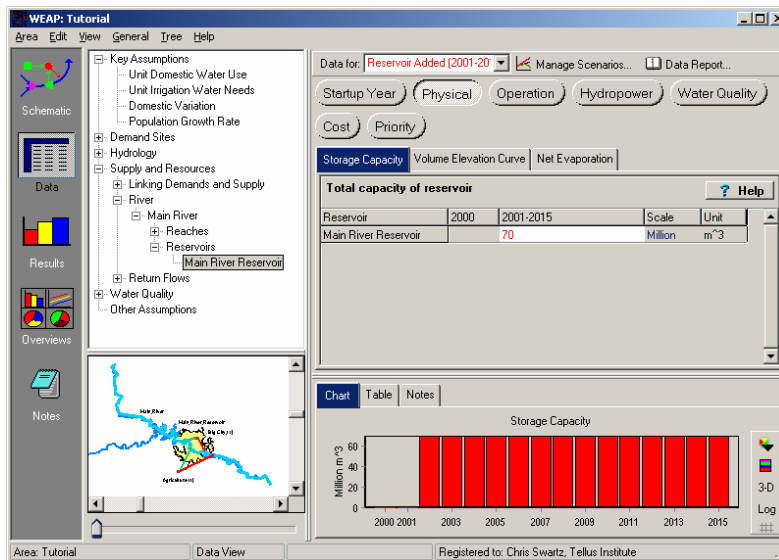


More details about reservoirs operation and hydropower production are provided in the “Reservoirs and Power Production” module of the WEAP tutorial.

## 2. Run the Model and Evaluate the Results


Compare the Demand Site Coverage for Agriculture in the “Reference” and “Reservoir Added” scenarios.

- *Demand Coverage: why does Agriculture have higher coverage with the Main River Reservoir in place?*

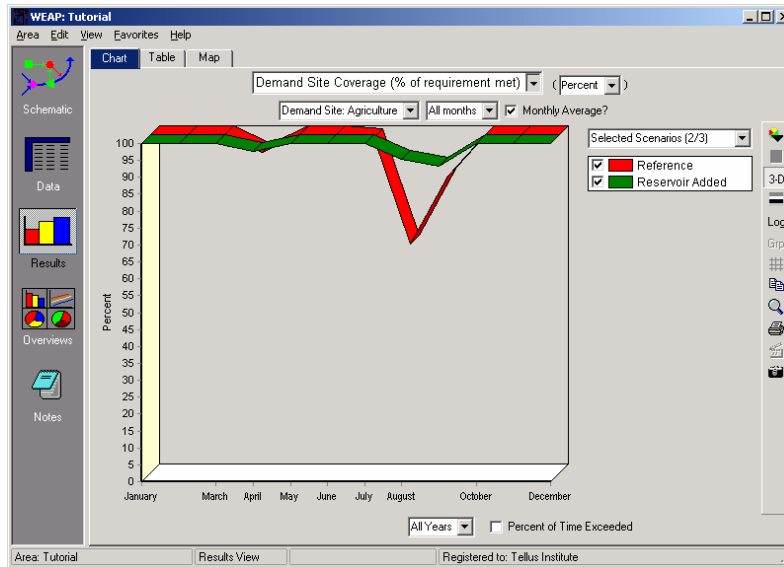

- *Reservoir Storage Volume: does the solution of building a reservoir appear to be sustainable?*


Use the primary variable pull down menu to select Reservoir Storage Volume (under Supply and Resources \ Reservoir), and select “All Years” from the pull down menu at the bottom of the graph.

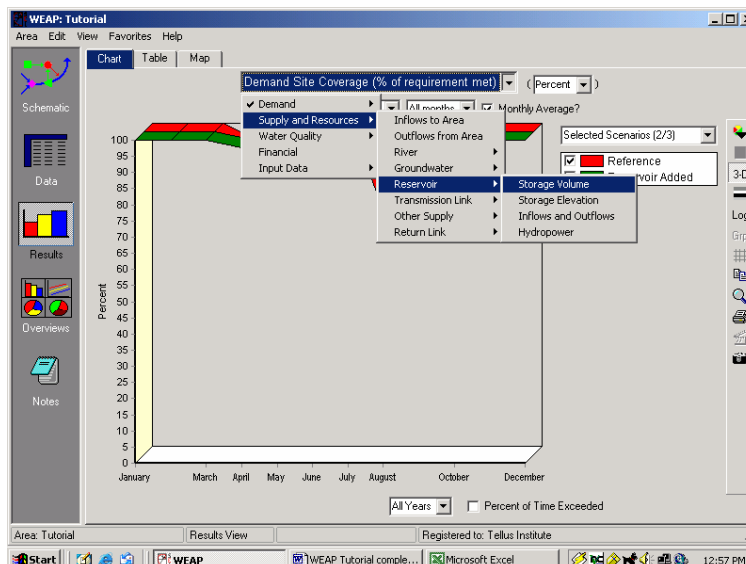




- *Flow in the River: how does having the reservoir on the Main River change the flow downstream compared to the Reference scenario?*

Select Streamflow (under Supply and Resources \ River) from the primary variable pull-down menu and click on “Monthly Average”. Choose the year 2002 from the “Selected Years” option on the bottom menu, and choose the reach below Withdrawal Node 2 for comparison.

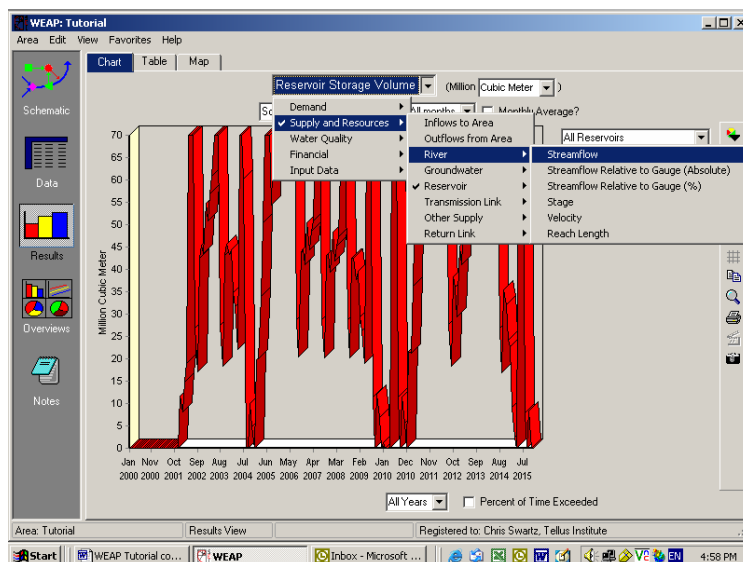

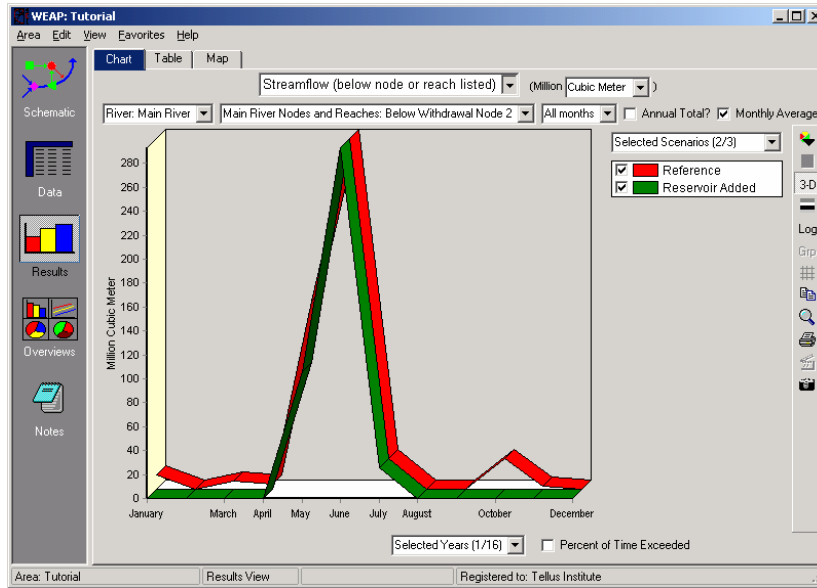


You may want to switch to a logarithmic axis (the button is located on the vertical toolbar on the far right) to see more clearly the differences in flow upstream and downstream of the Main River Reservoir.



Now select the reach below Return Flow Node 1 for comparison.

- *Why is streamflow along this reach more similar for the two scenarios?*

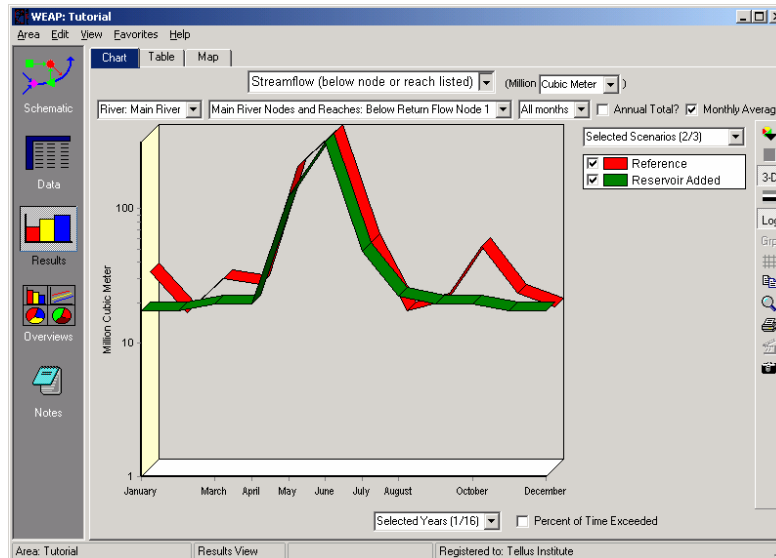


The creation of a large reservoir allows storage of “excess” water during high flow periods to cover water demand during low flow periods. The price to pay is, however, a potentially large impact on the hydrological regime of the river downstream of the reservoir. The Return Flows from Big City and Agriculture provide the flow in the Main River during the spring and winter months. A reservoir’s operation variables and flow requirements can be used to mitigate the reservoir’s downstream impact.

## Adding Flow Requirements


### 1. Create a Flow Requirements

Create another new scenario: “Flow Requirement Added”. This scenario is inherited from the “Reservoir Added” scenario. The scenario tree should look like the one below:

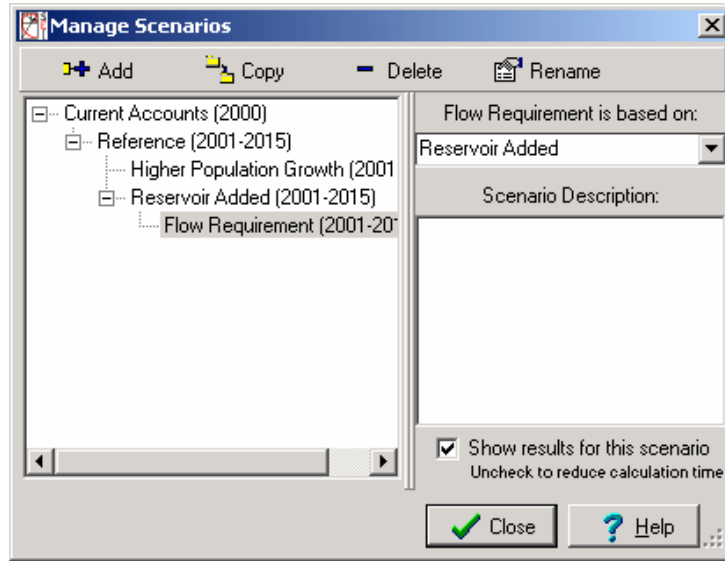


Now add a “Flow Requirement” to the Schematic view below the withdrawal node for the Big City, but upstream of the withdrawal node for Agriculture.

*Demand Priority*                      1 (default)

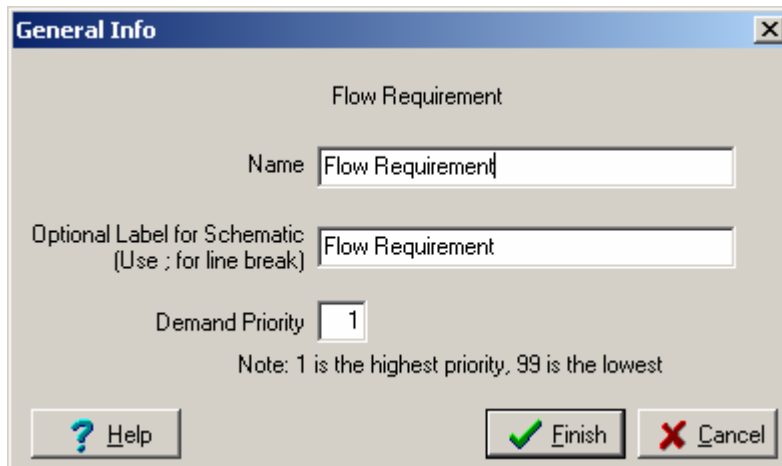

Right click on the Flow Requirement and select Edit Data \ Minimal Flow Requirement. Add the value below (make sure you still have the “Flow Requirement” scenario selected):

*Minimal Flow Requirement*                      5 CMS

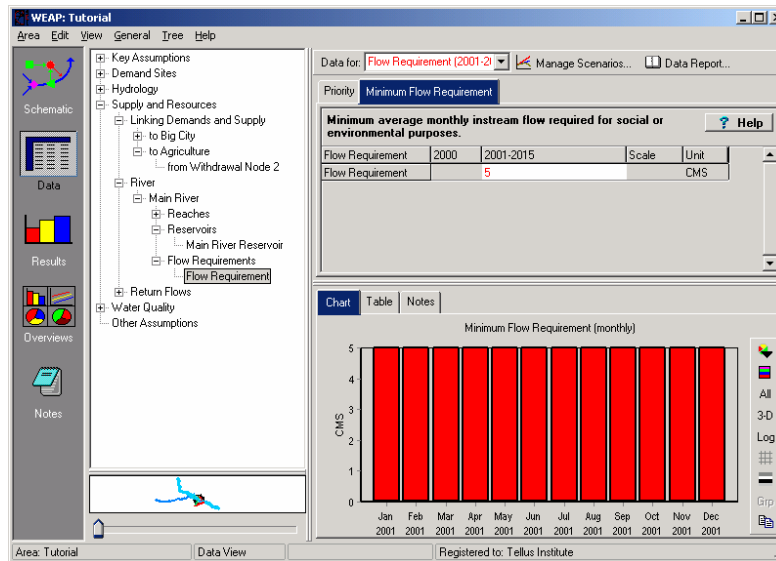


## 2. Run the Model and Evaluate the Results

Look at the results and think about the related questions.


- How does adding the flow requirement change streamflow in the reach below the flow requirement?

Compare streamflow below the flow requirement for the "Reference", "Reservoir Added", and "Flow Requirement Added" scenarios for the same year (2002). You should obtain a graph like the one below:

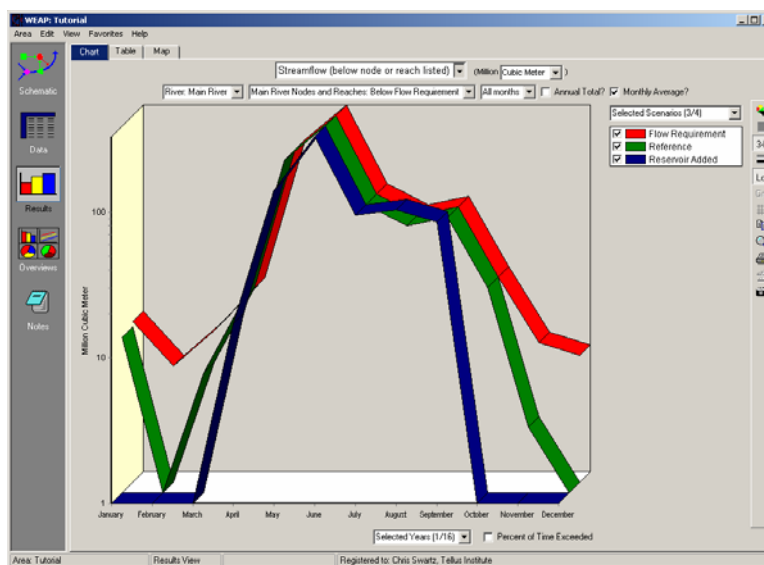


- What is the Flow Requirement coverage?

You can view these data by selecting "Instream Flow Requirement Coverage" under Demand. (Switch off the logarithmic display for the y axis, and select only the "Flow Requirement Added" scenario for viewing).

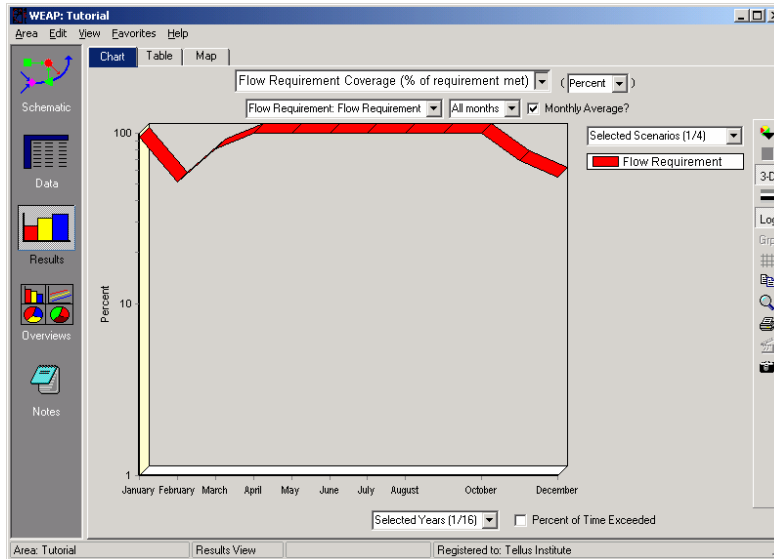

- Why has the coverage now changed for the Big City?

Select "Demand Coverage" from the primary variable pull-down menu, select the Big City demand site, and select the "Reference", "Reservoir Added", and "Flow Requirement Added" scenarios for viewing.

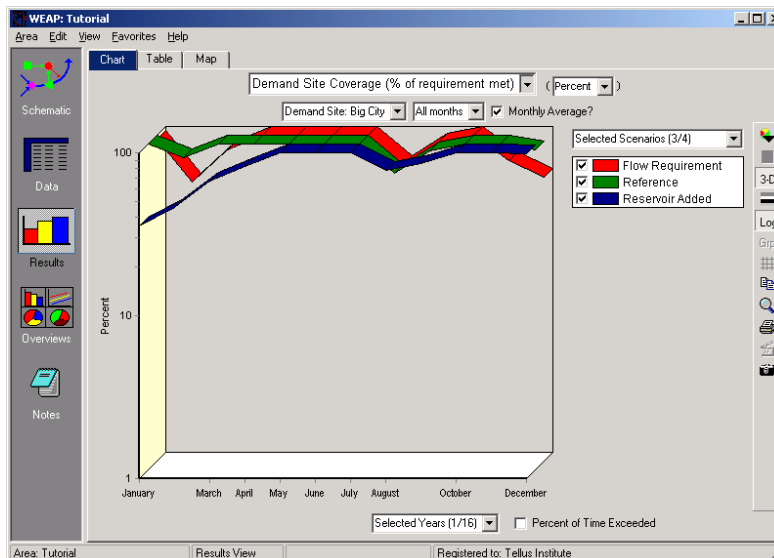



- Assuming this flow requirement was more important than supplying the Big City, how should the model be changed to ensure that the flow requirement is fulfilled?




The relative level of Demand Priority for Big City, Agriculture and the Flow Requirement will determine which demand is covered first. To ensure that the Flow Requirement is covered first, change the Demand Priority of Big City to a value higher than for the Flow Requirement, since it is upstream of the Flow Requirement.

## Modeling Groundwater Resources

### 1. Create a Groundwater Resource

Create a Groundwater node next to the City and name it "Big City Groundwater". Also, make it active in Current Accounts.

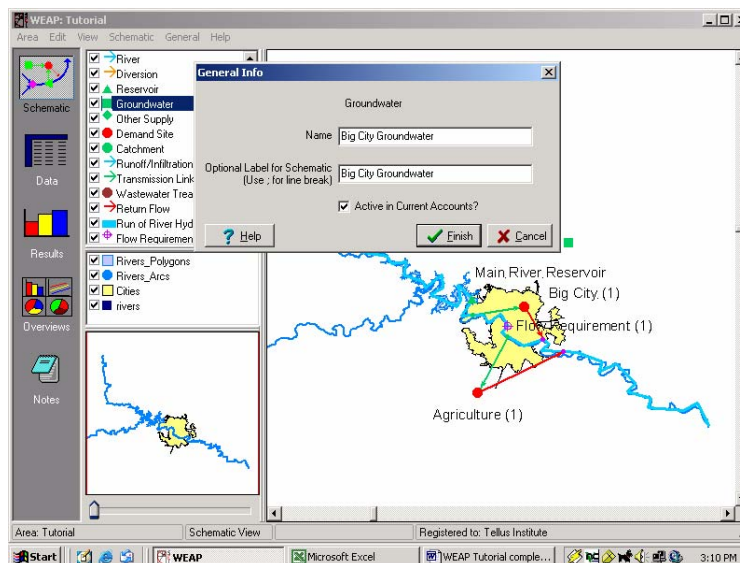

Give Big City Groundwater the following properties (make sure you are in Current Accounts when entering these data - you will realize you are not if there is no tab for Initial Storage):


*Storage Capacity*    *Unlimited (default, leave empty)*

*Initial Storage*    *100M m<sup>3</sup>*

*Natural Recharge (use the Monthly Time Series Window, accessed in the field under "2000")*

- *Nov. to Feb. 0M m<sup>3</sup>/month*


- *Mar. to Oct. 10M m<sup>3</sup>/month*

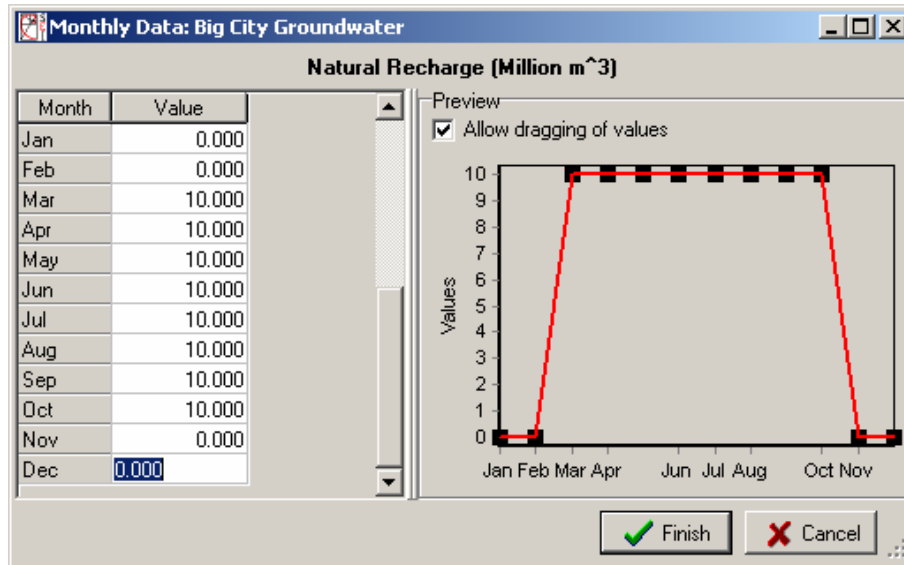

## 2. Connect Big City Groundwater with Big City

Use a Transmission Link to connect Big City Groundwater to the Big City demand site, and provide it with a *Supply Preference* of 2.


Your model should look similar to the figure below:

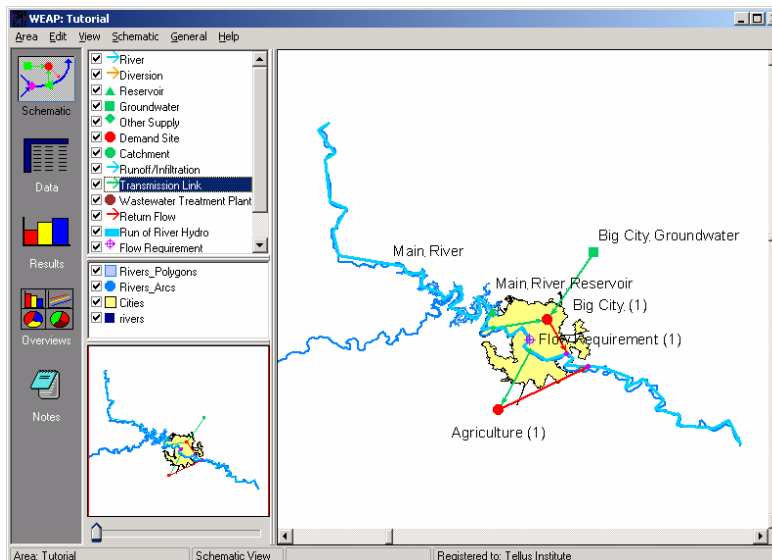

### 3. Update the characteristics of the Transmission Link between the Main River and Big City

Change the characteristics of the Transmission Link connecting the Main River (Withdrawal Node 1) and Big City (make sure you are in Current Accounts):

*Supply Preference*            1 (default)  
*Maximum Flow Volume*    6 m<sup>3</sup>/sec

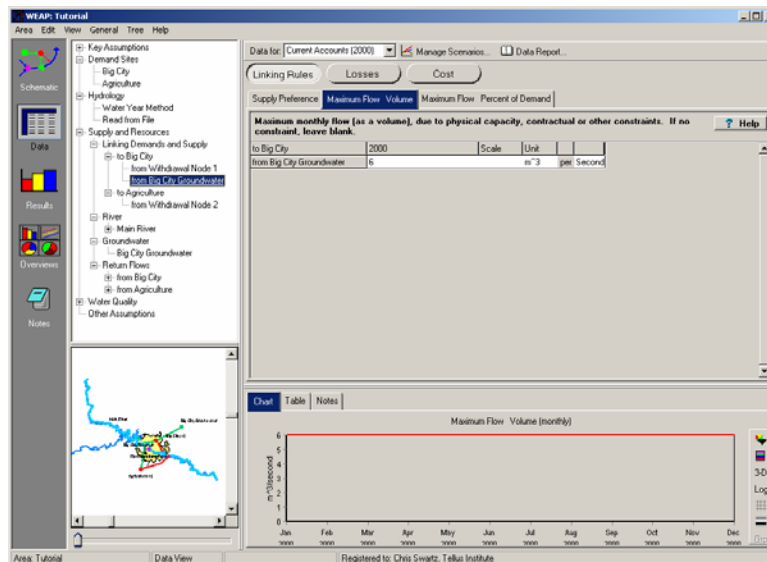


The Maximum Flow Volume or Percent of Demand parameter represents restrictions in the capacity of a resource (due, for example to equipment limits).

### 4. Run the Model and Evaluate the Results

Look at the following results and think about the related questions.


*- Is the groundwater extraction required to meet demands under these conditions sustainable?*

To view these results, select “Groundwater Storage” from the pull-down menu under “Supply and Resources\Groundwater”.

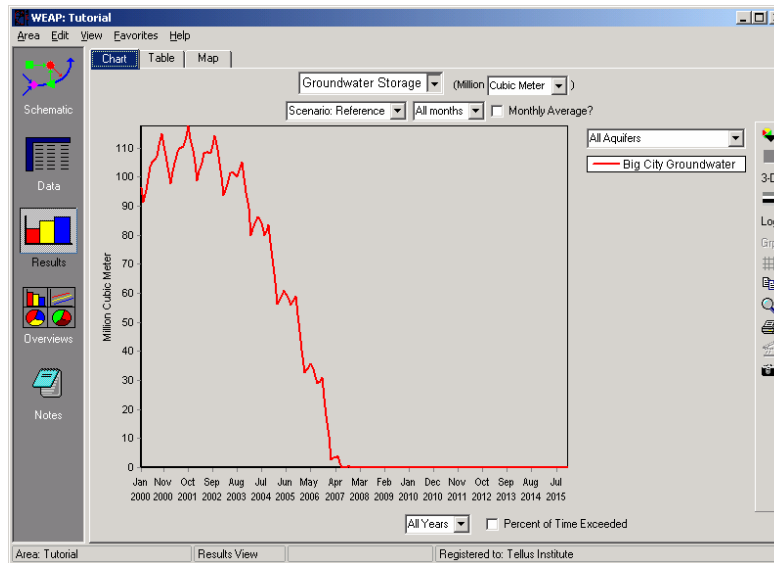

- How does the relative use of water from Big City Groundwater and the Main River evolve at the Big City demand site?

To view these graphical results for Big City specifically, first select "Supply Delivered" under Demand using the primary variable pull-down menu. Then choose "All Sources" in the pull-down menu on the right side of the window above the graph legend. Next, select Big City as the demand site to view using the pull-down menu centered above the graph and directly below primary variable field. Click on "Annual Total".

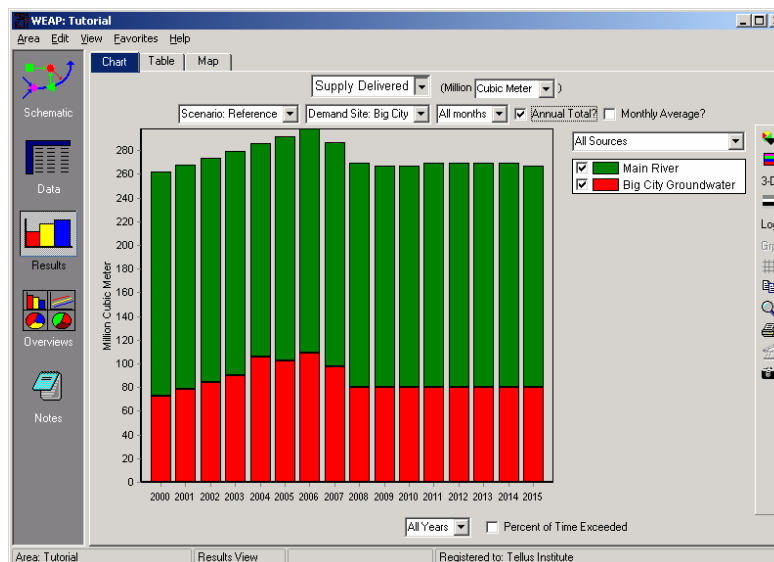



Groundwater recharge and interaction with rainfall and surface water can be modeled rather than entered as inputs. Refer to the “Hydrological Modeling” tutorial for more details.

Other resources can be modeled using the “Other Supply” object, which is characterized by a monthly “production” curve. This object can be used to simulate a desalination plant or inter-basin transfers, for example.

---



---

# WEAP

Water Evaluation And Planning System

# Data, Results and Formatting

## *A TUTORIAL ON*

<i>Exchanging Data</i> .....	112
<i>Importing Time Series</i> .....	115
<i>Working with Results</i> .....	118
<i>Formatting</i> .....	122

**November 2005**



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.seib.org/weap>

**Note:**


For this module you will need to have completed the previous modules (“WEAP in One Hour, Basic Tools, and Scenarios) or have a fair knowledge of WEAP (data structure, Key Assumptions, Expression Builder, creating scenarios). To begin this module, go to the Main Menu, select “Revert to Version” and choose the version named “Starting Point for all modules after ‘Scenarios’ module.”

## Exchanging Data


### 1. Export Data to Excel

Export the entire model to Excel by going to the Data view and selecting “Edit”, “Export to Excel”.

*Export all branches, and all variables of the “Current Accounts” only (don’t export any of the scenarios for this example) to a new workbook. Keep other options at default values.*

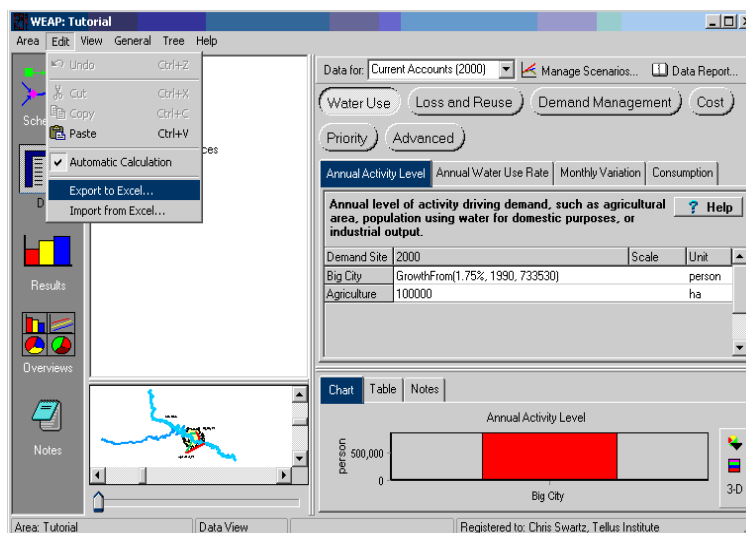



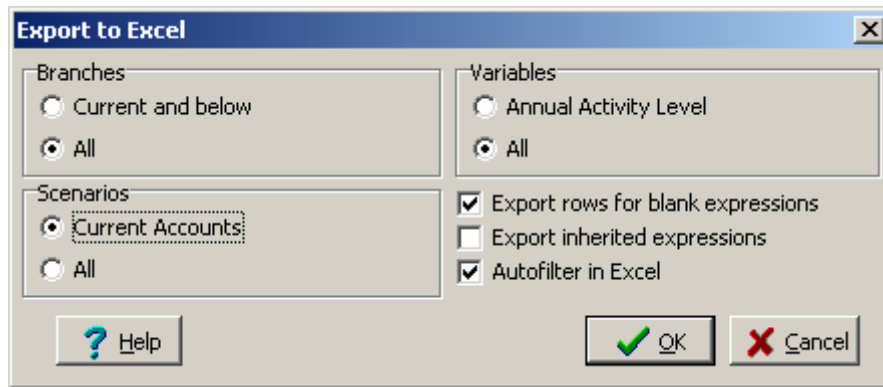


This instruction creates a new Excel workbook that contains all the variables that can be changed in the “Data” view, using the same structure as in the Data tree. In large models, you can choose to export only the current branch and/or variable.

## 2. Use Excel’s Auto Filtering Option

In the Excel Spreadsheet that was created in the previous steps, filter the content to display only the “Consumption” variable. You will probably have to scroll over to the right to see the column in the view.

*Use the arrow to the right of the “variable” header to select the “Consumption” variable in the drop-down list.*

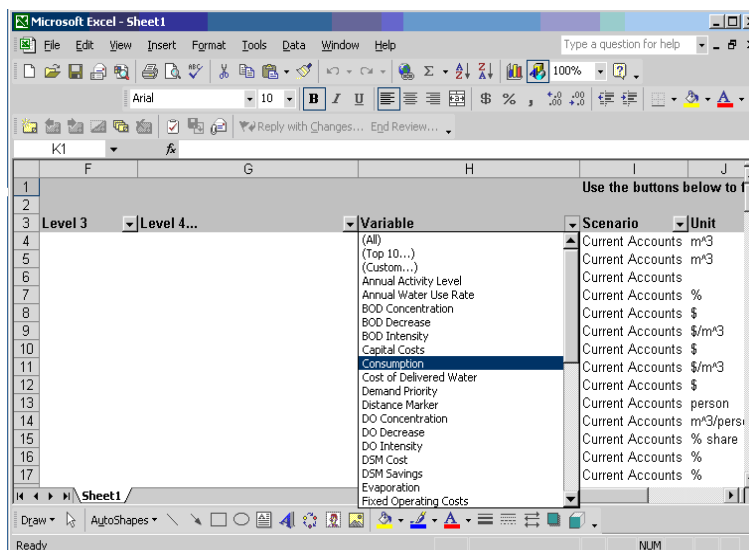




Auto-filtering does not change or erase the data; it only hides the rows that are not of interest. Multiple filters can be used.

### 3. Modify Data

In the Excel spreadsheet that was created in the previous steps, make the following changes in the yellow column (it may be good to hide a few of the columns so that you can see both the variable values and the Demand Sites to which they belong in the same view):

*Big City Consumption*     5% (*value was 15 originally*)

*Agriculture Consumption*     5% (*value was 90 originally*)

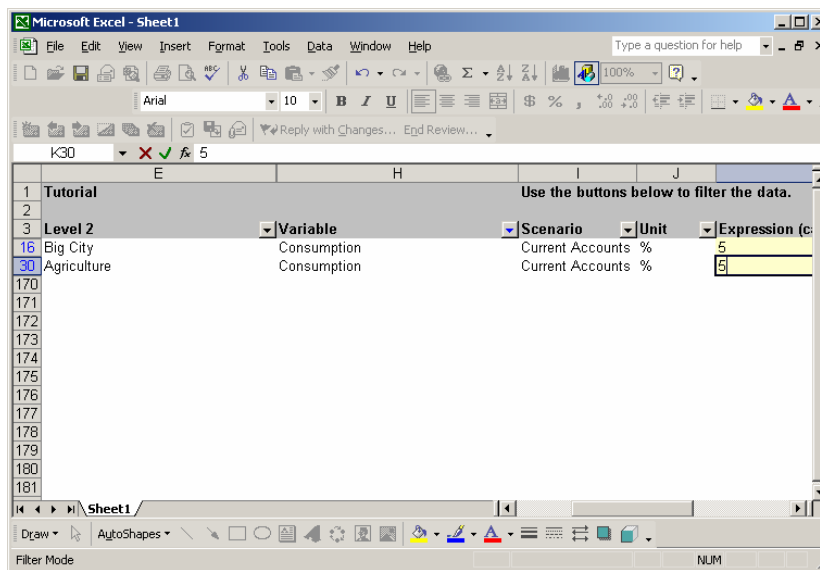

The values entered are not meant to be representative of realistic values, just examples.


When creating a large model, a quick way to enter a lot of data is to use the Excel Import and Export functions combined with the Excel lookup capabilities. This requires the user to have set up the model in a consistent way (data structure, names), however.

### 4. Import the Data from Excel

Re-import the modified data in Excel.

*In WEAP, choose "Edit", "Import from Excel..."*

*Check that the Consumption data have been changed in your model.*

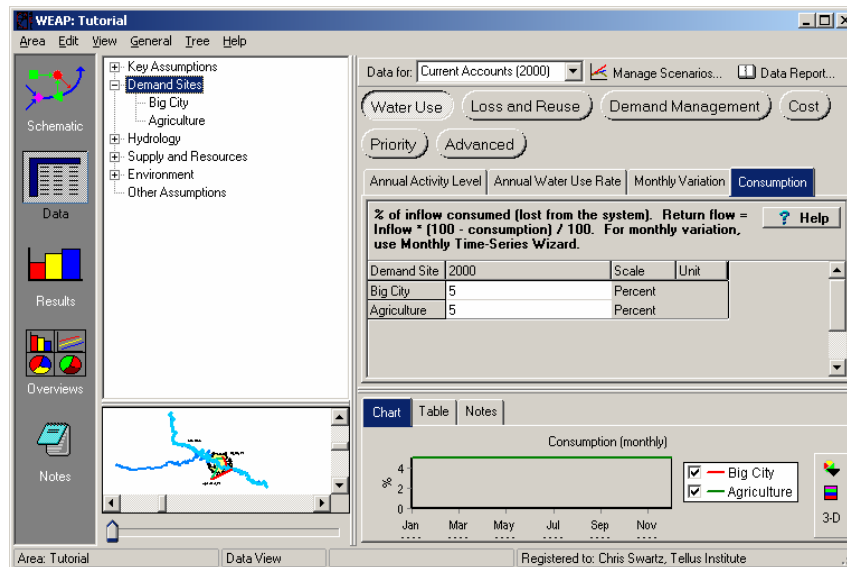

WEAP always reads from the Excel file that had the focus last. If you have several Excel files open, you should ensure that the appropriate Excel file is selected before beginning the importation into WEAP.


When re-importing into Excel, all rows are read, even those that are filtered out through the auto-filtering options.

## Importing Time Series

### 1. Create a Streamflow Gauge Object

Add a “Streamflow Gauge” object to the model.

*Insert the Streamflow Gauge downstream of the Big City, below the return flow nodes for Agriculture and Big City.*

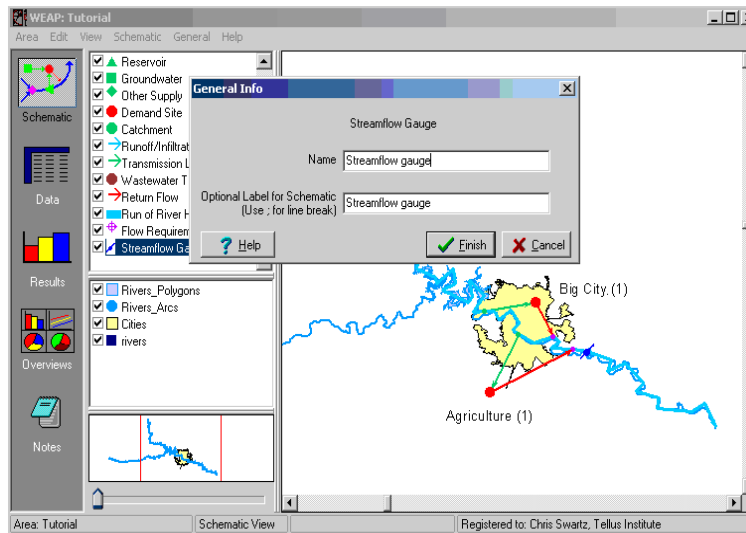


## 2. Import Text File Data

Import streamflow data from a comma-separated text file containing approximately 100 years of streamflow measurements up to 2003. To import the file, use the “ReadFromFile” function in the streamflow gauge’s data tab in the “Supply and Resources \ River \ Streamflow Gauges” branch of the Data tree.

*Type in the following function, which will read the file from a directory called “Additional Files” located in your area’s folder:*

*“ReadFromFile(Additional Files \ River\_Flow.csv)”*

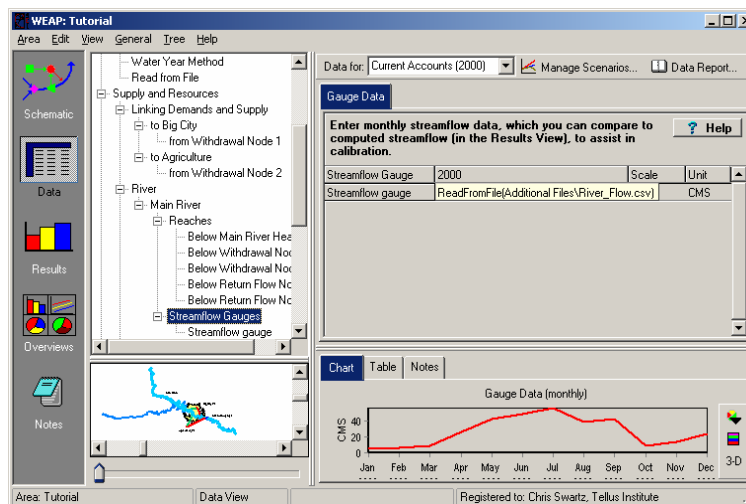

The ReadFromFile function can be used for any variable that requires a time series, monthly or yearly, such as headflow, groundwater recharge, etc.




WEAP will automatically locate the correct year and month and only use that data. If you change the years modeled, WEAP will automatically read the correct data.

More information about the syntax of this function and the format of the data file can be found in the “Read from File” help topic.


### 3. Compare the Actual and Modeled Streamflow

Recalculate the results and compare the historical streamflow data with the WEAP simulated streamflow. Do this by clicking on the “Chart” tab of the Results view and selecting from the primary variable pull-down menu: Supply and Resources\River\Streamflow Relative to Gauge (Absolute).

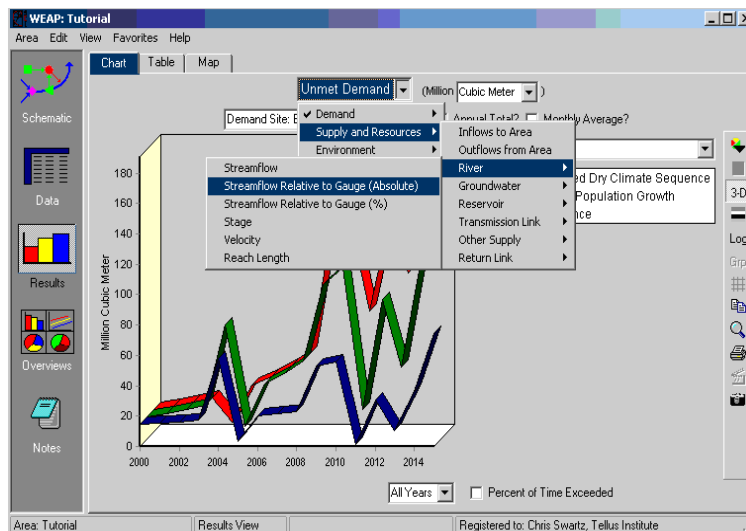

WEAP will compare the observed flow at the streamflow gauge to the nearest upstream node. In the case for this example, that node is Return Flow 2 (the Return Flow for Agriculture). Comparing observed and simulated streamflow is one means for the user to assess if the model is representing the system accurately.

Choose the “Selected Years” option from the pull-down menu above the chart legend and select only the years 2000, 2001, 2002, and 2003 (the Current Accounts is 2000, and the data file contains no streamgauge data beyond 2003). The Reference scenario will automatically be displayed when you choose the “Selected Years” option. You should obtain the graph below:

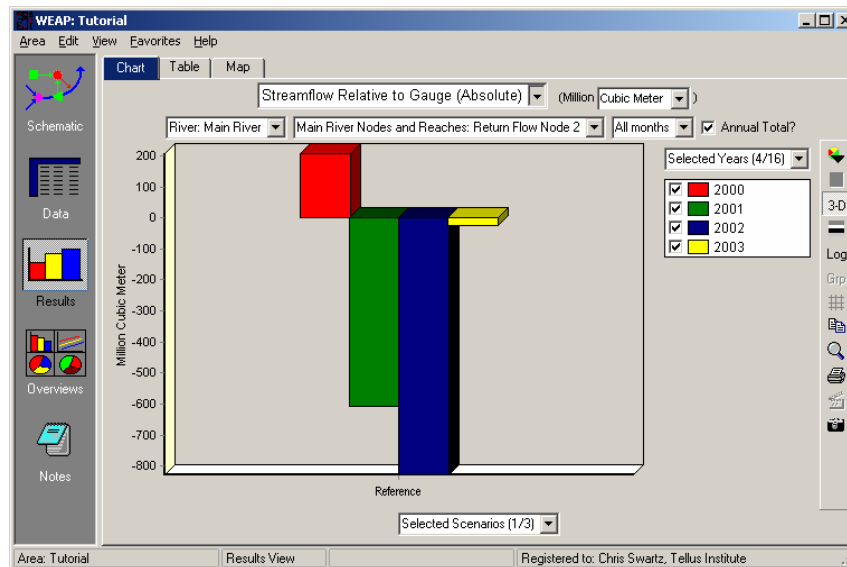


Notice that the simulated streamflow is greater than the observed streamflow in the Current Accounts year (2000) but is less than observed in subsequent years.

## Working with Results

### 1. Create a Favorite Graph

Create a graph of streamflow that shows both the actual flow as recorded at the streamgauge and the simulated streamflow at the appropriate node upstream of the streamgauge (in this example, Return Flow Node 2). First, select "Streamflow" from the primary variable pull-down menu. Then select "Streamgauge" and "Below Return Flow Node 2" from the list that appears when you choose "Select Nodes and Reaches" from the drop-down menu of the Supply and Resources \ River \ Streamflow chart above the graph legend (see below). Finally, select the years 2000, 2001, 2002, and 2003 to be represented in the graph using the pull-down menu at the bottom of the window.

Save this graph as a favorite by using the "Favorite", "Save Chart as Favorite" option. Name the file "Simulated and Observed Streamflow Comparison".

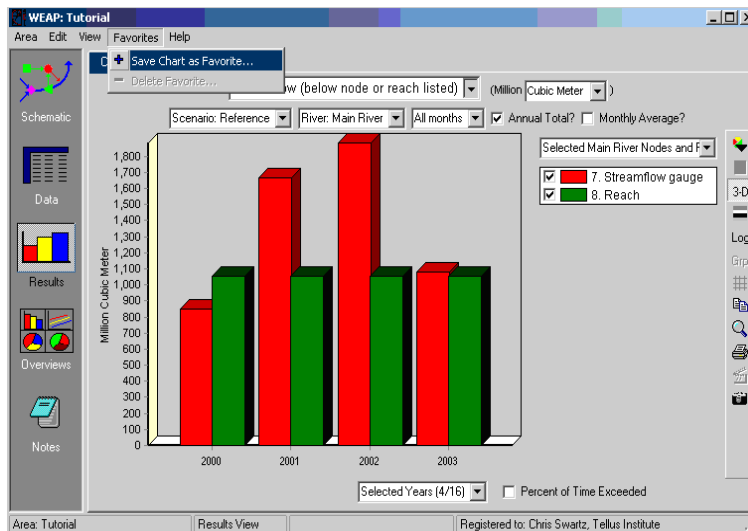

From this point forward, the chart will appear in the list of favorite charts of the Results view.




You can also export the data to Excel or to the clipboard, change the format and the display of figures and charts, calculate statistics, group series with the smallest values, etc. from the toolbar located at the right of the “Results” view.

## 2. Create an Overview

Create an “Overview” displaying the streamflow, inflow, and outflow to area charts.

*Select the “Overview” view. Under “Manage Overviews”, select “Inflows to Area”, “Outflows to Area” and the Favorite graph created in the previous step.*

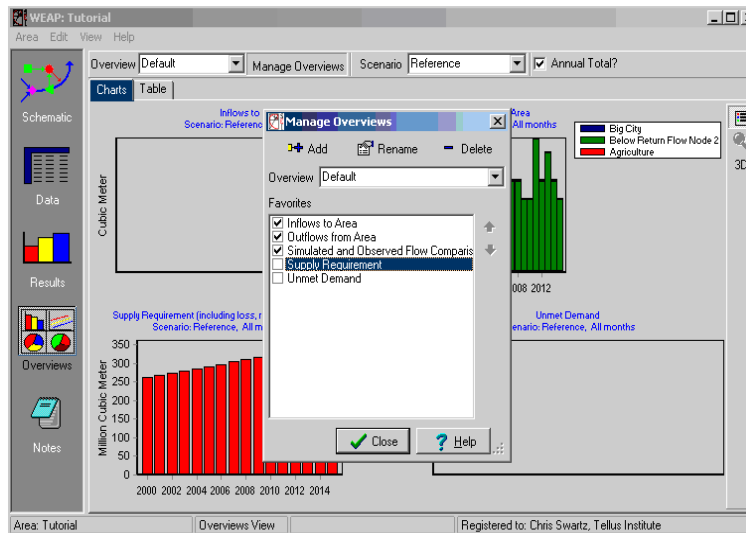


Overviews can be created from any combination of favorites, but the charts need to be created in the “Results” view prior to their integration in an overview. The data underlying overviews can also be displayed in tabular format (select the “Table” tab) and exported to Excel.

### 3. Use the Dynamic Map

Dynamic Results Maps are a quick way to obtain an overview of the results in their temporal context. In the “Results” view, select the “Map” tab and play with the time slider at the bottom of the display to see how the displayed parameters change.

*Try this by selecting the Main River's streamflow.*

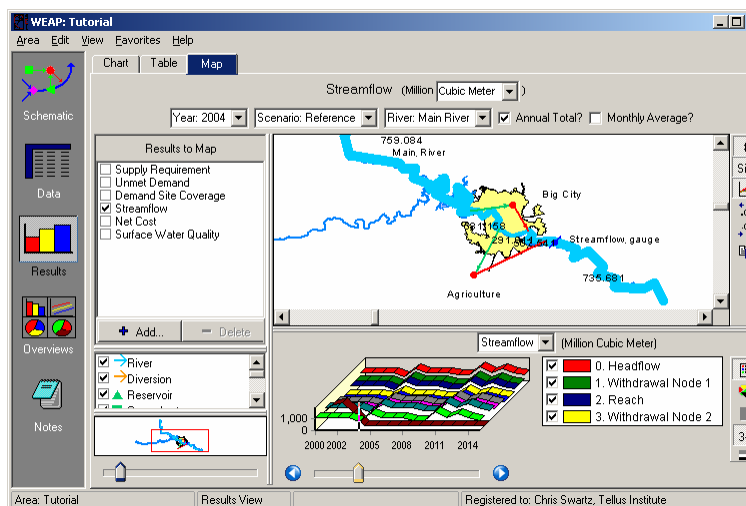


Note that as you pull the slider across the bar, an indicator appears in the graph above the bar to indicate the data selected (for this example, the year



2004 annual total is selected). In the smaller schematic view at the top of the window, the width of the river will increase and decrease with the changing data, and numerical values appear for each of the reaches.


## 4. Export Results to Excel

All results can be readily exported to Excel from the "Results" view. A new workbook is created that contains the results in table format, with the same structure as in WEAP.

*Recall the favorite graph you have created a few steps before by selecting it in the "Favorite" menu of the Results View. Export the related data to Excel by switching to the "Table" tab and hitting the "Export Table to Excel" button (  ) to the right of the screen.*

## 5. Calculate Statistics

You can generate statistics in the Results view for any table. Just click on the Table tab and then click on the "Stat" icon on the right vertical menu bar.

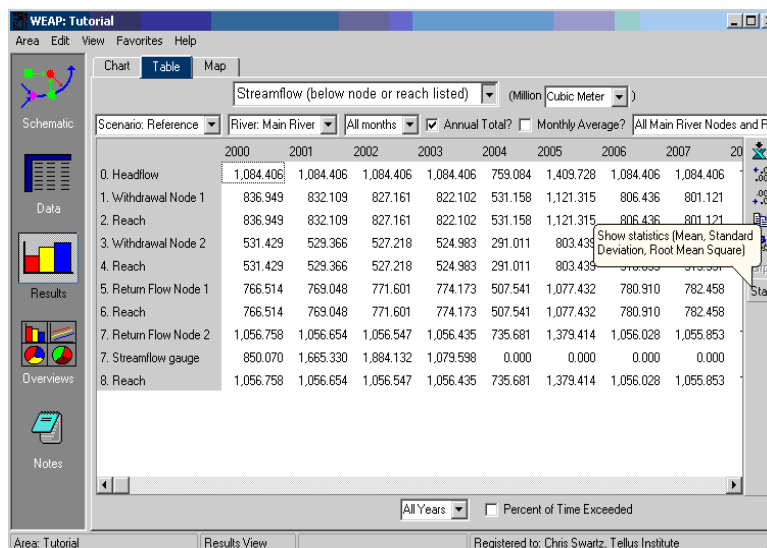

The screenshot shows the WEAP: Tutorial interface with the 'Table' tab selected. The table displays streamflow data for various nodes and reaches from 2000 to 2007. The 'Stat' icon is visible on the right vertical menu bar.



	2000	2001	2002	2003	2004	2005	2006	2007	2008
0. Headflow	1,084.406	1,084.406	1,084.406	1,084.406	753.084	1,409.728	1,084.406	1,084.406	
1. Withdrawal Node 1	836.949	832.109	827.161	822.102	531.158	1,121.315	806.436	801.121	
2. Reach	836.949	832.109	827.161	822.102	531.158	1,121.315	806.436	801.121	
3. Withdrawal Node 2	531.429	529.366	527.218	524.983	291.011	803.435			
4. Reach	531.429	529.366	527.218	524.983	291.011	803.435			
5. Return Flow Node 1	766.514	769.048	771.601	774.173	507.541	1,077.432	780.910	782.458	
6. Reach	766.514	769.048	771.601	774.173	507.541	1,077.432	780.910	782.458	
7. Return Flow Node 2	1,056.758	1,056.654	1,056.547	1,056.435	735.681	1,379.414	1,056.028	1,055.853	
7. Streamflow gauge	850.070	1,665.330	1,984.132	1,079.598	0.000	0.000	0.000	0.000	
8. Reach	1,056.758	1,056.654	1,056.547	1,056.435	735.681	1,379.414	1,056.028	1,055.853	


# Formatting

## 1. Change the Appearance of a Background Vector Layer


In the Schematic View, change the color of the Big City by right-clicking the “Cities” layer in the box below the Element Selection box (see example below), and selecting “Edit”. Click on the Appearances tab, then click on the “Fill Color” field. A color palette will appear.

*Change the Background color to orange.*

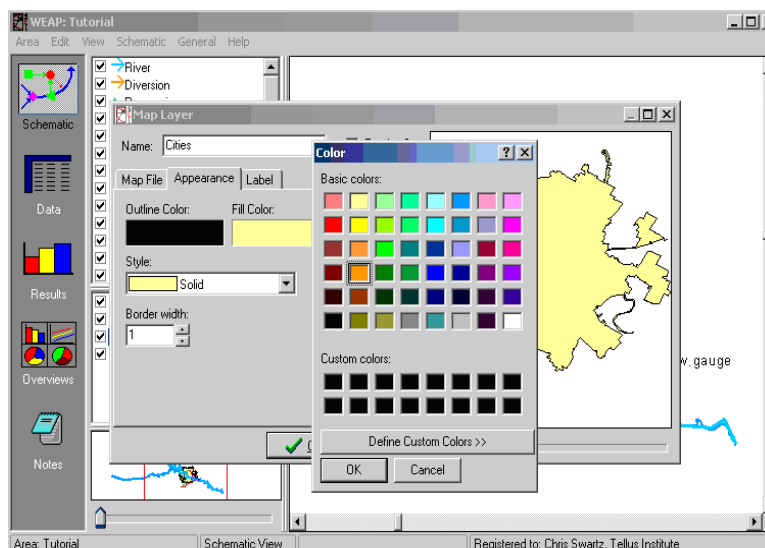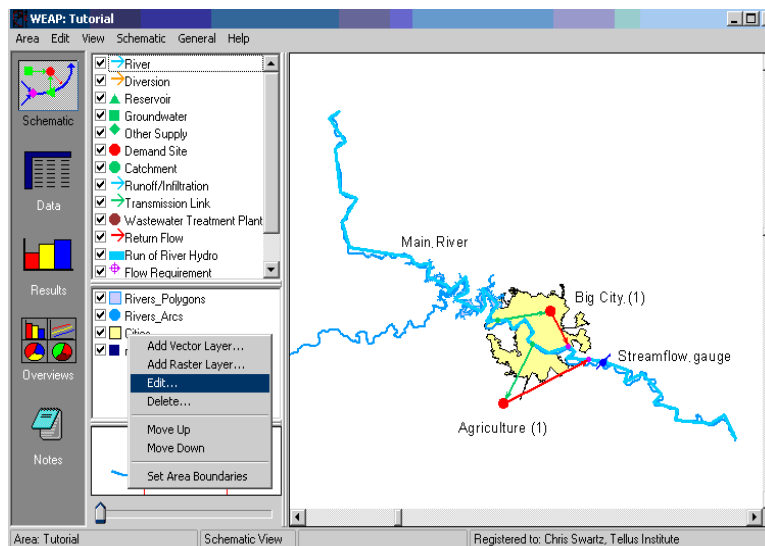

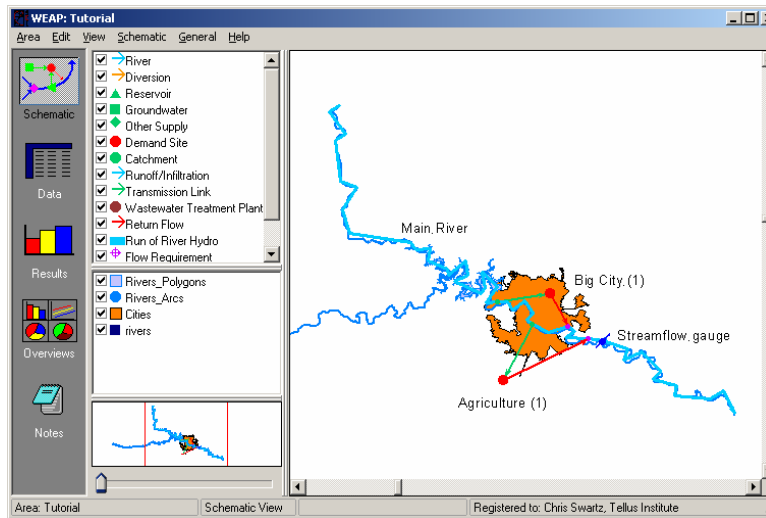

You can also move various layers up or down relative to each other in the schematic. Do this by right clicking on a layer and selecting "Move Up" or "Move Down".

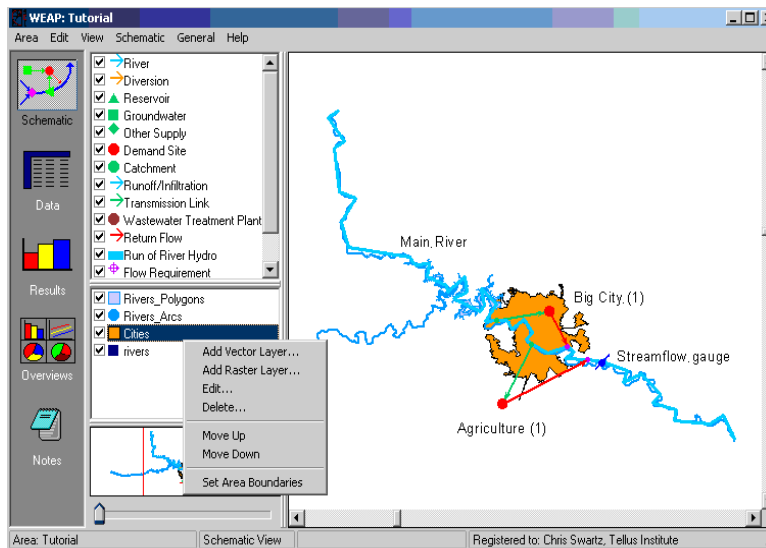


Background vector data can be added by clicking “Add Vector Layer”. WEAP reads vector information in the SHAPEFILE format. This format can be created by most GIS software.



A large amount of georeferenced data (both in vector and raster format) is available on the Internet, sometimes for free; websites such as [www.geographynetwork.com](http://www.geographynetwork.com) or [www.terraserver.com](http://www.terraserver.com) provide good starting points for a search. Beware that some of the downloadable data might need GIS processing before being usable in WEAP, especially to adapt the projection and/or coordinate system.

## 2. Label a Vector Layer

You can edit the labels for the layers - right click on the “Rivers Polygons” layer, select “Edit” and choosing the “Label” tab. You can also change the size of the labels in this tab by going to the Size field at the bottom of the window.


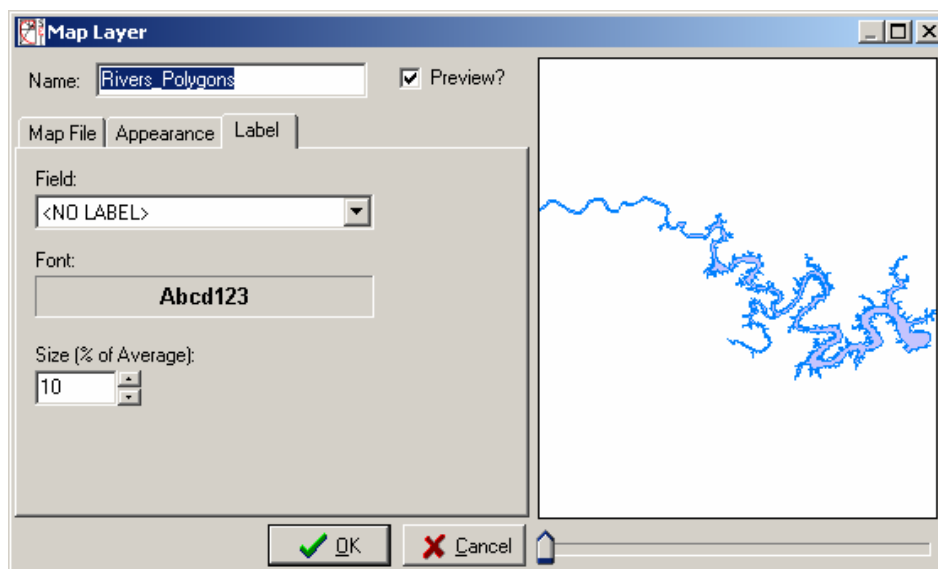



You can also hide layers in the Schematic view by clicking in the small box to the left of the layer name (this makes the check mark disappear also).

## 3. Add a Raster Layer


In the Schematic view, add a background map of the Big City region by right-clicking in the Layer window (see example below) and selecting “Add Raster Layer”

*Select the file “Map.jpg” located in the “\_Maps\Tutorial” subdirectory of the WEAP directory (e.g., C:\Program Files\WEAP21\\_Maps\Tutorial). Also enter a descriptive name to appear in the Layer window.*

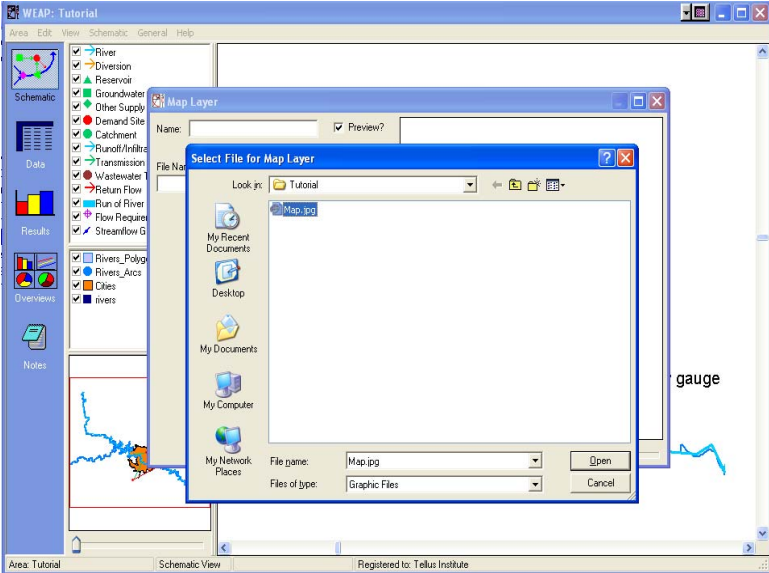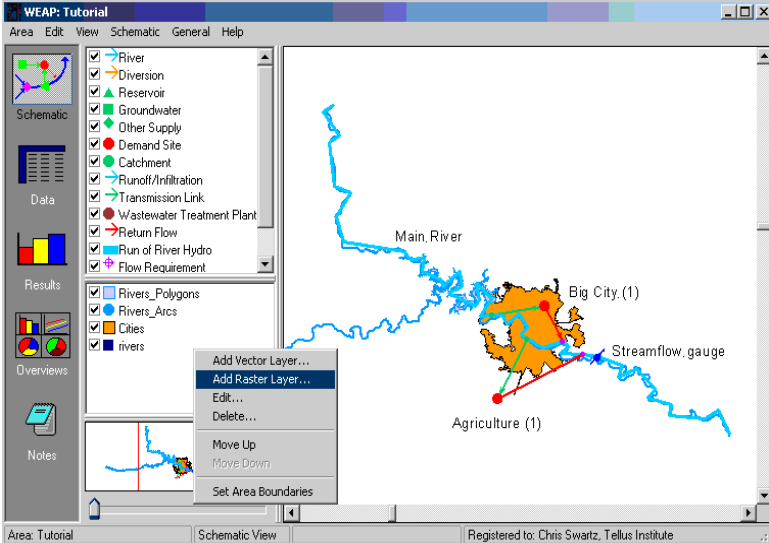

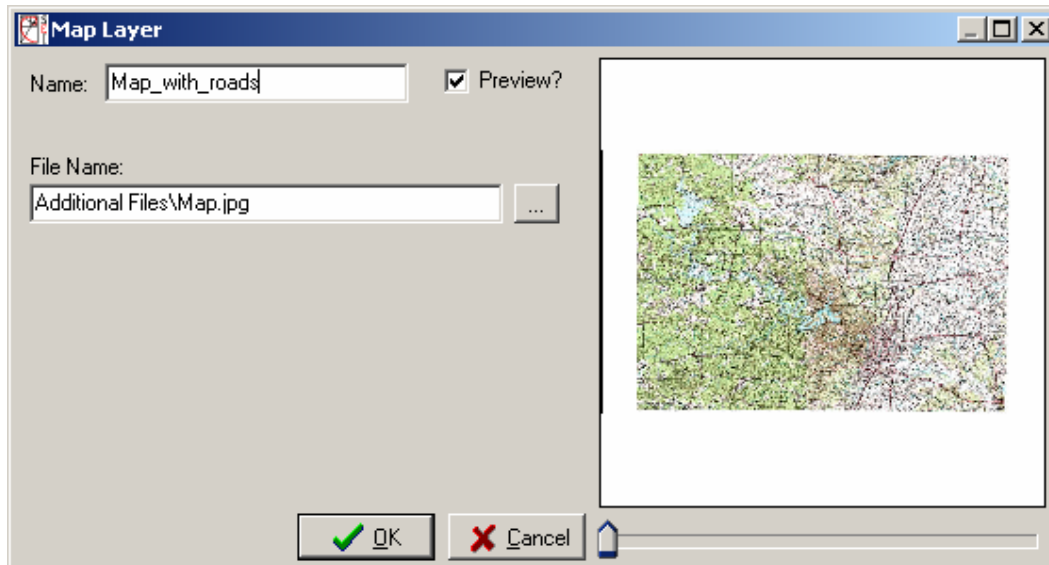

*Your model should now look similar to the figure below:*

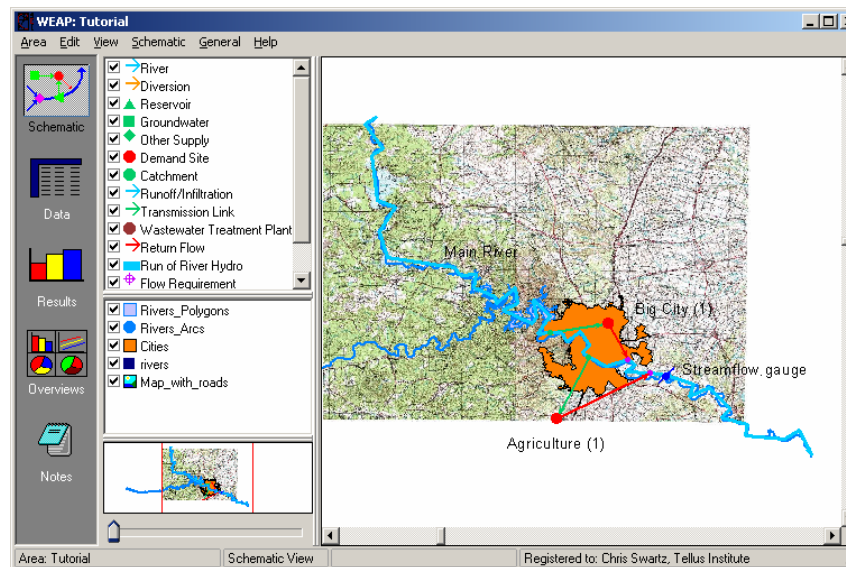



WEAP uses a “world file” to correctly position your raster file. Those files define the coordinate of one of the corners of the raster and the cell size. They can be created by many standard GIS programs such as ArcView or AutoCAD MAP.

The world file must have the same name as the raster file with a “w” added to its extension and be in the same directory. For example, the world file for the above file is called “map.jgw”.


## 4. Move around Labels

Complete the formatting of your area by changing the node and label font size and moving around labels.

*Under the Schematic pull-down menu, the “Set WEAP Node Size” and “Set WEAP Node Label Size” menu options can be used to change the size of symbols and labels. For each of these actions, a window with a slider will appear for increasing and decreasing the size of these elements.*

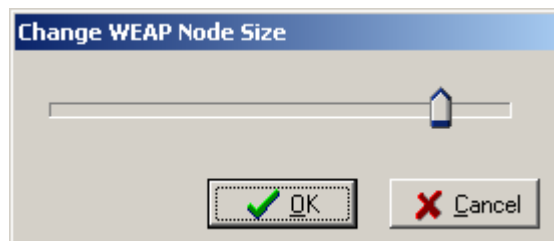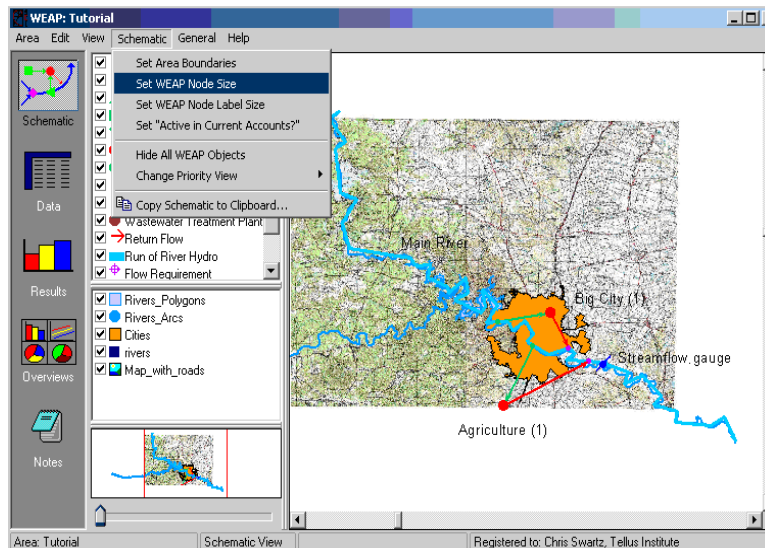

Right-Click on any object and select “Move Label” to move its label.

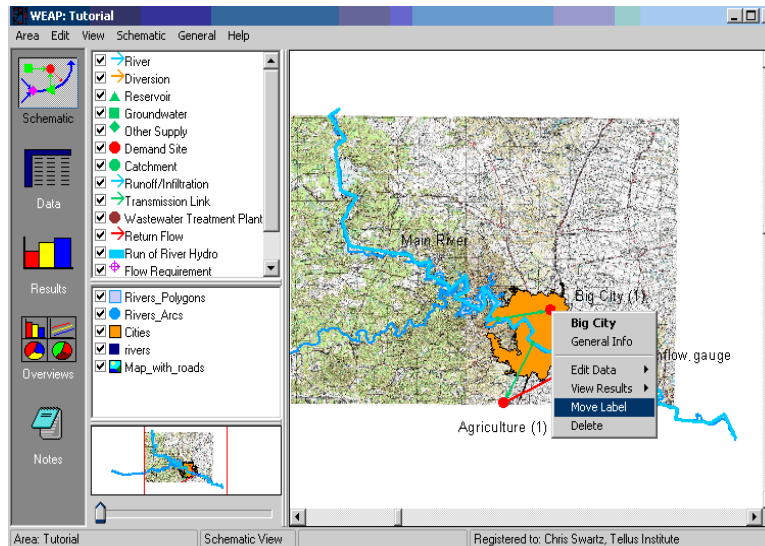

If you don't want a label to appear for a given object, just right-click that object, select “General Info” and delete the optional label text.



You can copy your map to the clipboard for later use in reports and presentations by selecting “Copy Schematic to Clipboard...” in the “Schematic” menu. The file size indicated in the dialog box corresponds to an uncompressed format. It is usually safe to go with the default level of detail.



---

**WEAP**

**Water Evaluation And Planning System**

# **Reservoirs and Power Production**

***A TUTORIAL ON***

*Modeling Reservoirs* ..... 130

*Adding Hydropower Computation*..... 134

*Modeling Run-of-River Power Plants*..... 137

**November 2005**



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.seib.org/weap>

**Note:**

For this module you will need to have completed the previous modules (“WEAP in One Hour, Basic Tools, and Scenarios) or have a fair knowledge of WEAP (data structure, Key Assumptions, Expression Builder, creating scenarios). To begin this module, go to the Main Menu, select “Revert to Version” and choose the version named “Starting Point for all modules after ‘Scenarios’ module.”

## Modeling Reservoirs

### 1. Create a Reservoir

Create a Reservoir on the Lake located upstream of the Big City. Name it “Big City Reservoir”.

*Demand Priority* 99 (*default*)





Entering a Demand Priority of 99 ensures that the reservoir will only fill if all other needs are fulfilled, including downstream demand.

---

### 2. Enter the Physical Data

Right click on Big City Reservoir to edit data. Enter the following data in the “Physical” window (make sure you are in Current Accounts).

<i>Storage Capacity</i>	<i>70 M m<sup>3</sup></i>
<i>Initial Storage</i>	<i>25 M m<sup>3</sup></i>
<i>Volume Elevation Curve</i>	
<u><i>Volume</i></u>	<u><i>Elevation</i></u>
<i>M m<sup>3</sup></i>	<i>m</i>
<i>0.0</i>	<i>190</i>
<i>30.0</i>	<i>210</i>
<i>70.0</i>	<i>216</i>
<i>Net Evaporation</i>	<i>25 mm/month.</i>

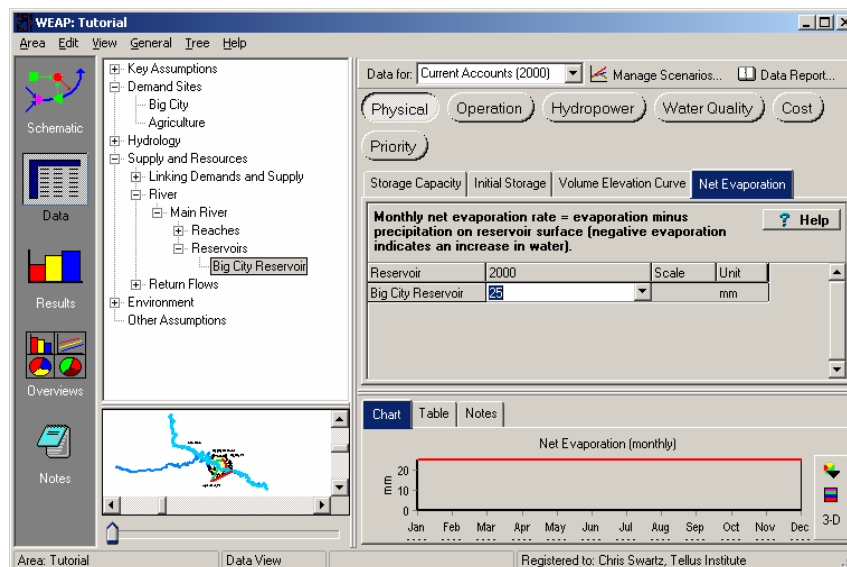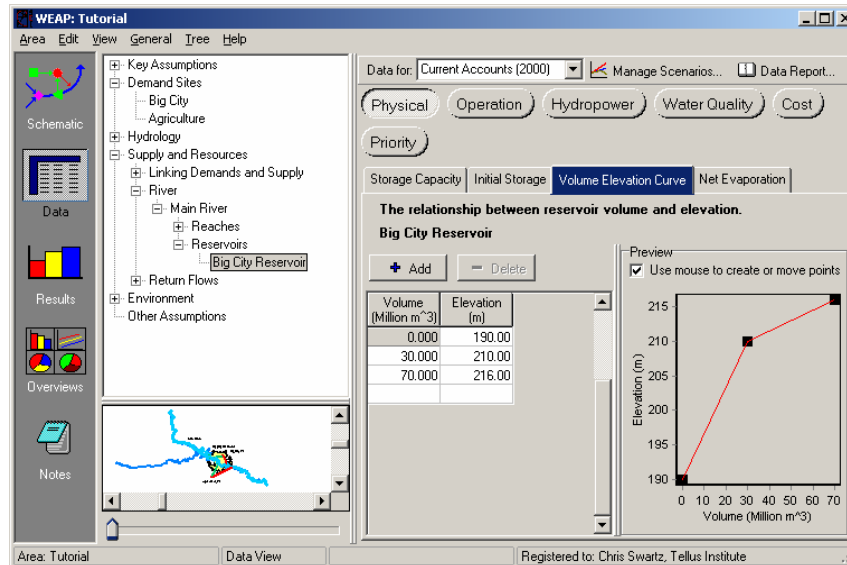



The “Volume Elevation Curve” is used both to model the surface for evaporation and to compute the head in case hydropower production is simulated. A cylindrical shape is assumed in converting volume and elevation into area.

Net evaporation needs to account for both rainfall and evaporation. It can therefore be a positive or a negative number; monthly variations can be modeled using the “Monthly Time Series Wizard”.

### 3. Enter the Operation Data

In the same view, enter the following data in the “Operation” window.

<i>Top of Conservation</i>	60
<i>Top of Buffer</i>	40
<i>Top of Inactive</i>	5
<i>Buffer Coefficient</i>	1.0

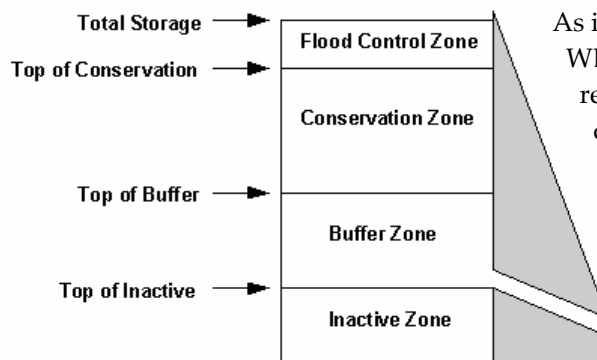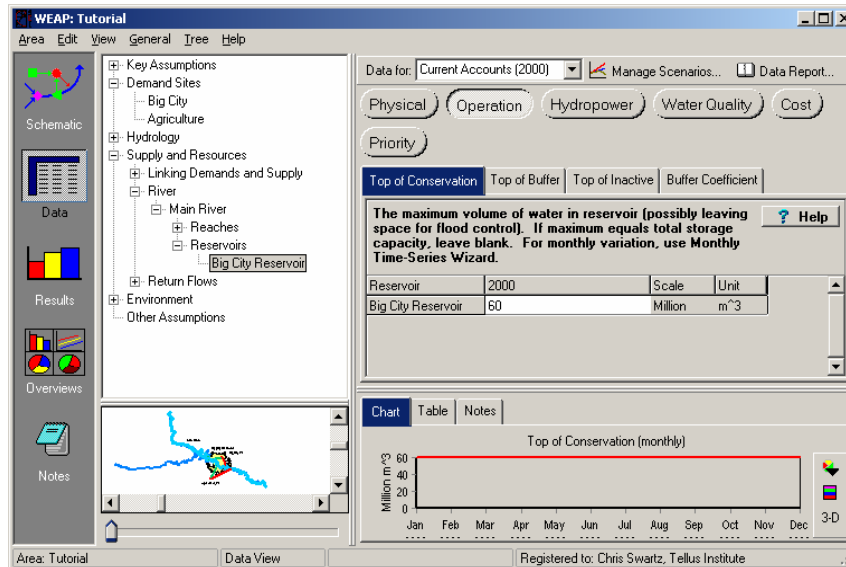


As illustrated by the figure to the left, WEAP allows the modeling of advanced reservoir operation through the definition of several zones that have different operational constraints.

More can be learned through the Help file’s “Reservoir Zones and Operation” screen or by clicking on the help button when in the Reservoir’s Operation tab.


### 4. Understanding the Impact of the Buffer Coefficient

Now create a new scenario inherited from the “Reference” scenario. Name this scenario “Buffer Coefficient Changes”. Then go back to the Data view (make sure that you are in the new scenario you just created) and change the buffer coefficient to 0.1. Click on results to run the new model.

Compare, for the “Reference” and “Buffer Coefficient Changes” scenarios, the results for “Reservoir Storage Volume”, found under the “Supply and Resources \ Reservoirs” branch of the primary variable pull-down menu. Select “All Years” from the pull-down menu at the bottom of the graph, and click on “Monthly Average” at the top of the graph. Choose the “Reference” scenario and “Buffer Coefficient Changes” scenario for viewing from the pull-down menu above the legend. You can choose “Big City Reservoir” from the pull-down menu directly above the graph.

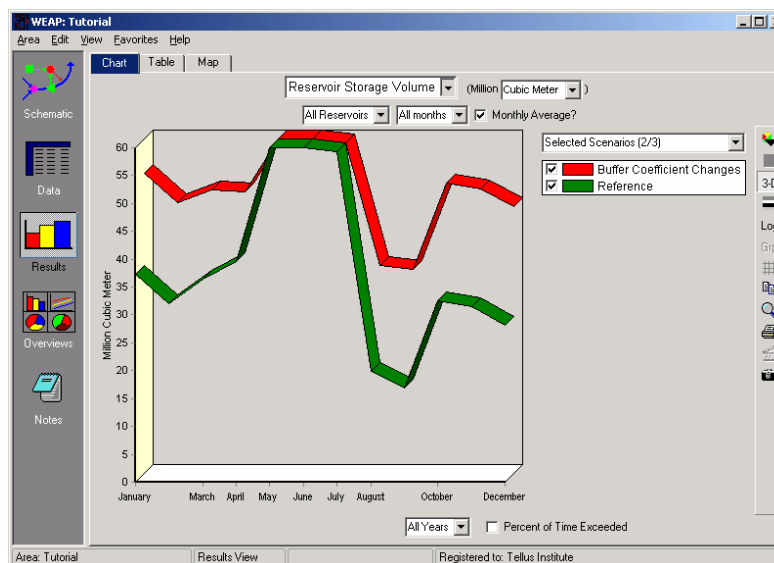

Also compare results also for Demand Coverage (under the Demand branch). Select the “Reference” and “Buffer Coefficient Changes” scenarios from the pull-down menu above the graph legend. Select “Big City” as the demand site for viewing from the remaining pull-down menu directly above the graph.

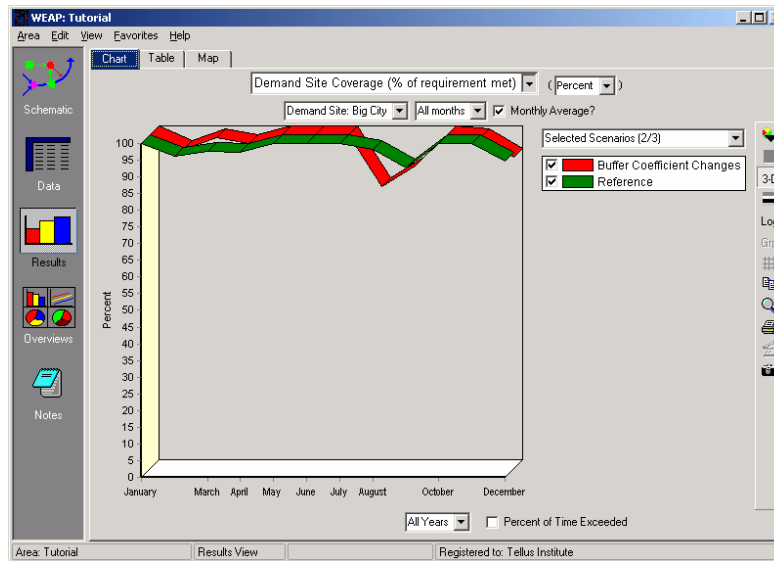

The Buffer Coefficient provides a way to regulate water releases when the water level in the reservoir is within the buffer zone (see figure in the information box of the previous step). The downstream demand is multiplied by the Buffer Coefficient to obtain actual water release. Thus a Buffer Coefficient of 1 means that as much water is released as is needed to cover downstream demand (in other terms, the buffer zone is a mere extension of the conservation zone). A Buffer Coefficient of 0 means no water is released. This is why lower Demand Site Coverage is observed for results in the “Buffer Coefficient Changes” scenario above.

## Adding Hydropower Computation

### 1. Understanding the way WEAP models Power Production


WEAP can model Power Production in three different ways: through on-line reservoirs, through off-line reservoirs, and through run-of-river hydropower plants.

*Refer to the help for more information on each category.*

## 2. Add Power Production Capabilities to Big City Reservoir

In this example we will model an on-line reservoir power plant. Enter the following data under the “Hydropower” window for Big City Reservoir in the Current Accounts.

<i>Min Turbine Flow</i>	5 CMS
<i>Max Turbine Flow</i>	80 CMS
<i>Tailwater Elevation</i>	195m
<i>Plant Factor</i>	100%
<i>Generating Efficiency</i>	60%

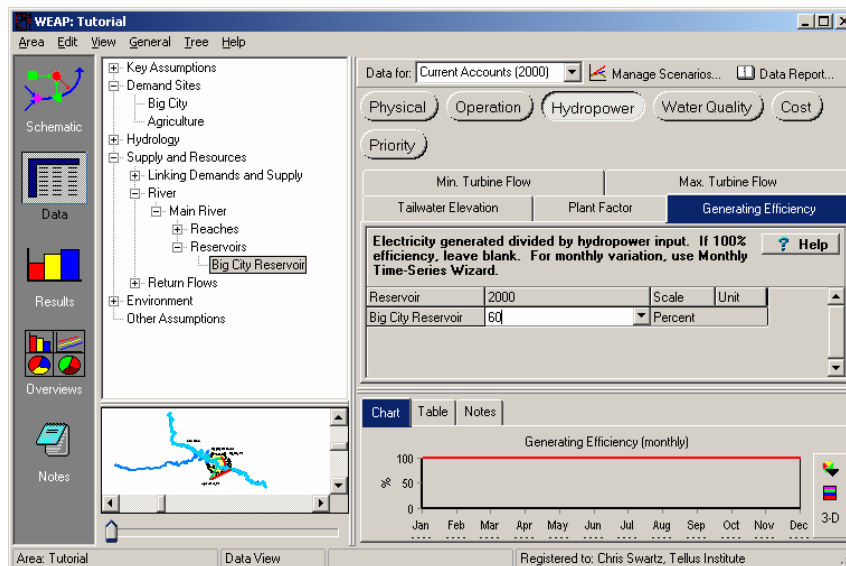


Look at the “Hydropower Calculations” help topic for more information about how WEAP computes power production.


## 3. Compute Hydropower Production and Understand the Results

Run the model and look at the results in the Reference scenario for power production for the year 2000.

*The results can be accessed under the Primary Variable pull-down menu under “Supply and Resources/Reservoir/Hydropower”.*

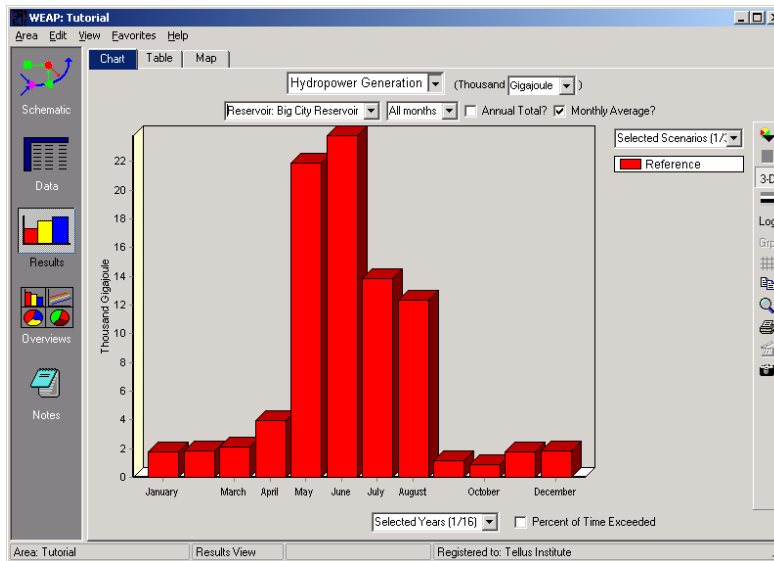

*Do you understand why production levels between May and June are so similar, even though flow in Main River and downstream water release is much greater in June? To confirm this, look at the results for “Streamflow” in the reach above Big City Reservoir (Main River Headflow).*

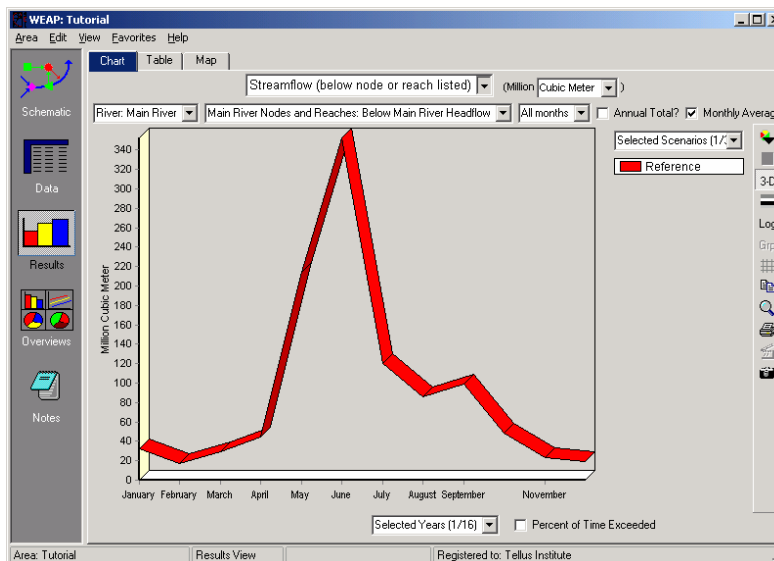






The streamflow that can be processed by the turbine has been capped to 80CMS (see previous step), meaning that even though there is a higher discharge in June, the excess quantity flows downstream without going through the turbine. Hydropower in June would be the same for May and June if not for the fact that the Storage Elevation in Big City Reservoir was slightly lower at the end of April than it was at the end of May (look at the Storage Elevation results to confirm this - these numbers represent the status at the *end* of each month indicated). This effect was slightly offset by the fact that May has 31 days to produce power, whereas June has 30 days, but June still ended up having slightly higher total production.

Off-line, “local” reservoirs’ hydropower production can be modeled in the same way.

## Modeling Run-of-River Power Plants

### 1. Create a Run-of-River Hydro Object


Create a Run-of-River Hydro Object on the Main River upstream of the Big City Reservoir created in the previous exercise. Name it “Big City Run of River”.

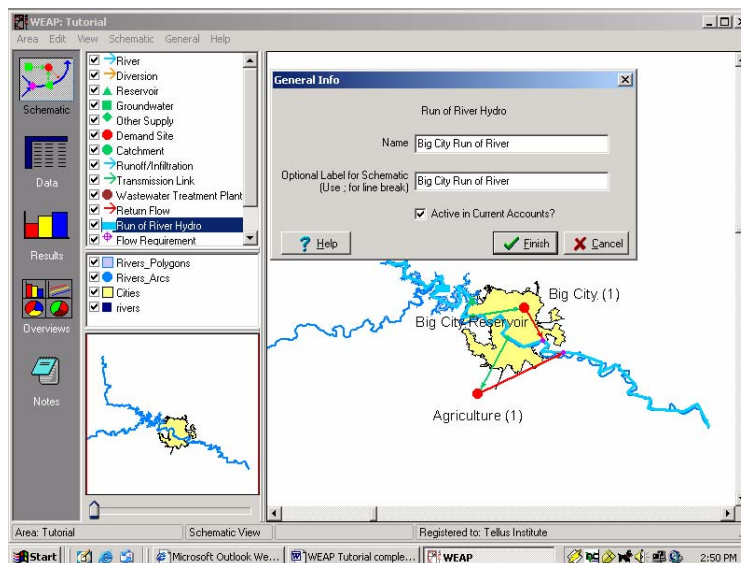

Enter the following data in the “Supply and Resources\ River\ Run of River Hydro” branch of the Data tree in the Data View:

<i>Min Turbine Flow</i>	<i>5 CMS</i>
<i>Max Turbine Flow</i>	<i>80 CMS</i>
<i>Plant Factor</i>	<i>100%</i>


*Generating Efficiency*      60%  
*Fixed Head*                      19.5 m

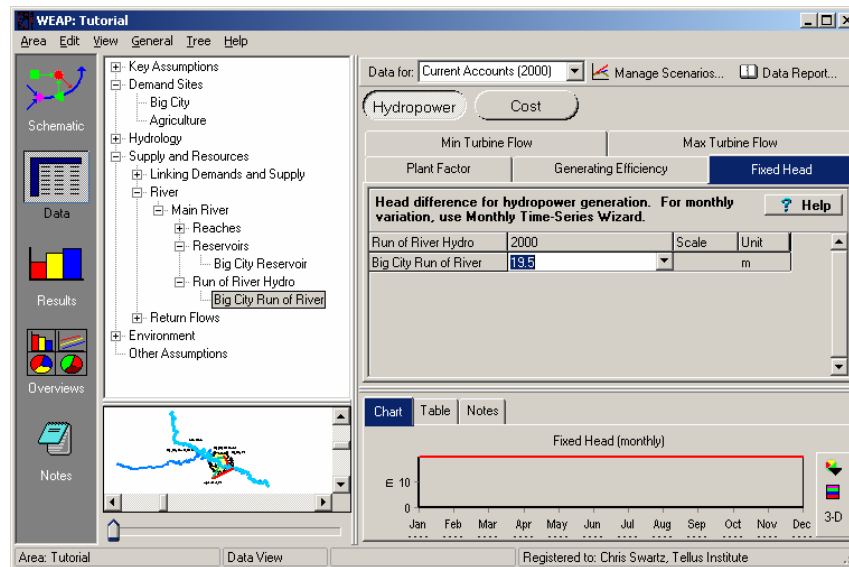

## 2. Run and Compare Results

Run your model and create a graph comparing the power production for the run-of-river and the reservoir power plants. Do this by selecting “All Hydropower” from the pull-down menu above the legend.



*What are the reasons for the differences between both curves?*

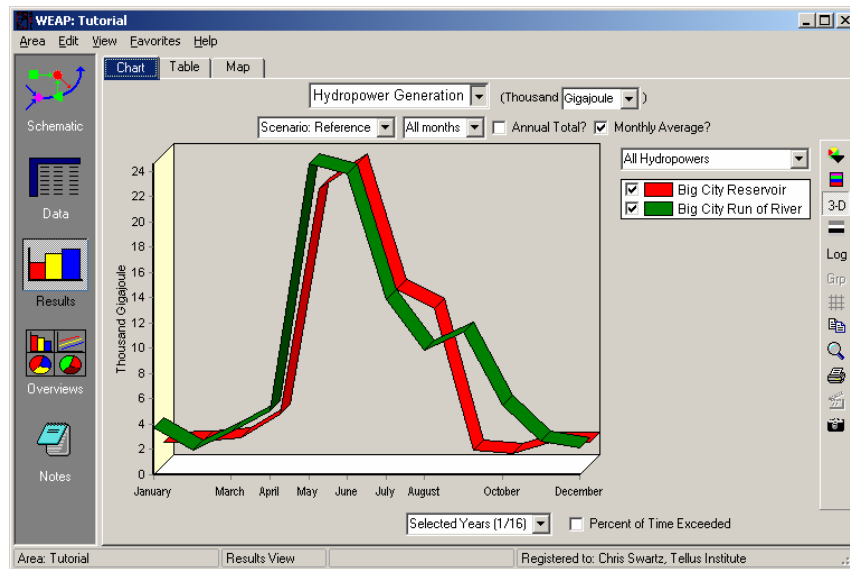

Note that the Run of River hydropower is slightly higher in May than June, in contrast to Big City Reservoir power production. This is due to the additional day available in May compared to June. Run of River hydropower production does not have Storage Elevation as limiting effect, whereas the Reservoir was still filling in May, which decrease the Reservoir production for that month compared to June.

***How does the run-of-river plant influence the streamflow of the river, when compared to the Big City Reservoir plant?***

To view this on the chart, select “Streamflow” from the primary variable pull-down menu and choose “Selected Main River Nodes and Reaches” from the pull-down menu above the legend. Select the following reaches: “Headflow”, “Big City Run of River”, “Below Big City Run of River”, “Big City Reservoir”, and “Below Big City Reservoir” from the list.

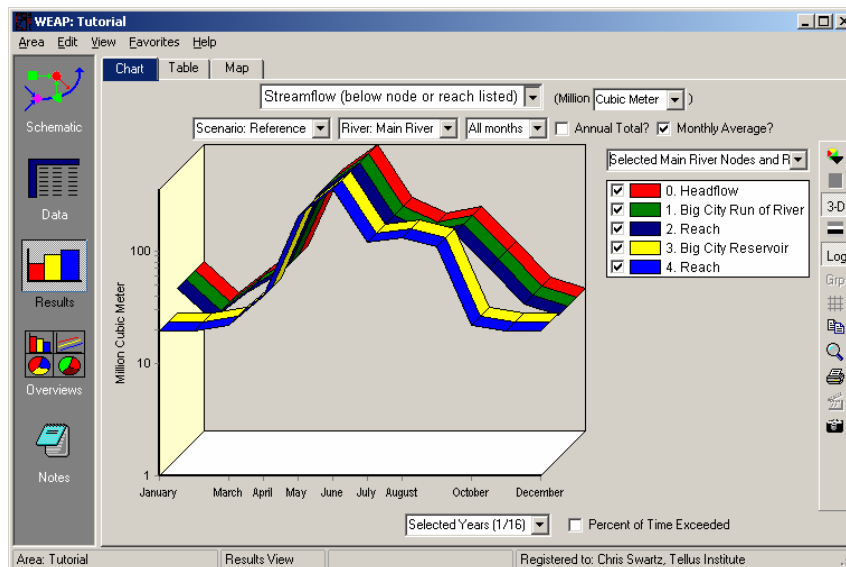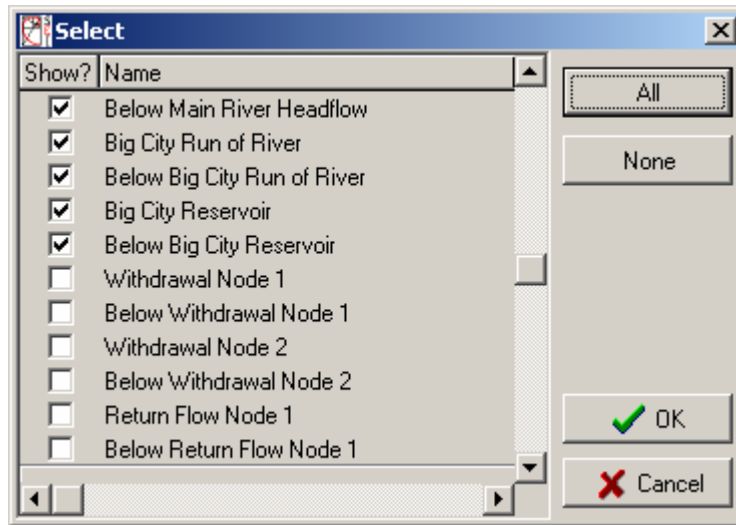

A reservoir can store water during high flows and release during low flow, thus having a smoothing effect. A run-of-river operation, however, processes whatever water flows in the river at any given point in time. Therefore, it does not affect the shape of the streamflow curve.

---

# WEAP

Water Evaluation And Planning System

# Water Quality

## ***A TUTORIAL ON***

<i>Setting up Quality Modeling .....</i>	<i>142</i>
<i>Entering Water Quality Data.....</i>	<i>144</i>
<i>Using Water Quality Inflow Constraints for a Demand Site.....</i>	<i>150</i>
<i>Entering Pollution Generating Activity for Demand Sites .....</i>	<i>153</i>
<i>Modeling a Wastewater Treatment Plant .....</i>	<i>155</i>

**November 2005**



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.seib.org/weap>

**Note:**

For this module you will need to have completed the previous modules (“WEAP in One Hour, Basic Tools, and Scenarios) or have a fair knowledge of WEAP (data structure, Key Assumptions, Expression Builder, creating scenarios). To begin this module, go to the Main Menu, select “Revert to Version” and choose the version named “Starting Point for all modules after ‘Scenarios’ module.”

## Setting up Quality Modeling

### 1. Understanding Water Quality Modeling in WEAP




WEAP can model both conservative and non-conservative pollutants. Conservative pollutants are modeled through a simple mass balance. Several models are offered for non-conservative pollutants.

*Read the Environment Overview help topic for a more detailed description of WEAP capabilities.*

### 2. Create a Set of Pollutants

Create a set of pollutants that will be modeled by going to the “General \ Water Quality Constituents” menu. In the dialog box, make the following change for “Temperature” (already listed) and add “TSS” (Total Suspended Solids) and “Salt” to the list of constituents (“BOD” and “DO” should also already be listed):

<i>Name</i>	<i>Calculate by</i>	<i>Decay Rate</i>
<i>Temperature</i>	<i>Change to “modeled”</i>	
<i>TSS</i>	<i>Decay</i>	<i>0.25 per day</i>
<i>Salt</i>	<i>Conservative</i>	

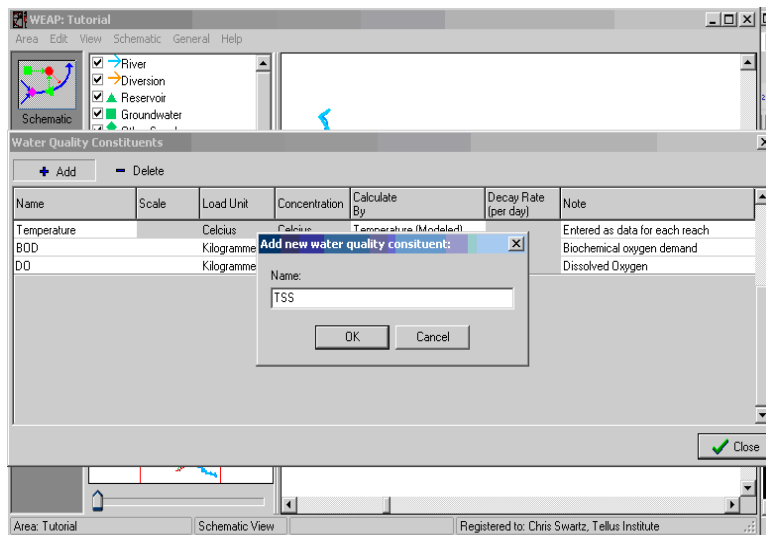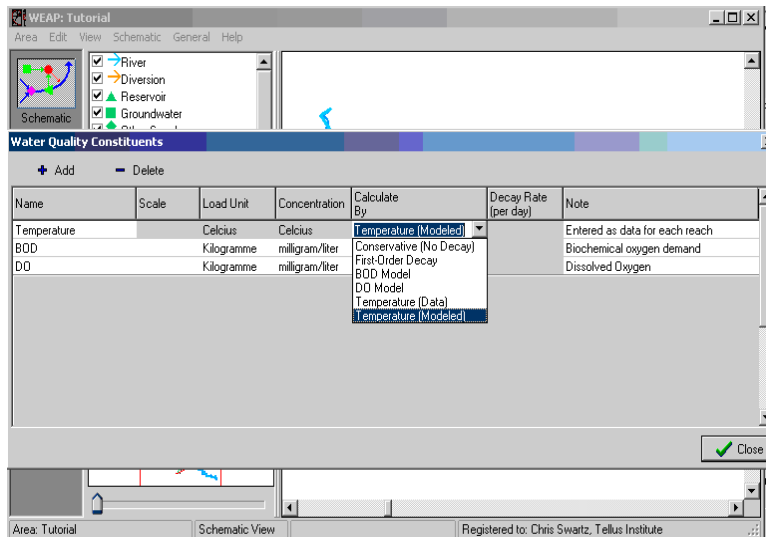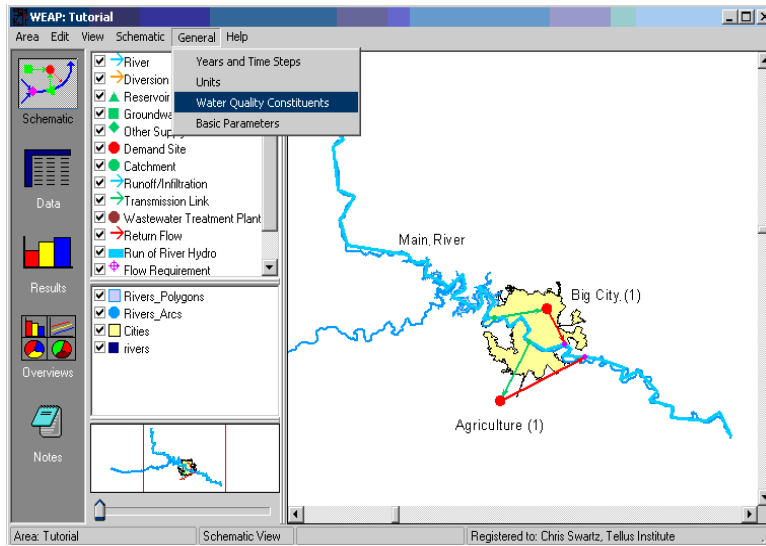

Water Quality Constituents						
Name	Scale	Load Unit	Concentration	Calculate By	Decay Rate (per day)	Note
Temperature		Celcius	Celcius	Temperature (Modeled)		Entered as data for each reach
BOD		Kilogramme	milligram/liter	BOD Model		Biochemical oxygen demand
DO		Kilogramme	milligram/liter	DO Model		Dissolved Oxygen
TSS		Kilogramme	milligram/liter	First-Order Decay	0.25	

Water Quality Constituents						
Name	Scale	Load Unit	Concentration	Calculate By	Decay Rate (per day)	Note
Temperature		Celcius	Celcius	Temperature (Modeled)		Entered as data for each reach
BOD		Kilogramme	milligram/liter	BOD Model		Biochemical oxygen demand
DO		Kilogramme	milligram/liter	DO Model		Dissolved Oxygen
TSS		Kilogramme	milligram/liter	First-Order Decay	0.25	
Salt		Kilogramme	milligram/liter	Conservative (No Decay)		



More details are provided on the different models used for BOD and DO models in the “Dissolved Oxygen and Biochemical Oxygen Demand” help topic.

## Entering Water Quality Data



### 1. Enter River Water Quality data

In the Data view tree, select “Supply and Resources \ River” and click on the Main River. Then open the “Water Quality” screen and enter the following data, which will represent water quality at the headflow of the river:

*Model Water Quality?*      *YES (check the box)*  
*Temperature*                      *15°C*



BOD concentration            5mg/l  
 DO Concentration            8mg/l  
 TSS concentration           20mg/l  
 Salt concentration            2mg/l

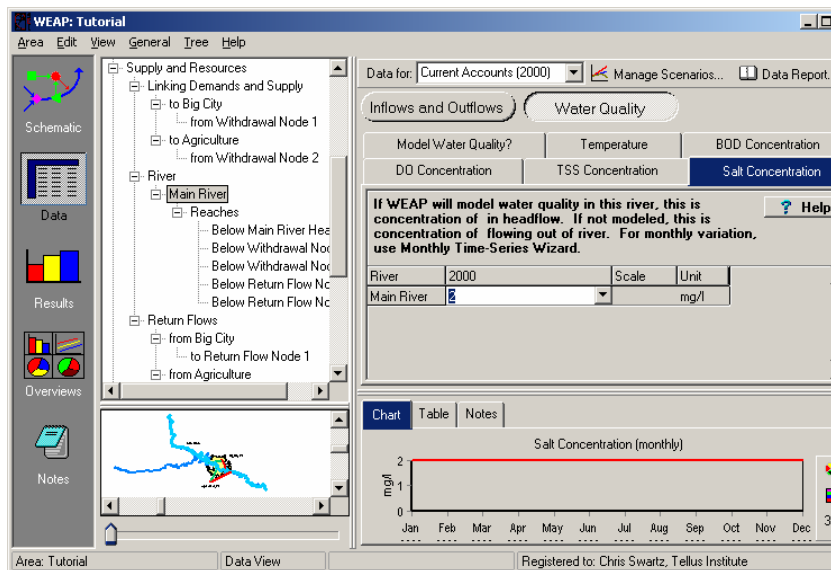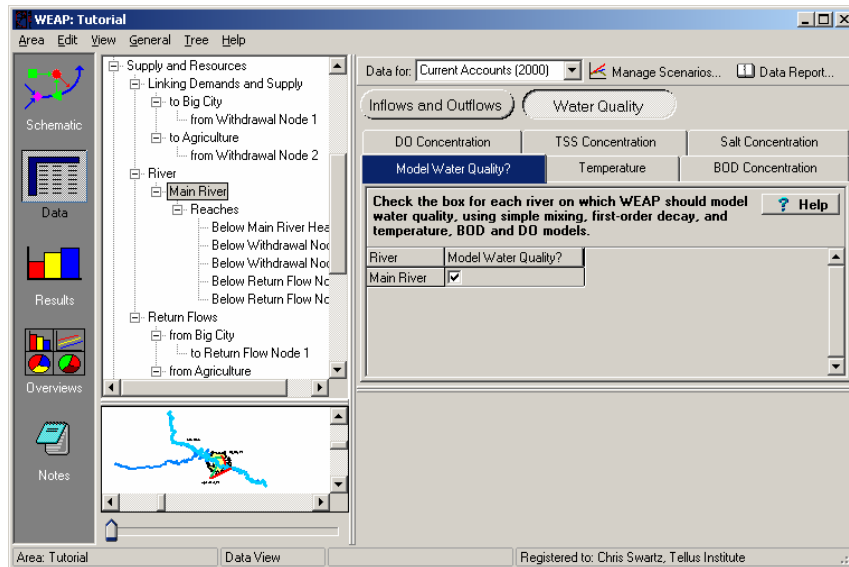


## 2. Enter River Geometric Characteristics

River geometric characteristics are needed for the various water quality models. They are mainly used to compute velocity/residence time of the water along a reach. In the Data view, select the “Reaches” branch of the

Main River and enter the following information under the “Water Quality” tabs.

*Headflow Distance Marker*                      0 km  
*Tailflow Distance Marker*                      300 km

*Note: intermediate reach lengths will be estimated by WEAP based on the schematic.*

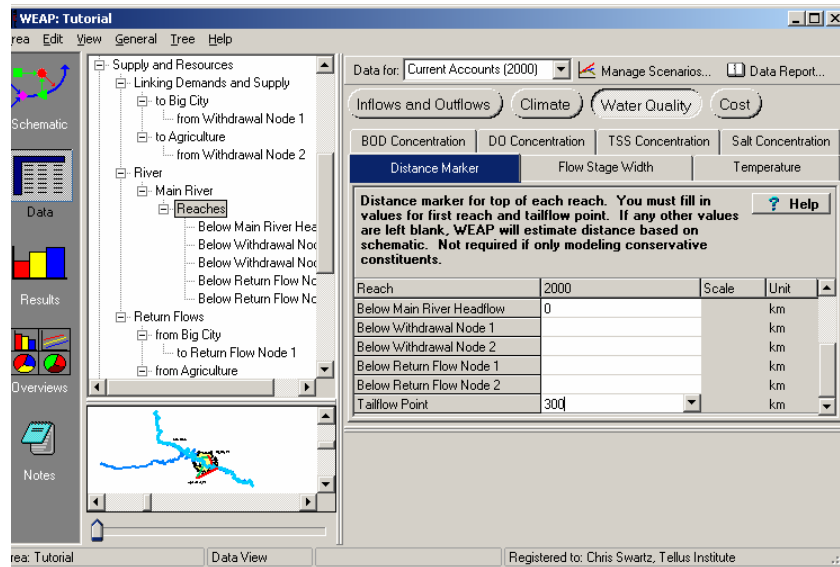

*Flow Stage Width for the “Below Main River Headflow” reach (use the Wizard by clicking on the drop-down arrow)*

<i>Flow</i>	<i>Stage</i>	<i>Width</i>
0	0.00	0.00
10	2.00	15.00
50	6.00	20.00
100	8.00	25.00
200	10.00	30.00

*Your final formula should read:*

*FlowStageWidthCurve( 0, 0, 0, 10, 2, 15, 50, 6, 20, 100, 8, 25, 200, 10, 30 )*

*We will assume this section remains constant and leave other reaches empty.*

WEAP: Tutorial

Area Edit View General Tree Help

Data for: Current Accounts (2000) Manage Scenarios... Data Report...

Inflows and Outflows | Climate | Water Quality | Cost

BOD Concentration | DO Concentration | TSS Concentration | Salt Concentration

Distance Marker | **Flow Stage/Width** | Temperature

Enter data relating river stage and width to flow. Use Flow-Stage-Width Wizard. To use values from upstream reach, leave blank. Not required if only modeling conservative constituents.

Reach: 2000

Below Main River Headflow

Below Withdrawal Node 1

Below Withdrawal Node 2

Below Return Flow Node 1

Below Return Flow Node 2

Expression Builder

Flow-Stage-Width Wizard

Area: Tutorial | Data View | Registered to: Chris Swartz, Tellus Institute

Flow-Stage-Width Wizard

Enter data points relating flow to width and stage for reach Below Main River Headflow

Flow (CMS)	Stage (m)	Width (m)	Velocity (m/s)
0.00	0.00	0.00	0.00
10.00	2.00	15.00	0.33
50.00	6.00	20.00	0.45
100.00	8.00	25.00	0.63
200.00	10.00	30.00	0.91

Preview

Stage vs Flow (CMS): Graph showing Stage (m) increasing from 0 to 10 as Flow (CMS) increases from 0 to 200.

Width vs Flow (CMS): Graph showing Width (m) increasing from 0 to 30 as Flow (CMS) increases from 0 to 200.

Velocity vs Flow (CMS): Graph showing Velocity (m/s) increasing from 0 to 0.91 as Flow (CMS) increases from 0 to 200.

Streambed Shape vs Width (m): Graph showing Stage (m) increasing from 0 to 10 as Width (m) increases from 0 to 30.

Finish Cancel

WEAP: Tutorial

Area Edit View General Tree Help

Data for: Current Accounts (2000) Manage Scenarios... Data Report...

Inflows and Outflows | Climate | Water Quality | Cost

BOD Concentration | DO Concentration | TSS Concentration | Salt Concentration

Distance Marker | **Flow Stage/Width** | Temperature

Enter data relating river stage and width to flow. Use Flow-Stage-Width Wizard. To use values from upstream reach, leave blank. Not required if only modeling conservative constituents.

Reach: 2000

Below Main River Headflow

Below Withdrawal Node 1

Below Withdrawal Node 2

Below Return Flow Node 1

Below Return Flow Node 2

Expression Builder

Flow-Stage-Width Wizard

Area: Tutorial | Data View | Registered to: Chris Swartz, Tellus Institute



---

The “Reach Length” tab displayed under the “Inflows and Outflows” screen is used only for groundwater-surface water interaction modeling. Since this interaction can occur along segments of the total reach length, it can differ from the total reach length. Note that the reach length data input here is not used for water quality modeling.


---

### 3. Enter the Climatic Data

Climatic Data are needed to compute water temperature. Click on the “Climate” button and again select the “Below Main River Headflow” reach. Enter the following climate data:


#### *Air Temperature*

<u>Month</u>	<u>Value (°C)</u>
<i>Jan</i>	10
<i>Feb</i>	11
<i>Mar</i>	13
<i>Apr</i>	15
<i>May</i>	21
<i>Jun</i>	24
<i>Jul</i>	29
<i>Aug</i>	31
<i>Set</i>	28
<i>Oct</i>	20
<i>Nov</i>	16
<i>Dec</i>	12

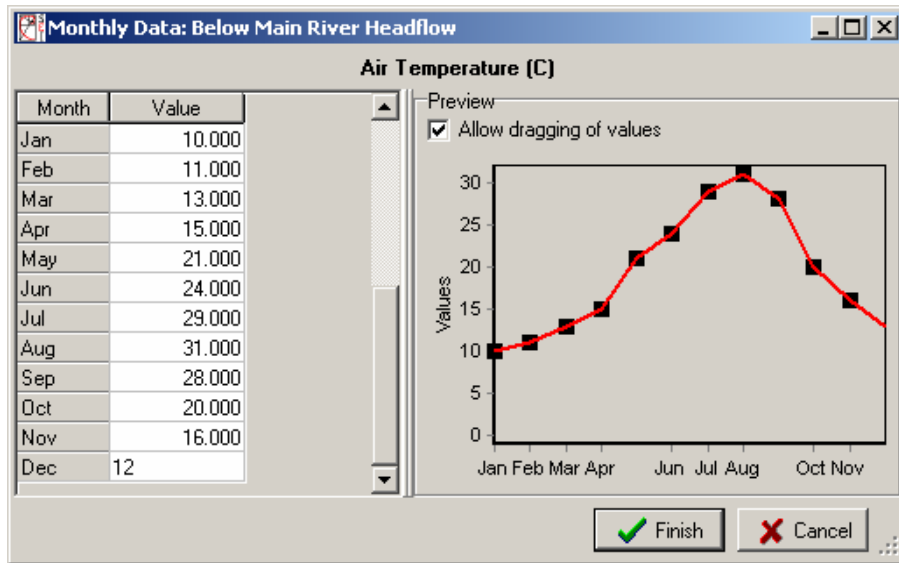

Humidity 65%  
 Wind 1 m/s  
 Latitude 30°

*Note: you can enter these values for the first reach and leave the other reaches blank if you want the value to apply to all reaches.*

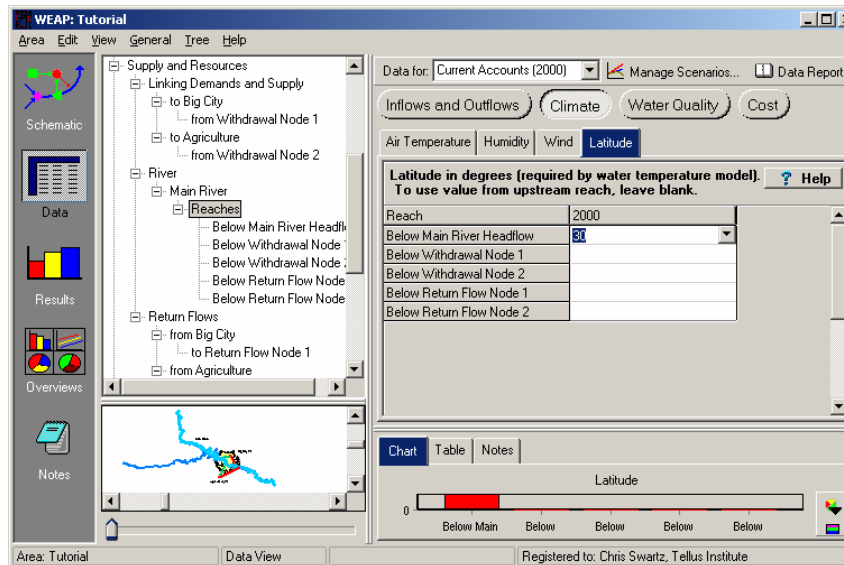

# Using Water Quality Inflow Constraints for a Demand Site


## 1. Enter Constraint Data

A demand site may require that its water supply meets certain quality criteria. Create a new scenario inherited from the "Reference" scenario and name it "Big City Water Quality Inflow Constraints". In the Data view (make sure you are in this new scenario), select the Big City branch of the data tree, and click on the "Water Quality" button. Under the "BOD Inflow" tab, enter the following maximum allowed concentration of BOD:

<i>BOD inflow</i>	<i>2 mg/L</i>
-------------------	---------------

## 2. Compare Results


Note that you earlier entered a BOD concentration (5 mg/L) for the Main River Headflow (under Current Accounts), so you can now run the results and compare the output for Big City Demand Site Coverage, with and without this inflow constraint for Big City. For the period 2000 and 2001, a comparison of Big City Demand Site Coverage for the "Reference" and "Big City Water Quality Inflow Constraints" scenarios should look like the following:

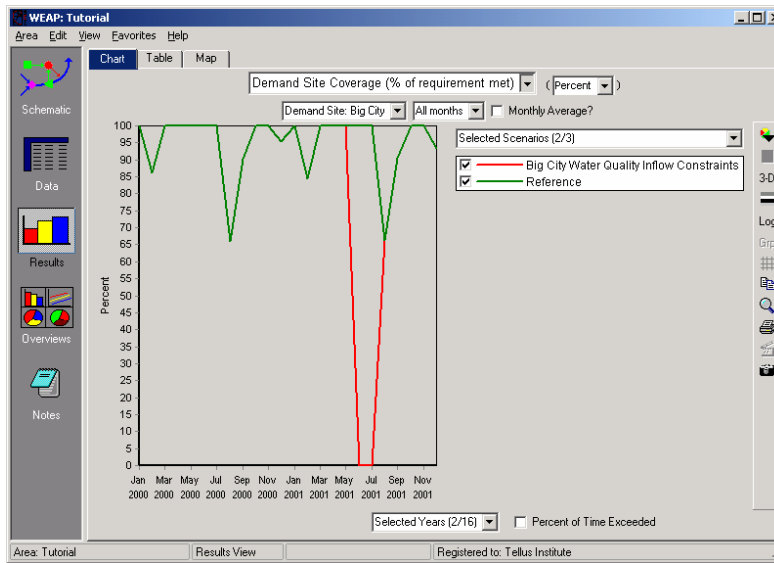

*Why does Big City Coverage drop to zero during June, 2001, in the Inflow Constraint scenario?*





If you look at the BOD concentration in the “Below Main River Headflow” reach (pictured below), you will see that BOD rises above the constraint (2 mg/L) for Big City intake during the month of June for both 2000 and 2001. Since the constraint is activated during the scenario period (starting in 2001), coverage for Big City decreases during June, 2001, because this demand site will not accept water that falls below the BOD constraint, and no other sources of water other than the Main River have been designated as supplies for Big City.

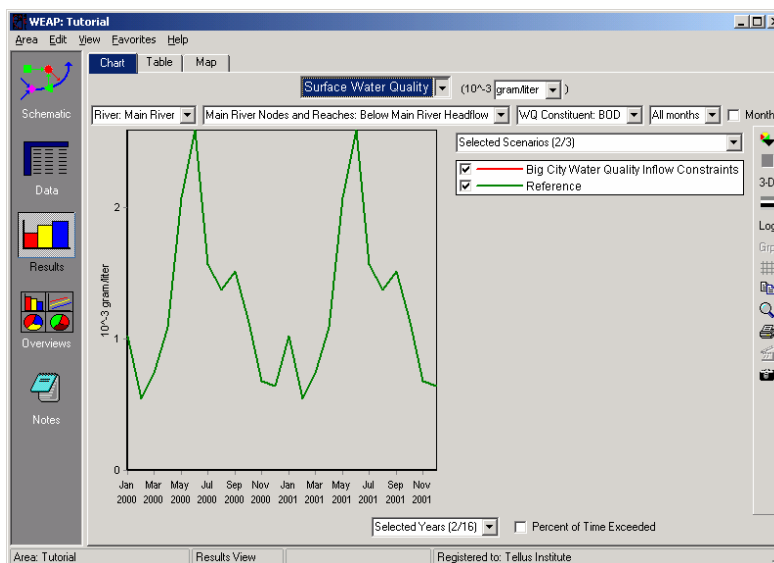



The simulated temporal pattern of the BOD concentration along this reach of the Main River is a function of degradation, the extent of which is controlled by the residence time of the water in the “Headflow” reach. The longer the residence time in this reach, the more degradation that occurs. The pattern for BOD thus mirrors that of the flow velocity, and streamflow, for the reach (both pictured below).

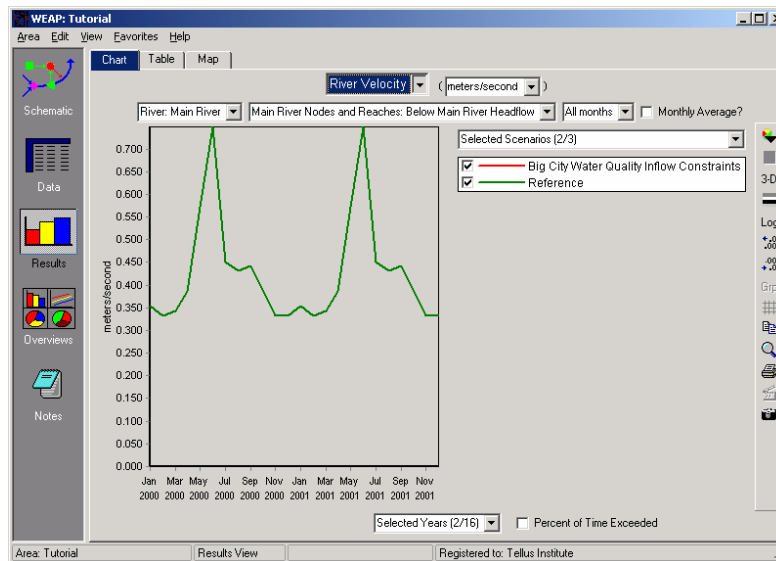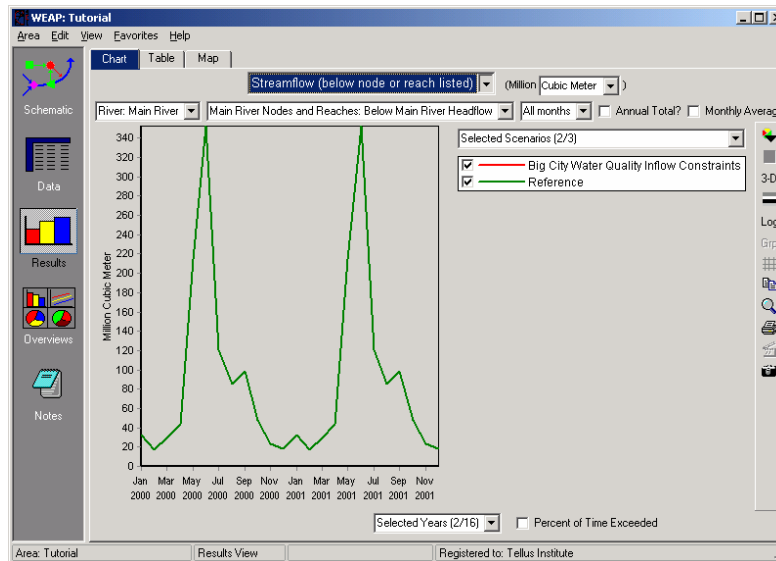



# Entering Pollution Generating Activity for Demand Sites

## 1. Entering Data

We will assume that we know the concentration of pollutants in the outflow (Return Flow) for Big City. Hence, we will use the “Concentration” series of tabs in the “Demand Sites\Big City” branch of the Data tree. Click on the “Water Quality” button and enter the following data (in Current Accounts):

<i>Temperature</i>	16 °C
<i>BOD Concentration</i>	60 mg/l
<i>DO Concentration</i>	3 mg/l
<i>TSS Concentration</i>	5 mg/l
<i>Salt Concentration</i>	10 mg/l


The screenshot shows the WEAP Tutorial software interface. The 'Data' tree on the left is expanded to 'Demand Sites' > 'Big City'. The 'Water Quality' tab is selected in the 'Data for: Current Accounts (2000)' section. The 'Temperature' sub-tab is active, showing a table for entering data:

Demand Site	2000	Scale	Unit
Big City	16		C

Below the table is a chart titled 'Temperature (monthly)' with a y-axis from 0 to 15 and an x-axis for months from Jan to Dec. The chart area is currently empty.

For the Agriculture demand site, we will admit that we do not know the concentration at the outflow, but we do know the pollutant generation intensity. Enter the following data:

<i>BOD intensity</i>	<i>50 kg/ha</i>
<i>DO Intensity</i>	<i>30 kg/ha</i>
<i>TSS Intensity</i>	<i>20 kg/ha</i>
<i>Salt Intensity</i>	<i>2 kg/ha</i>
<i>Temperature</i>	<i>15°C</i>

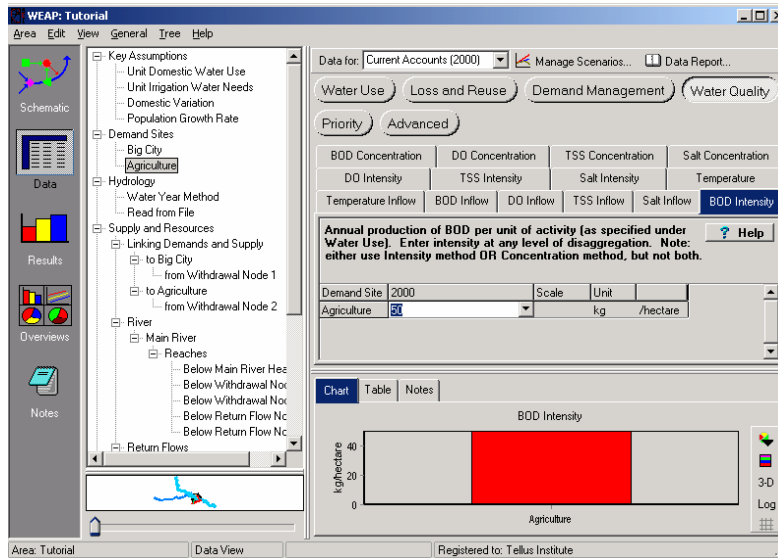


Inputting data for Pollutant Generation, using either method, will cause WEAP to disregard any pollutant concentration specified or simulated in the inflow to the demand site.

## 2. Evaluate the Results

Run the model and look at the following results for various water quality constituents. Select “Pollution Generation” from the primary variable pull-down menu (under Water Quality):

*Demand Site Pollution Generation*  
*Surface Water Quality*

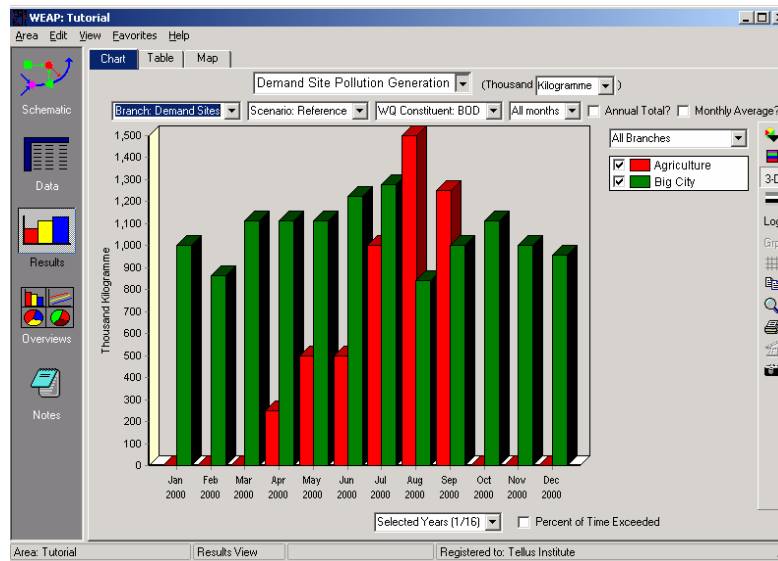


Note that Pollution Generation for Agriculture is constrained to the spring and summer months when farming is active.

## Modeling a Wastewater Treatment Plant


### 1. Create a Wastewater Treatment Plant

Create a new scenario named “Wastewater Treatment Plant Added” - this scenario is inherited from the “Reference”. Then, add a Wastewater Treatment Plant for Big City, name it “Big City WWTP” and make it inactive in Current Accounts, and create another Return flow link from the Big City to the WWTP. Keep the existing Return Flow Link from Big City to the river. Also create a return flow from the WWTP to the river. Your model should look similar to the figure below:

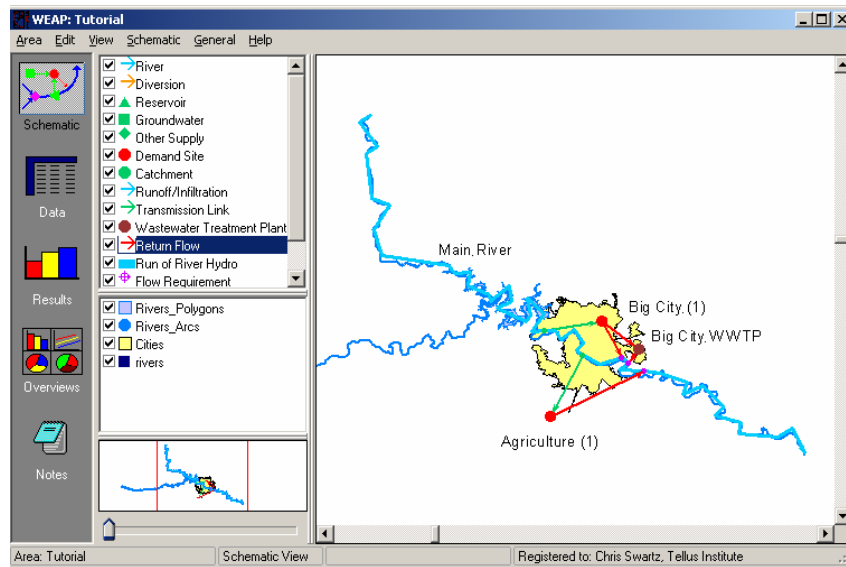


You will have to set the “Return Flow Routing” variables for both links.


*For the Return Flow from Big City to Main River (Return Flow Node 1), set the Routing to 100% for the Current Accounts year and 0% for years 2001-2015 in the “Wastewater Treatment Plant Added” scenario.*

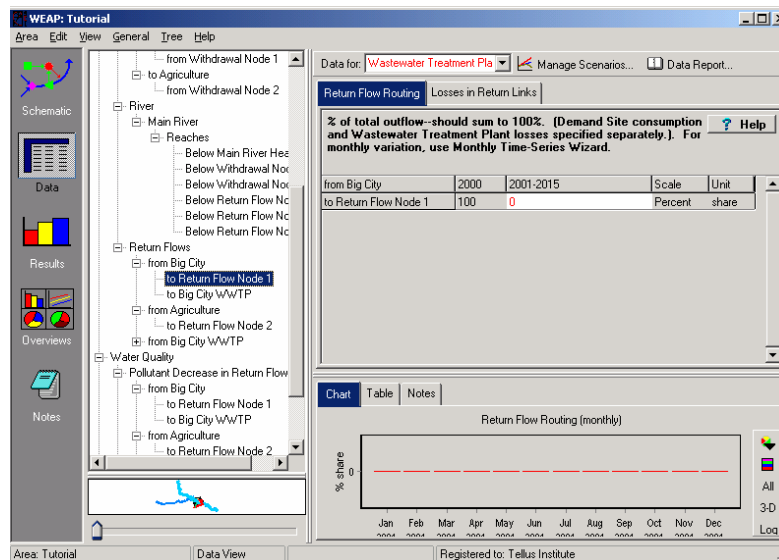


*For the Return Flow from Big City to the Big City WWTP, set the Return Flow to 100% for the years 2001-2015 in the same scenario.*

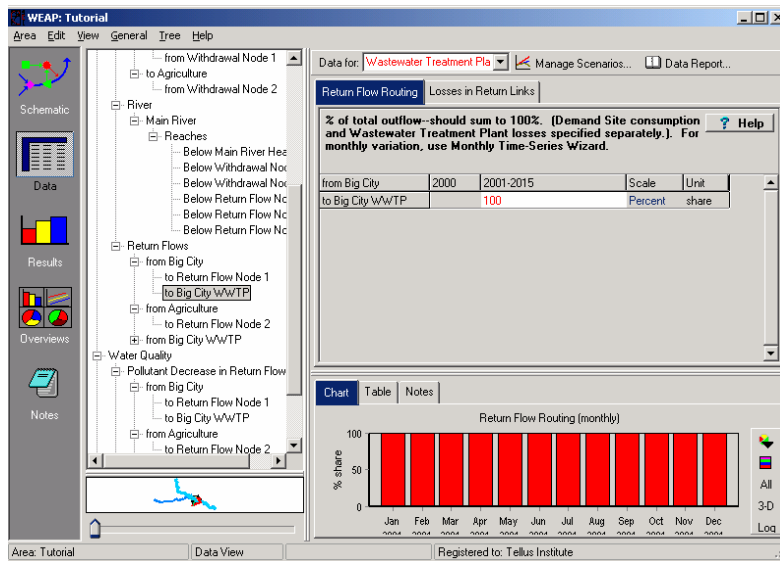

Also set the Routing to 100% for the Return Flow from the Big City WWTP to the Main River (Return Flow Node 3).

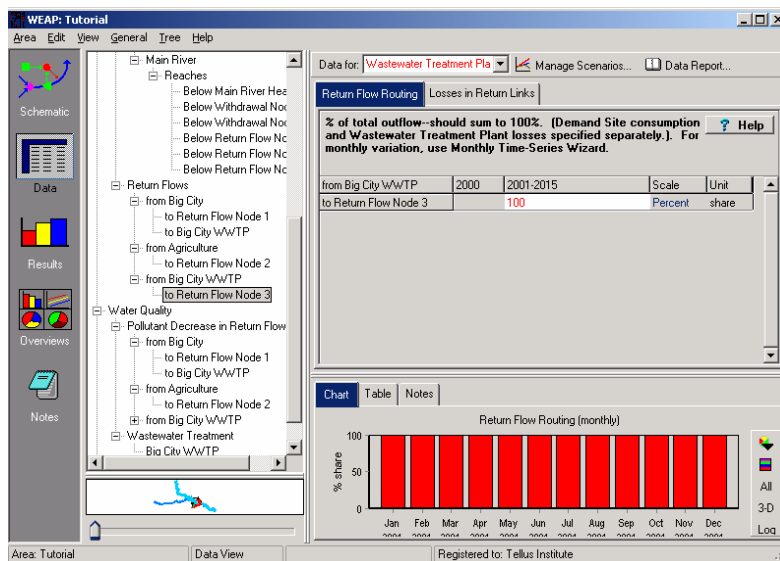


You also have the possibility to set removal rates in the various return flows. This would be useful if, for example, a given pollutant is decomposed by bacteria in the sewer system. These data can be entered under the “Water Quality \ Pollutant Decrease in Return Flow” branches for the appropriate return flows (see figure below for example).

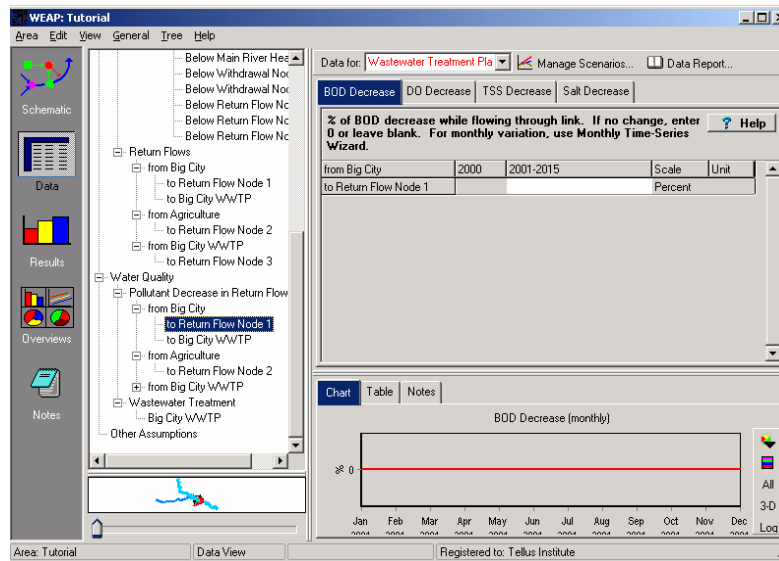

## 2. Enter WWTP Data


First, enter the “Start Year” by clicking on the “Start Year” button under the “Water Quality \ Wastewater Treatment” branch of the data tree for Big City WWTP.

*Start Year*                      2001

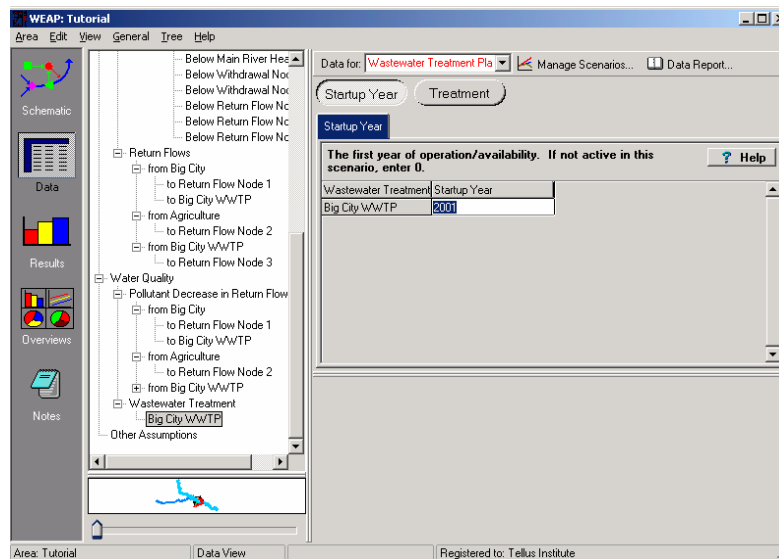

Also enter the following data in the “Treatment” window (with the “Wastewater Treatment Plant Added” scenario selected):

<i>Consumption</i>	5%
<i>Daily Capacity</i>	2M m <sup>3</sup>
<i>BOD Removal</i>	90%
<i>DO Concentration</i>	5mg/l
<i>TSS Removal</i>	80%
<i>Salt Removal</i>	20%
<i>Temperature</i>	15°C

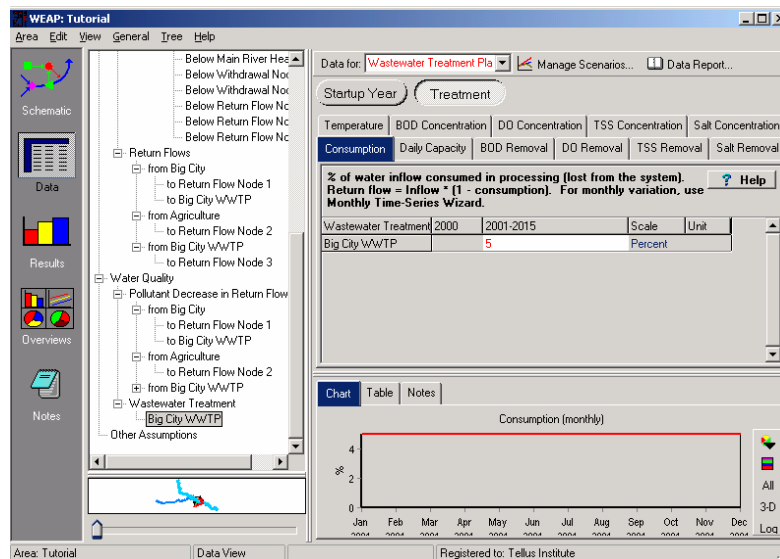

If only part of the wastewater is treated through the WWTP, there are two modeling possibilities. One is to limit the Daily Capacity to whatever amount can actually be treated. In this case the wastewater in excess will be discharged without treatment. In this case, the share of untreated wastewater is not constant, but depends on the total flow.



Another solution is to create an additional return flow going from the demand site straight to the river, by-passing the WWTP. In this case, a constant share can be set to by-pass the WWTP by setting the return flow routing shares accordingly. A combination of both methods is also possible.


### 3. Evaluate the Results

Run the model and look at the following results for BOD in the “Wastewater Treatment Plant Added” scenario, comparing them with the “Reference” scenario values (without a wastewater treatment plant).

-Surface Water Quality (BOD downstream of Big City's outflow into the river).

To view these results, first select "Surface Water Quality" under "Water Quality" in the primary variable pull-down menu. Then choose "Selected Scenarios" under the pull-down menu above the chart legend and select the "Reference" and "Wastewater Treatment Plant Added" scenarios.

Using the pull-down menu at the bottom of the chart, select the years 2000 and 2001 for viewing. Select "Below Return Flow Node 3" (Return Flow Node 3 is the return flow for the WWTP, so you will be looking at water quality in the river just downstream of the outflow from the WWTP) as the Main River reach to view. Select "BOD" as the water quality constituent from the pull-down menu directly above the chart, and unclick the "Monthly Average" button to the far right. Your screen should look like the one below:

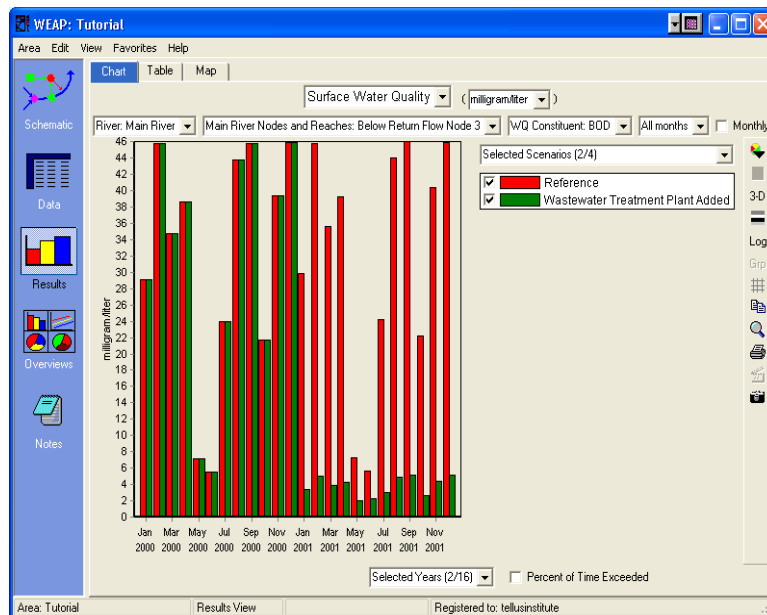


Note that BOD levels decrease substantially in 2001 compared to 2000 in the reach below the return flow from the treatment plant because the plant becomes active that year.



-WEAP can also display water quality results from upstream to downstream.


From the bottom menu, choose “All Main River Nodes and Reaches” and check “Represent true relative distance?” This will show all nodes and reaches along the X-axis, with their spacing proportional to their distance downstream (distances shown in parentheses). Select July, 2010, as the month and year. For the chart type, select “Line”.

The charts shows that BOD levels rise as BOD-laden return flows enter the river, and decline as the BOD decays as it moves downstream. The effect of the wastewater treatment plant can be clearly seen. Your chart should look like this:

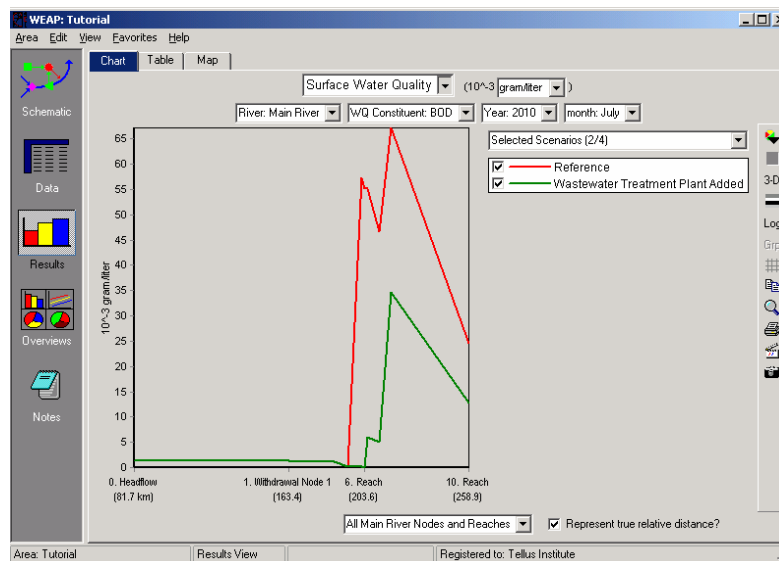

-Wastewater Treatment Plant Inflows and Outflows.

To view these results, select the “Wastewater Treatment Plant Inflows and Outflows” (under Water Quality) from the primary variable pull-down menu. Also select the “Wastewater Treatment Plant Added” scenario from the far upper left menu.

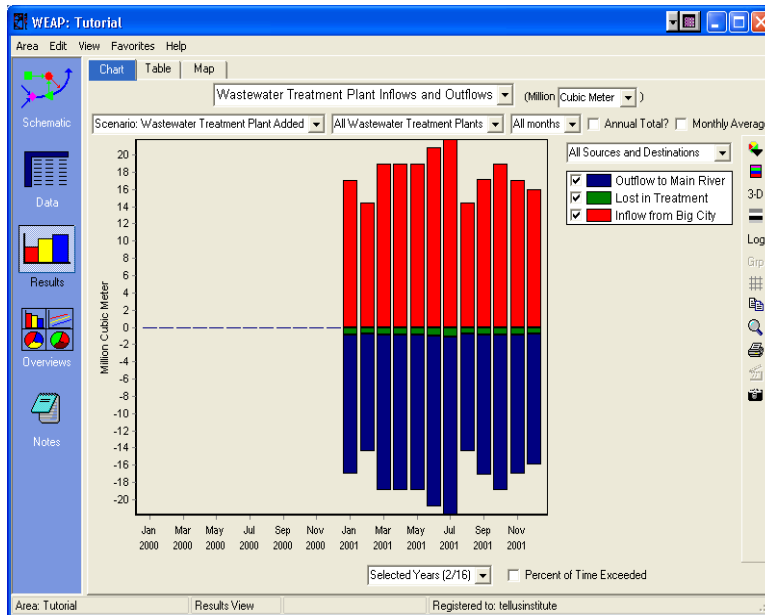

In this type of chart, the outflows are represented as negative values and inflows are positive values. Note also that the "Lost in Treatment" category represents the flow that is consumed - a consumption rate of 5% was input in the data view for the treatment plant.

---

**WEAP**  
Water Evaluation And Planning System

**Hydrology**

**A TUTORIAL ON**

*Modeling Catchments: the Rainfall Runoff*  
Model ..... 164

*Modeling Catchments: the Soil Moisture*  
Model ..... 169

*Simulating Surface Water-Groundwater*  
Interaction..... 176

**November 2005**



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.seib.org/weap>

**Note:**

For this module you will need to have completed the previous modules (“WEAP in One Hour, Basic Tools, and Scenarios) or have a fair knowledge of WEAP (data structure, key assumptions, expression builder, creating scenarios). To begin this module, go to the Main Menu, select “Revert to Version” and choose the version named “Starting Point for all modules after ‘Scenarios’ module.”



# Modeling Catchments: the Rainfall Runoff Model

## 1. Create a New Catchment

Create a “Catchment” object in the Schematic view to simulate headflow for Main River. Do this by pulling over a Catchment node and locating it near the starting point of the Main River. Name it “Main River Headflow”. Once positioned, a dialog box will open and request the following data:


<i>Runoff to</i>	<i>Main River</i>
<i>Represents Headflow</i>	<i>Yes (check box)</i>
<i>Infiltration to</i>	<i>No inflow to GW</i>
<i>Includes Irrigated Areas</i>	<i>No (Default)</i>
<i>Demand Priority</i>	<i>1 (default)</i>

Note that when you have finished creating the Catchment node, a dashed blue line will automatically appear in the schematic linking the node to the Main River.

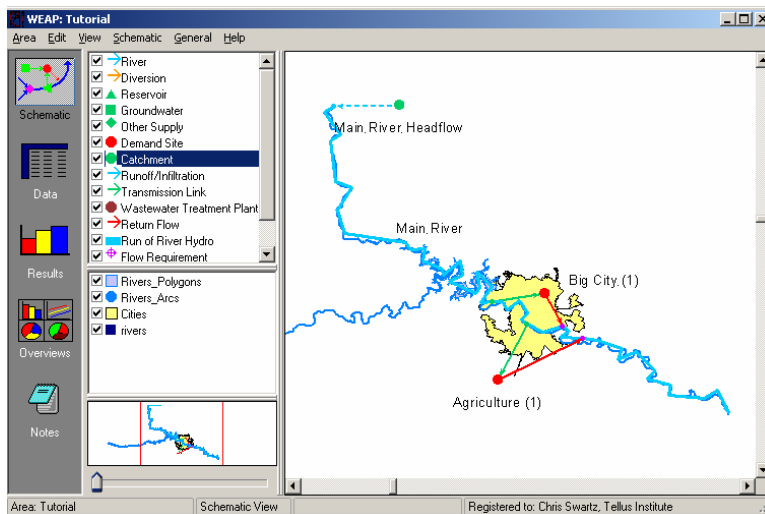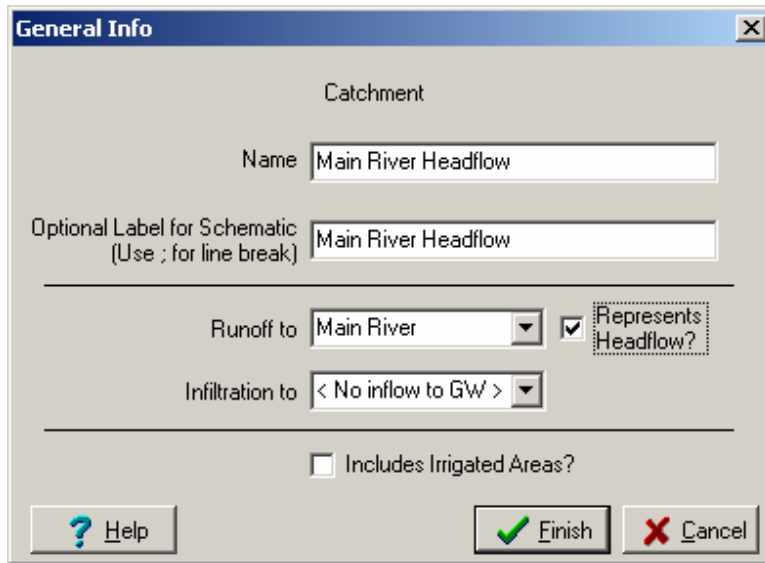


## 2. Create an Appropriate Substructure in the Basin

The first time you right click on the Catchment or select it in the Data Tree, you will get a window that asks you to select a model for the Catchment:

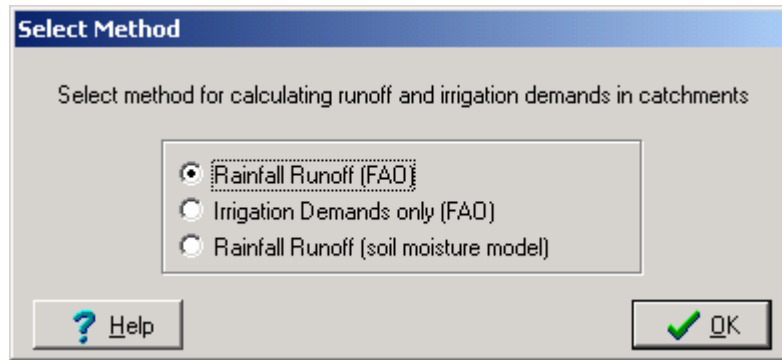

Select the Rainfall Runoff (FAO) method.


There is also the opportunity to change this selection later by clicking on the “Advanced” tab in the Data view:

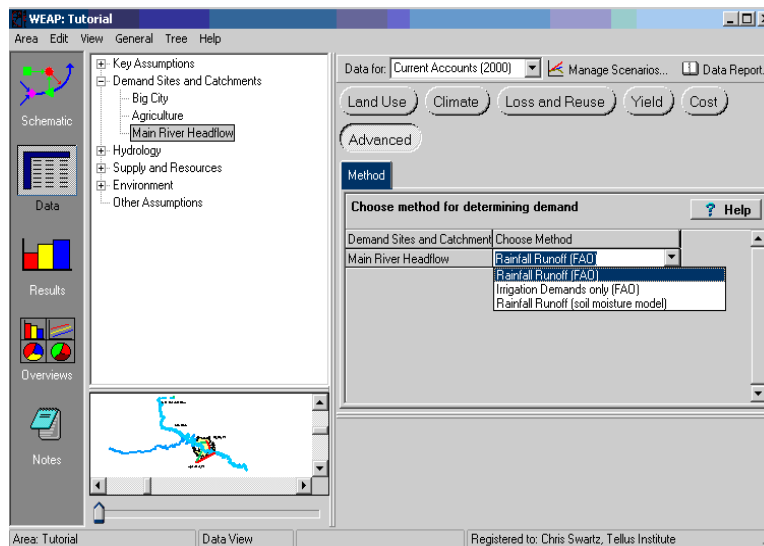

In the Data tree of the Data View, click on the “Land Use” button and enter the following data (make sure you are in the Current Accounts):

<i>Area</i>	<i>10M ha (you will have to choose the units first)</i>
<i>Effective Prec.</i>	<i>98%</i>
<i>Crop Coefficients (use the Monthly Time Series Wizard to input these data)</i>	
<i>Sep to Feb</i>	<i>0.9</i>
<i>March</i>	<i>1.0</i>
<i>April</i>	<i>1.1</i>

May 1.4  
Jun to Aug 1.1

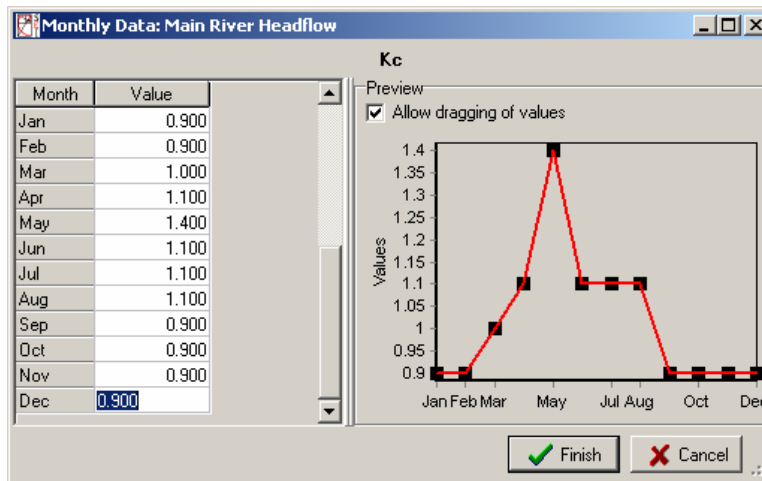

Note that if you had clicked “yes” when asked if irrigated areas were to be included in this catchment (under General Info when creating catchment), another button “Irrigation” would have appeared under the catchment in the Data view. This button would have two tabs under it: (1) “Irrigated”, where you would input either a “0” for not irrigated, or a “1” for irrigated for a particular land class; and (2) “Irrigated fraction” where you would specify the fraction of irrigation water supplied to the area that is available for evapotranspiration.

---

The Rainfall Runoff method is a simple method that computes runoff as the difference between precipitation and a plant’s evapotranspiration. A portion of the precipitation can be set to bypass the evapotranspiration process and go straight into runoff to ensure a base flow (through the “effective precipitation” parameter).

The evapotranspiration is estimated by first entering the reference evapotranspiration, then defining crop coefficients for each type of land use (Kc’s) that multiply the reference evapotranspiration to reflect differences occurring from plant to plant.



More information about this method can be obtained from the FAO Irrigation and Drainage Paper 56, called “Crop Evapotranspiration” and available from the FAO’s website ([www.fao.org](http://www.fao.org)).

Entering an effective precipitation other than 100% is one way of acknowledging the fact that part of the rainfall is not submitted to evapotranspiration during high intensity rainfall events, hence generating a minimal runoff to the river even when the rainfall is lower than the potential evapotranspiration. Another solution is to move to more developed models such as the 2-buckets soil moisture model coupled with Surface Water – Groundwater interaction modeling, as presented later in this module.

---

### 3. Enter the Climatic Data

Climatic Data are entered at the catchment level. In the Data View, select the new catchment under the "Demand Sites and Catchments" branch of the data tree and enter the following data under the "Climate" tab using the Monthly Time Series Wizard :

<i>Month</i>	<i>Precip.</i>	<i>Month</i>	<i>ETref</i>
<i>Jan</i>	21	<i>Jan</i>	42
<i>Feb</i>	37	<i>Feb</i>	47
<i>Mar</i>	56	<i>Mar</i>	78
<i>Apr</i>	78	<i>Apr</i>	86
<i>May</i>	141	<i>May</i>	131
<i>Jun</i>	114	<i>Jun</i>	122
<i>Jul</i>	116	<i>Jul</i>	158
<i>Aug</i>	85	<i>Aug</i>	140
<i>Sep</i>	69	<i>Sep</i>	104
<i>Oct</i>	36	<i>Oct</i>	79
<i>Nov</i>	22	<i>Nov</i>	43
<i>Dec</i>	13	<i>Dec</i>	37



If not available from on-site stations, precipitation data can sometimes be derived from world-wide climate models such as the one developed by Tim Mitchell at the University of East Anglia (<http://www.cru.uea.ac.uk/~timm/data/index.html>). The use of GIS software to extract the appropriate data is required. Such models provide average data in opposition to actual data, implying that the calibration is much more delicate.

The Reference Evapotranspiration can be determined from a set of climatic and topographic parameters using the Penman-Monteith equation. More details are provided in the FAO publication mentioned earlier. Also, there exist global models of monthly reference evapotranspiration put together by the FAO, available from the FAO's website.




## 4. Look at the Results

Results for Catchments are located in the “Catchment” category in the primary variable pull-down menu.

-“Runoff from Precipitation” to the Main River should look similar to the graph below.

Select the “Reference” scenario from the pull-down menu above the graph legend, “Main River Headflow” as the Demand site/branch from the menu to the upper left of the graph, and the year 2000 from the “Selected Years” option using the menu at the bottom of the graph.

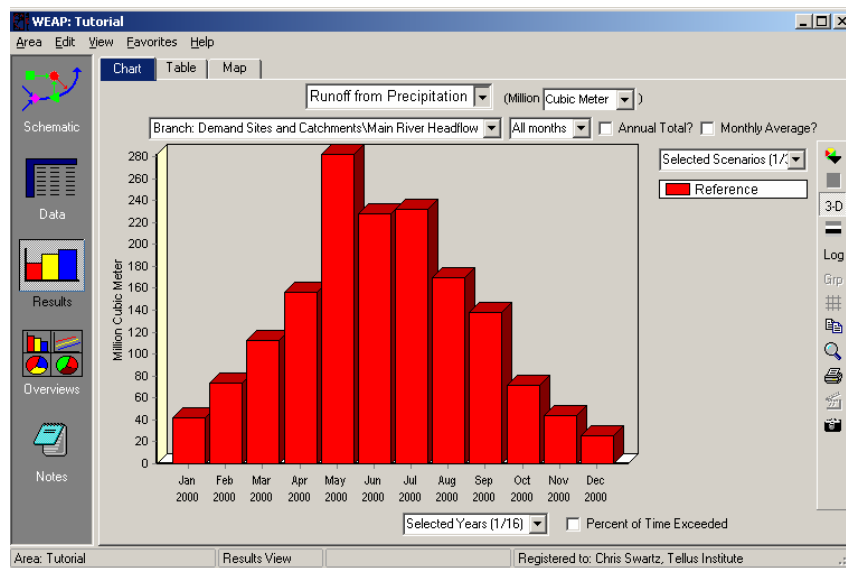

# Modeling Catchments: the Soil Moisture Model

## 1. Replace the Agriculture Demand Site with a Catchment

Delete the Agriculture demand site and create a Catchment in its place. Name it “Agriculture Catchment” and give it the following properties:

<i>Runoff to</i>	<i>Main River</i>
<i>Represents Headflow</i>	<i>No (check box)</i>
<i>Infiltration to</i>	<i>No inflow to GW</i>
<i>Includes Irrigated Areas</i>	<i>Yes (check box)</i>
<i>Demand Priority</i>	<i>1 (default)</i>

Note that the Demand Priority data appears in the window only after selecting “Yes” to “Includes Irrigated Areas”.

**General Info**

Catchment

Name: Agriculture Catchment

Optional Label for Schematic (Use ; for line break): Agriculture Catchment

Runoff to: Main River  Represents Headflow?

Infiltration to: < No inflow to GW >

Includes Irrigated Areas?


Demand Priority: 1

Note: 1 is the highest priority, 99 is the lowest

? Help    ✓ Finish    ✗ Cancel

## 2. Connect the New Catchment

The new catchment should now already be connected to the Main River with a Runoff/Infiltration Link. Add a Transmission Link from the Main River (same starting point as the former Agriculture demand site), with a *Supply Preference of 1*. Your model should now look similar to the figure below:

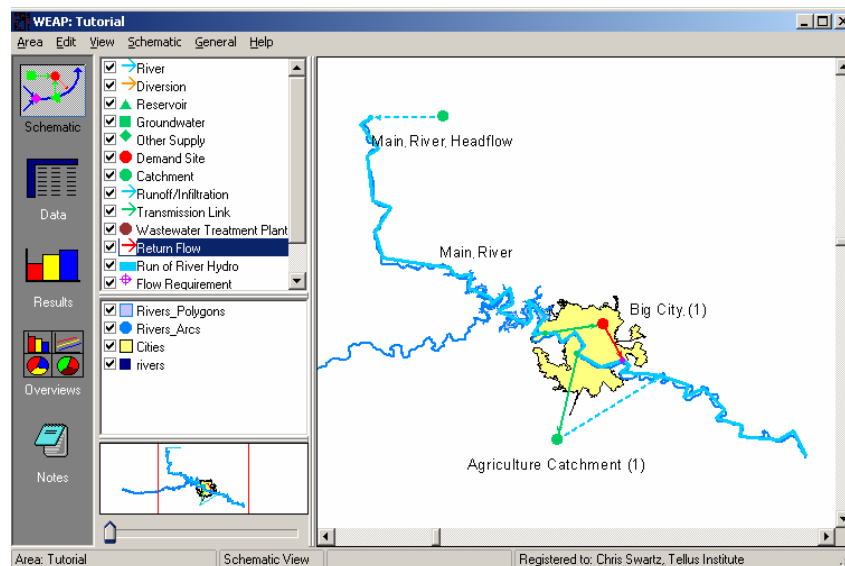

The purpose of this transmission link is to allow supplying irrigated areas with water from the river in case rainfall is insufficient.

### 3. Create sub-structure in the Catchment

We will assume this catchment has three types of land use. In the Data View, add the following branches to your new catchment by right-clicking it in the data tree and selecting "Add". (If you select the catchment for editing by right clicking on the node in the schematic view rather than going through the Data view, you will be asked beforehand to choose a simulation method - pick the "Rainfall Runoff (soil moisture model)" method). Add the following branches:

*Irrigated*  
*Forest*  
*Grasslands*

### 4. Enter the Appropriate Land Use Data


If you have not done so already, select the newly created Catchment in the Data view and pick the "Rainfall Runoff (soil moisture model)" method by clicking on the "Advanced" button. Then enter the following data after clicking on the "Land Use" button:

<i>Total Land Area</i>	<i>300,000 ha (you will have to select units first)</i>		
	<i>Irrigated</i>	<i>Forest</i>	<i>Grasslands</i>
<i>Share of Land Area</i>	<i>33%</i>	<i>25%</i>	<i>remainder(100)</i>
	<i>Irrigated</i>	<i>Forest</i>	<i>Grasslands</i>
<i>Leaf Area Index</i>	<i>3.6</i>	<i>3.0</i>	<i>1.7</i>
<i>Root Zone Conductivity</i>	<i>60</i>	<i>35</i>	<i>45 mm/month</i>
<i>Initial Z1</i>	<i>50%</i>	<i>20%</i>	<i>20%</i>

The remaining variables are the same for all land classes in the catchment:

<i>Initial Z2</i>	<i>20%</i>
<i>Root Zone Water Capacity</i>	<i>900 mm</i>
<i>Deep Water Capacity</i>	<i>35,000 mm</i>
<i>Deep Conductivity</i>	<i>240 mm/month</i>
<i>Preferred Flow Direction</i>	<i>0.15</i>

*Kc* Use the same values as input for the Main River Headflow catchment in the previous exercise. You can simply copy and paste that expression into the Kc field for the Agriculture Catchment land classes.

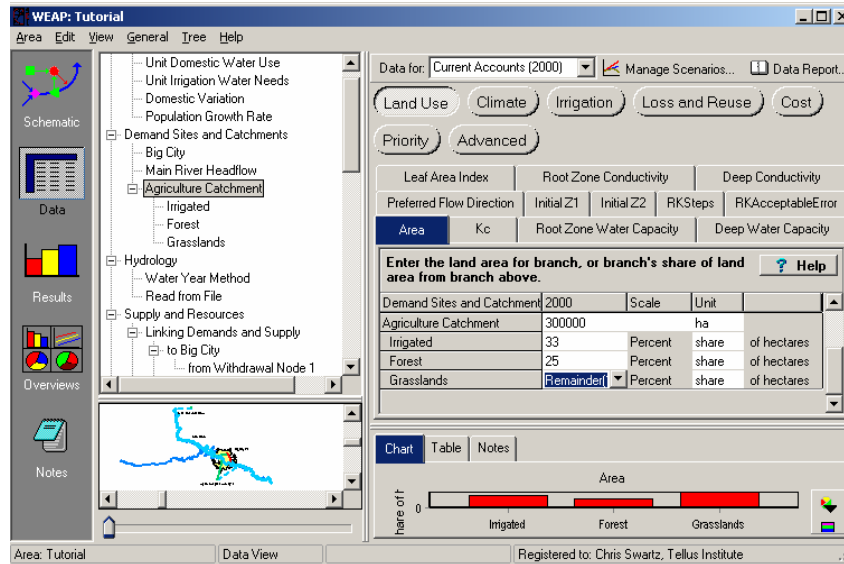

The Rainfall Runoff (soil moisture model) method has been developed to provide a simple yet realistic way of modeling hydrological processes with a semi-physical representation. Details about the method and its parameters, as well as calibration procedures, can be found in the appendix to this tutorial as well as in articles posted to the “publication” section of WEAP’s website ([www.weap21.org](http://www.weap21.org)). The related WEAP help topic provides a description of each parameter and an overview of the model as well. The parameter values displayed above are for illustration purposes only.

## 5. Enter the Appropriate Climate Data

In the same view as in the previous step, select the “Climate” screen and enter the following data:

<i>Precipitation</i>	<i>Use the same values as input for the Main River Headflow catchment in the previous exercise.</i>
<i>Temperature</i>	<i>MonthlyValues( Jan, 9, Feb, 12, Mar, 16, Apr, 21, May, 24, Jun, 27, Jul, 29, Aug, 29, Sep, 27, Oct, 22, Nov, 16, Dec, 11 )</i>
<i>Humidity</i>	<i>65%</i>
<i>Wind</i>	<i>1m/s</i>
<i>Latitude</i>	<i>30°</i>




Data about snow coverage are not needed if the basin is not exposed to snow. WEAP determines the appearance of snow based on the temperature and the melting and freezing points parameters. If the last two are left empty, no snow will be allowed to accumulate.

## 6. Set up Irrigated Areas

In the same view as in the previous step, select the “Irrigation” screen and enter the following data:

	<i>Irrigated</i>	<i>Forest</i>	<i>Grasslands</i>
<i>Irrigated Area</i>	100%	0%	0%
<i>Lower Threshold</i>	45%		
<i>Upper Threshold</i>	55%		

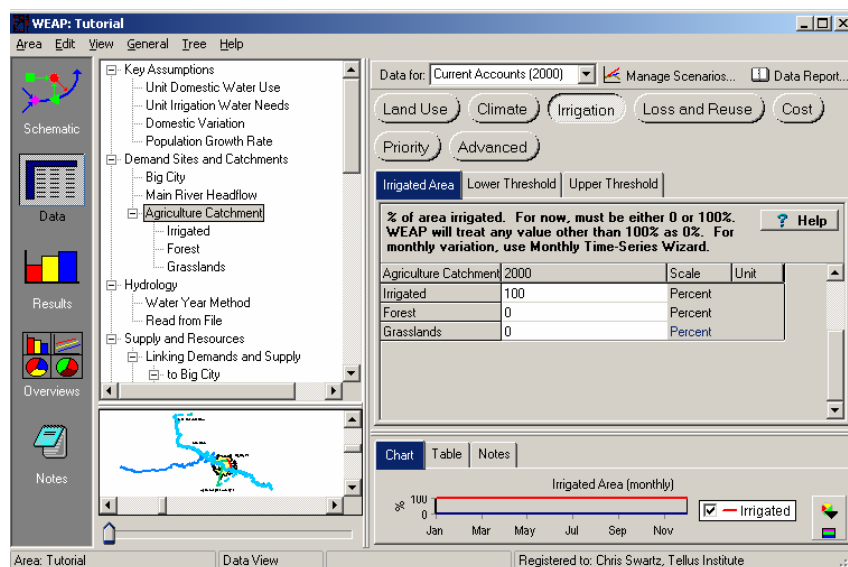


## 7. Look at Results



Look at the following results. Here again, the results are located in the “Catchment” category of the “Results” view. Select “Land Class Inflows and Outflows” under the primary variable pull-down menu. Select “All Srcs/Dests” (short for “All Sources and Destinations”) from the pull-down menu above the chart legend. To view the “Irrigated” segment of the Agriculture catchment, select “Branch: Demand Sites and Catchments \ Agriculture Catchment \ Irrigated” from the pull-down menu to the upper left of the chart. Choose the year 2000 from the “Selected Years”

option using the pull-down menu at the bottom, and click on “Monthly Average” at the upper far right.

*“Land Class Inflows and Outflows” represents in a very detailed manner the water balance for each land use class. You should obtain a graph similar to the figure below for the “Irrigated” land class inflows and outflows graph:*

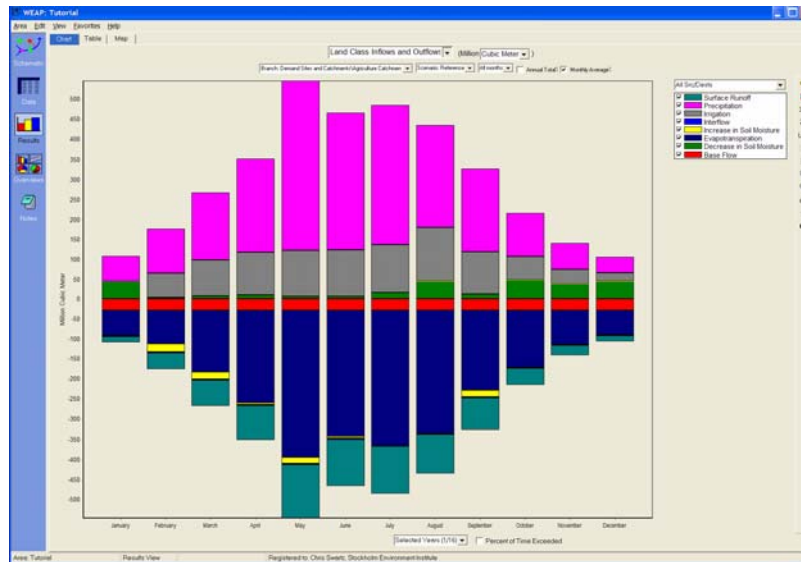

*You can also look at such parameters as “Soil Moisture in the upper bucket”(Relative Soil Moisture 1 (%)), or “Flow to River Full Irrigation”, which displays the water flowing to the river, including the irrigation water in excess.*

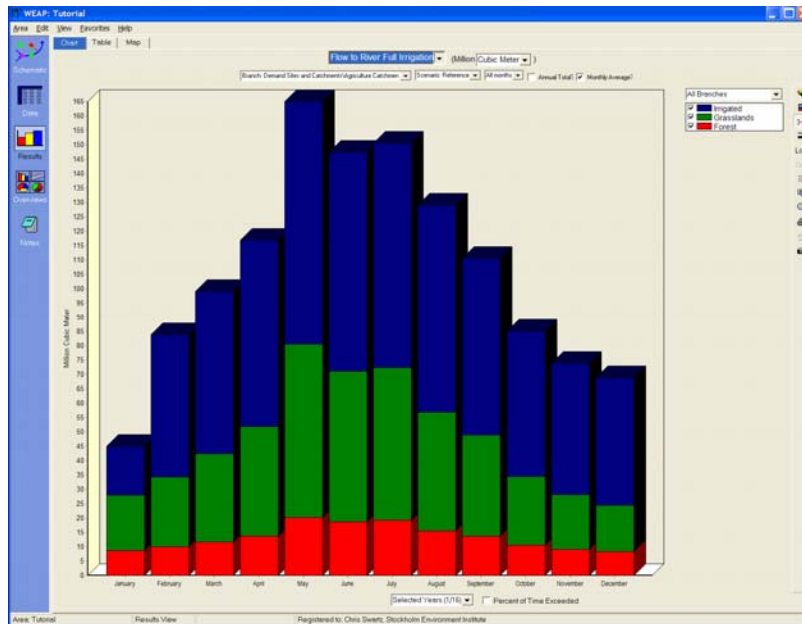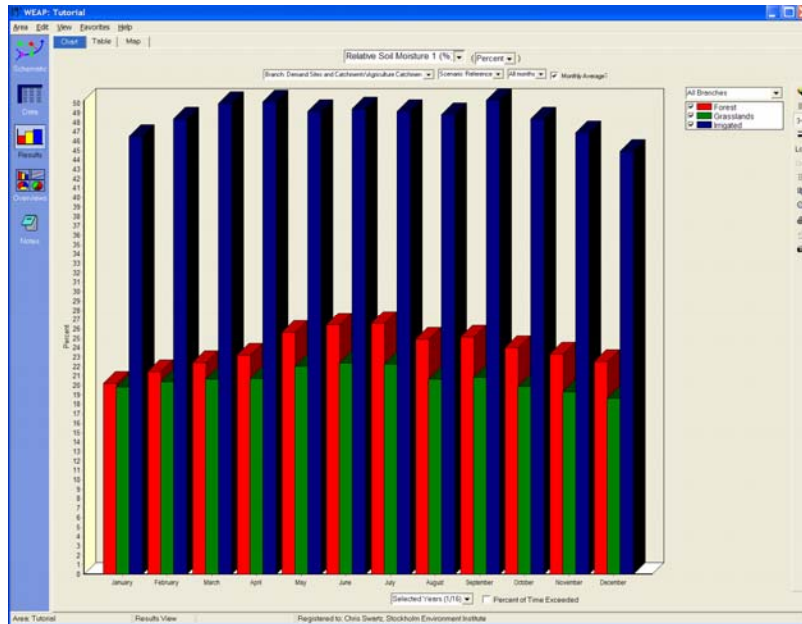


As you can see from the series of graphs, irrigation happens largely from February to October. Soil Moisture in the first bucket is rather constant at 45% to 50% throughout the year in the irrigated land class, which is consistent with the lower threshold we set. The largest contribution of flow from the catchment to the river is from the irrigated land class.

# Simulating Surface Water-Groundwater Interaction

## 1. Create a Groundwater Object

Create a new “Groundwater” node.

*Locate this Groundwater object next to the Agriculture Catchment that you created in the previous exercise. Name it “Agriculture Groundwater”.*

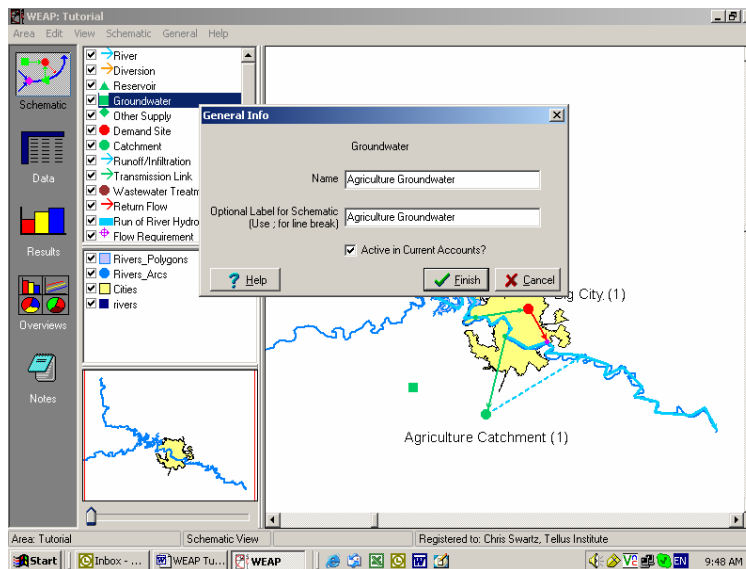

## 2. Connect the Groundwater Object to a Catchment


Create the following connections:

*Transmission Link from Agriculture Groundwater to Agriculture Catchment (Supply Preference 1)*

*Infiltration/Runoff Link from Agriculture Catchment to Agriculture Groundwater.*

*Your model should look similar to the one below:*




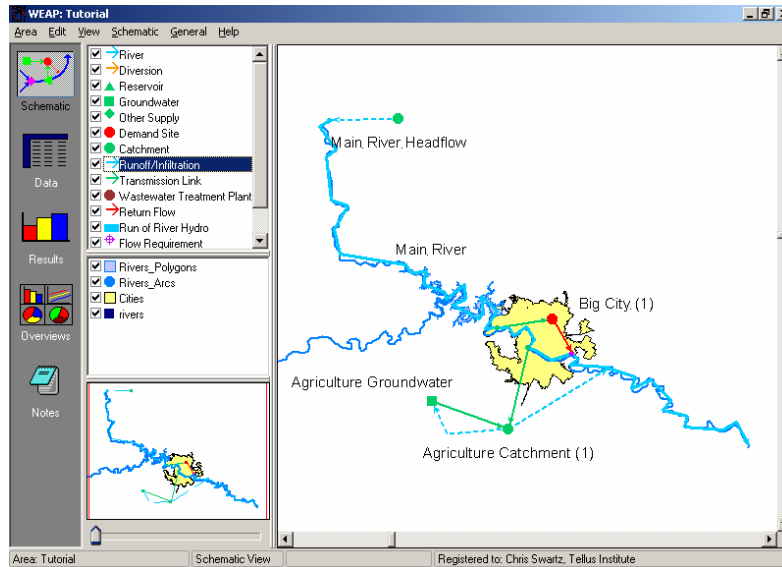

You can also create the Infiltration/Runoff Link between the catchment and the groundwater node by right-clicking the catchment in the Schematic View, selecting “General Info” and then choosing the groundwater field in the “Infiltration to” drop-down menu.


### 3. Enter the Appropriate Data

In the Data View, select Agriculture Groundwater, switch to the “Physical” screen and select the “Model GW-SW flows” method from the “Method” tab.

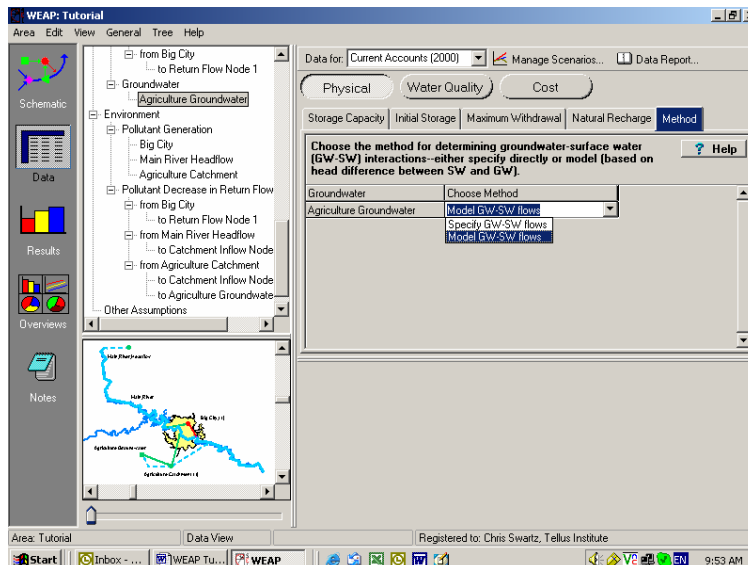

Switch to the “Water Quality” window and then back to the “Physical” window for the change to take effect (you will now see several new tabs in the “Physical” window). Enter the following data (leave blank if nothing is specified) under the appropriate tabs:

<i>Initial storage</i>	<i>50M m<sup>3</sup></i>
<i>Hydraulic Conductivity</i>	<i>10m/day</i>
<i>Specific Yield</i>	<i>0.1</i>
<i>Horizontal Distance</i>	<i>5000m (the extent of the aquifer perpendicular to the river )</i>
<i>Wetted Depth</i>	<i>5m</i>
<i>Storage at River Level</i>	<i>50Mm<sup>3</sup></i>

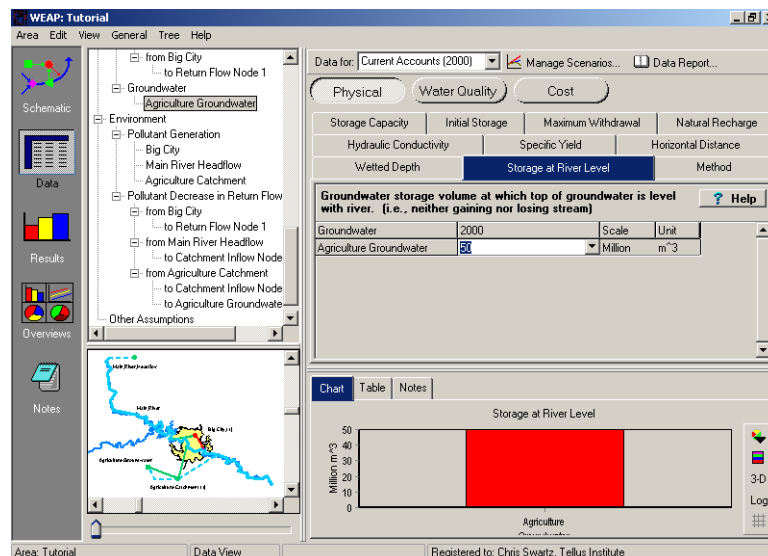


#### 4. Select the Reaches that Interact with the Aquifer

In the Data View’s tree, expand all the reaches of the Main River by clicking on the “+” icon next to it in the “Supply and Resources \ River” branch. Select the reach that is below the return flow node from Big City (Return Flow Node 1; you might have to switch to the Schematic view and right-click on the nodes to find the name of that node in your model). Then enter the following data in the “Reach Length” tab for this reach:


*From Groundwater*

*Select Agriculture Groundwater*

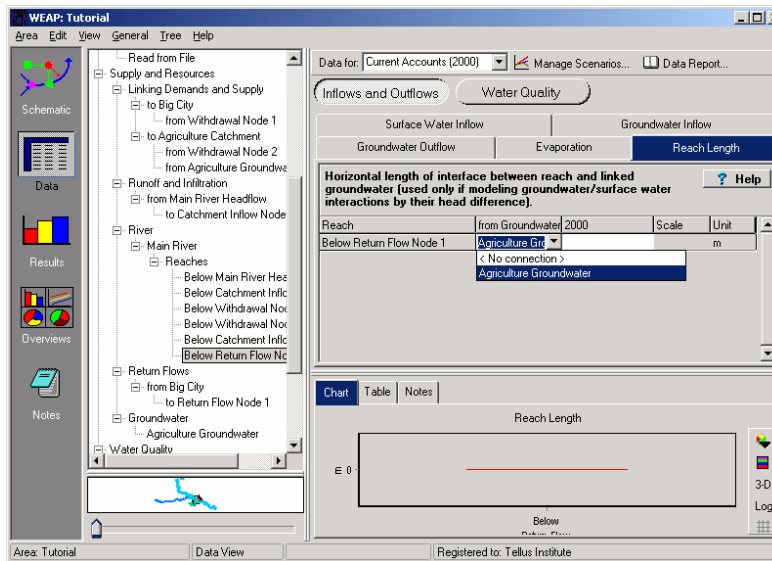


*Reach Length*

*30,000 m*

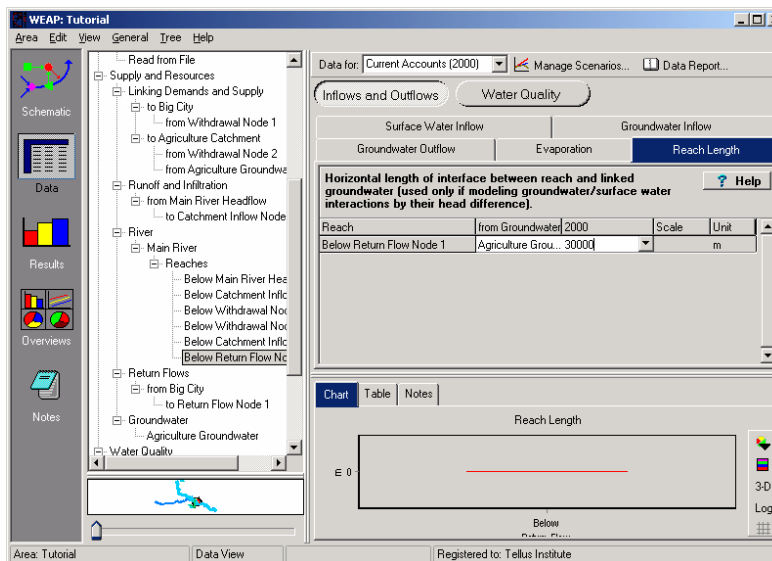

## 5. Look at the Results

Look at the “Demand Site Inflows and Outflows” for the Agriculture catchment, and select “All Srcs/Dests” (all sources and destinations) for the year 2000. Click on “Monthly Average”.

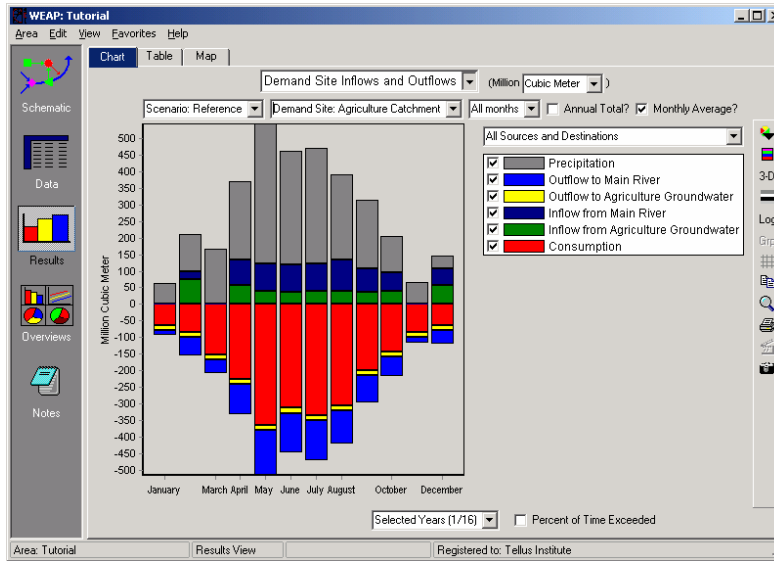

Note that these results include “Inflow from Agriculture Groundwater” (due to the designation of the Agriculture Groundwater node as a source to supply irrigation water for the Agriculture Catchment) and “Outflow to Agriculture Groundwater” (due to the creation of a runoff/infiltration link between the two nodes).


Look also at “Groundwater Inflows and Outflows” (under Supply and Resources\Groundwater) for the year 2000 (monthly averages).





Note that the “Inflow from Upstream” category indicates infiltration of Main River water to Agriculture Groundwater along the river reach you selected earlier. Likewise, “Outflow to Downstream” represents groundwater seepage into the Main River.

Look also at the height of groundwater above the river stage. This can be viewed by selecting “Supply and Resources\Groundwater\Height Above River” from the primary variable pull-down menu. Choose “Agriculture Groundwater” from the “Selected Aquifers” option in the pull-down menu above the chart legend.

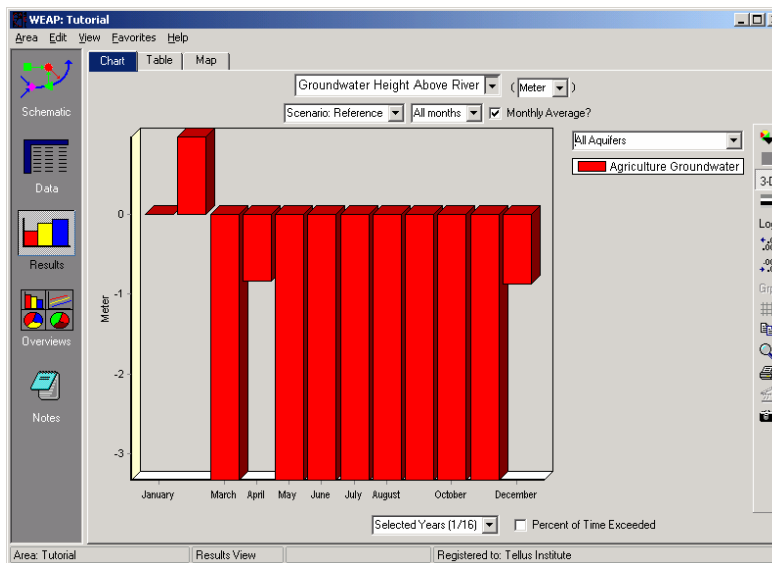

Note that in the month where groundwater seepage to the Main River occurs (February), the groundwater elevation is higher than the wetted depth of the river as designated in the data (i.e., the difference in elevations is positive). Likewise, when Main River infiltration to groundwater is occurring, the elevation difference is negative.



---

# WEAP

Water Evaluation And Planning System

# Financial Analysis

## *A TUTORIAL ON*

*Setting up the Cost and Revenue Model .....184*

*Modeling Cost.....186*

*Modeling Revenue .....192*

November 2005



**SEI** STOCKHOLM  
ENVIRONMENT  
INSTITUTE

Boston Center, Tellus Institute, 11 Arlington Street, Boston, MA 02116 USA  
Tel: (617) 266 8090 Fax: (617) 266 8303 Email: [weap@tellus.org](mailto:weap@tellus.org) Web: <http://www.seib.org/weap>

**Note:**

For this module you will need to have completed the previous modules (“WEAP in One Hour, Basic Tools, and Scenarios) or have a fair knowledge of WEAP (data structure, Key Assumptions, Expression Builder, creating scenarios). To begin this module, go to the Main Menu, select “Revert to Version” and choose the version named “Starting Point for all modules after ‘Scenarios’ module.”

## Setting up the Cost and Revenue Model

### 1. Understanding Cost and Revenue Modeling in WEAP

WEAP models three types of costs: Capital Costs, Fixed Operation & Maintenance (O&M) Costs, and Variable O&M Costs. It also models three types of revenues: fixed revenues, variable revenues and electricity revenues. Costs and Revenues can be assigned to any object (e.g., a demand site, river reach, groundwater node, reservoir or hydropower plant).


*For more information on Cost and Revenues, refer to the “Entering Item Cost and Revenues” topic in Help.*

### 2. Setting the Discount Rate

In the “General”, “Units” menu, select the “Monetary” tab and enter the Discount Rate.

*Discount Rate      7%*



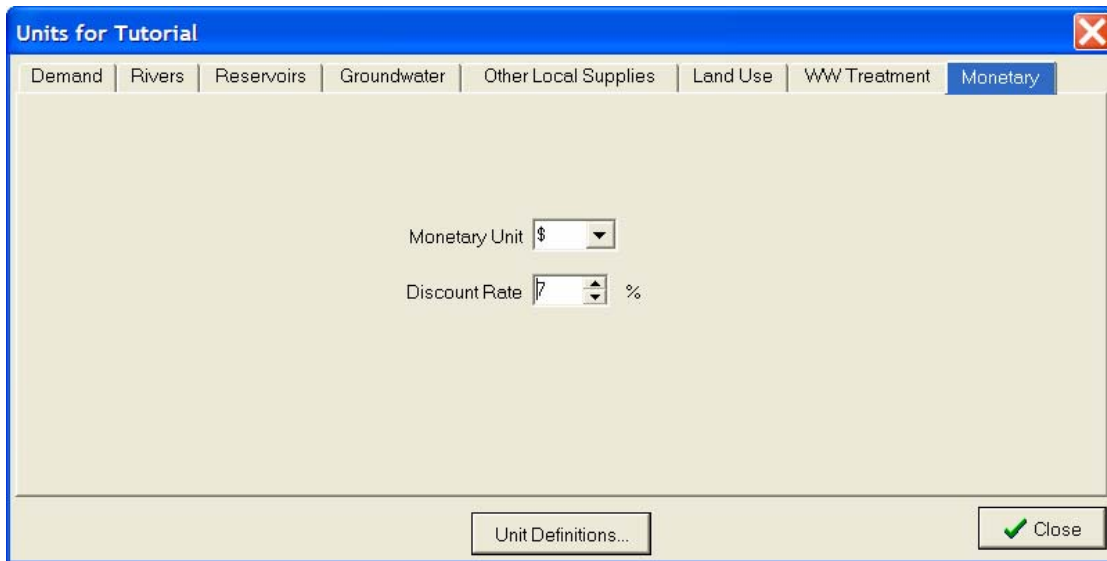

The Discount Rate is used to compute net present value and accrue monetary quantities over time. It is different from the interest rate, which must be entered manually for each loan payment computation.



One needs to decide upfront whether the analysis will be done in real or in nominal dollars (with or without considering inflation) since this will have an effect on the discount rate, interest rates and cost & revenue growth.

Determination of the Discount Rate is an important matter in economic analyses. Guidelines exist that are based on different methods such as the Weighted Average Cost of Capital (WACC) or Capital Asset Pricing Model (CAP-M). The US government currently recommends a discount rate of 7% for public sector projects (including inflation).

### 3. Changing the Modeling Duration

Cost modeling makes sense mainly if a long time period is being considered. Extend the time period being simulated in WEAP by opening the "General", "Years and Time Steps" dialog box. Change the "Last Year of Scenarios" variable:

*Last Year of Scenarios*      2025

**Years and Time Steps**

Time Horizon  
 Current Accounts Year: 2000  
 Last Year of Scenarios: 2025

Time Steps per Year  
 12

Time Step Boundary  
 Based on calendar month  
 All time steps are equal length  
 Set time step length manually

Water Year Start  
 January

The study period will run from January, 2000 to December, 2025.

#	Title	Abbrev.	Length	Begins	Ends
1	January	Jan	31	Jan 1	Jan 31
2	February	Feb	28	Feb 1	Feb 28
3	March	Mar	31	Mar 1	Mar 31
4	April	Apr	30	Apr 1	Apr 30
5	May	May	31	May 1	May 31
6	June	Jun	30	Jun 1	Jun 30
7	July	Jul	31	Jul 1	Jul 31
8	August	Aug	31	Aug 1	Aug 31
9	September	Sep	30	Sep 1	Sep 30
10	October	Oct	31	Oct 1	Oct 31
11	November	Nov	30	Nov 1	Nov 30
12	December	Dec	31	Dec 1	Dec 31

? Help Close



Changing the “Last Year of Scenarios” will not affect the “Current Accounts”, the base year for all scenarios. It will only affect all the scenarios, including the “Reference” scenario. For more details about WEAP and scenarios, refer to the “Scenarios” module of the tutorial.



## Modeling Cost

### 1. Enter Demand Site Cost Data


For the Big City demand site, enter the following data (in Current Accounts) in the “Demand Sites” branch of the data tree in the Data view. Click on the “Cost” button and enter under the “Capital Costs” tab:

*Capital Costs* *a loan of 120M\$, occurring in 2000, payback period 15 years, interest rate 5%*

*Use the Expression Builder to select the built-in function “LoanPayment”; pull this function into the expression window and type in the parameters 120000000, 2000, 15, 5% within the parentheses. The expression should look like: “LoanPayment(120000000,2000,15,5%)”*

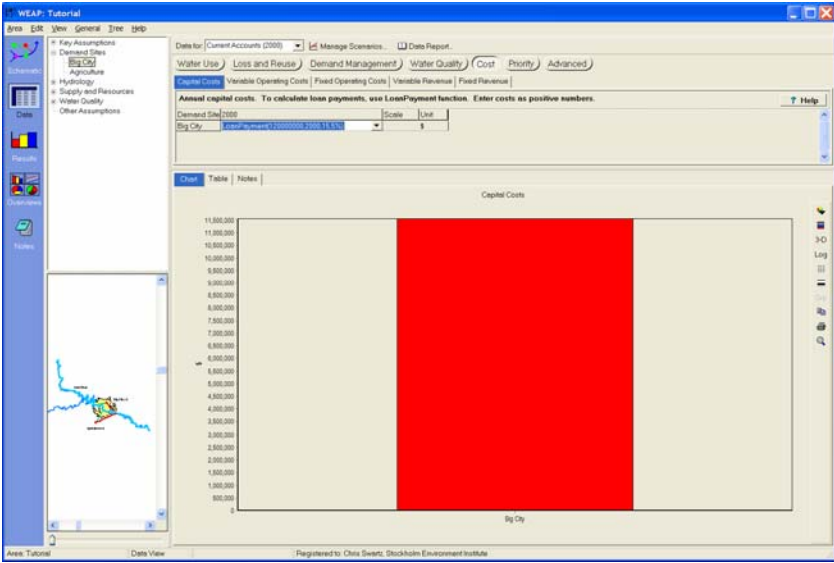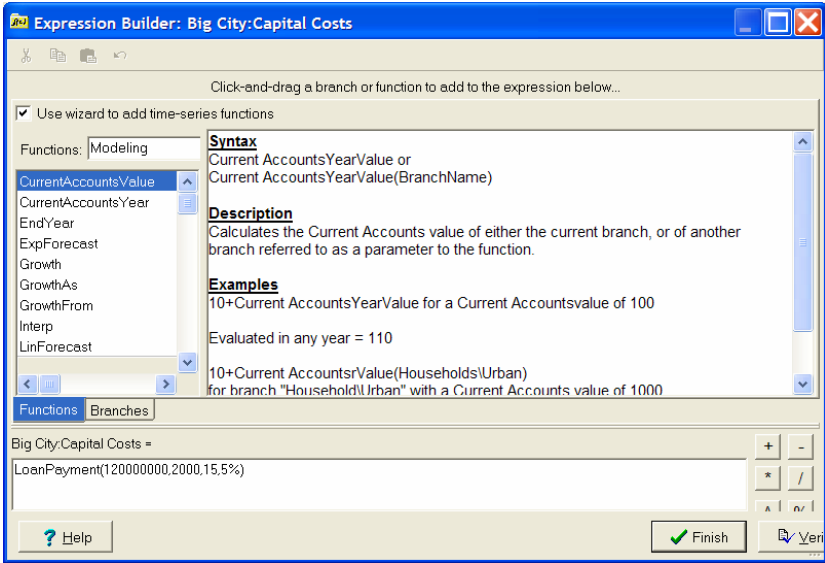


*Variable Operating Costs*                      *0.12\$/m<sup>3</sup>*

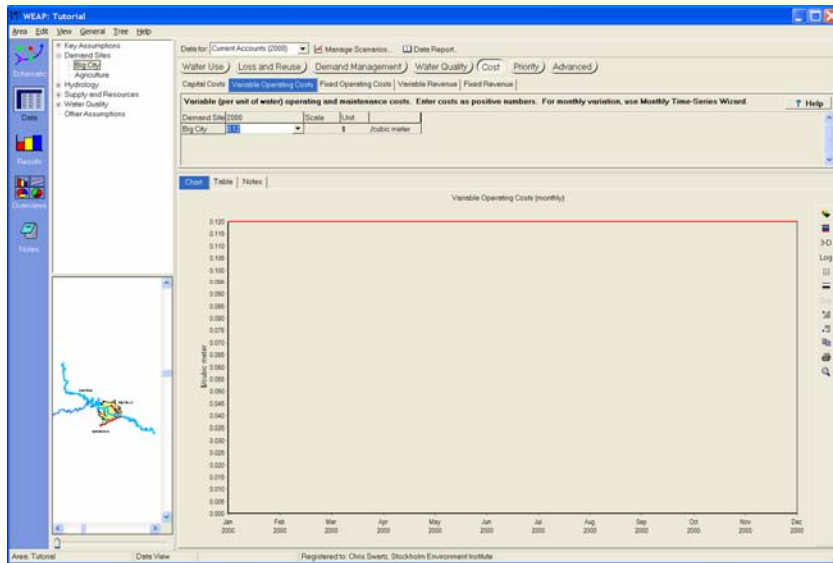

*Fixed Operating Costs*                      *a yearly value of 5M\$, growing at a 3% rate starting in 1995*

*Use the Expression Builder again, selecting the built-in function "GrowthFrom" and entering the corresponding parameters in the parentheses. The formula should read: "GrowthFrom(3%,1995,5000000)"*

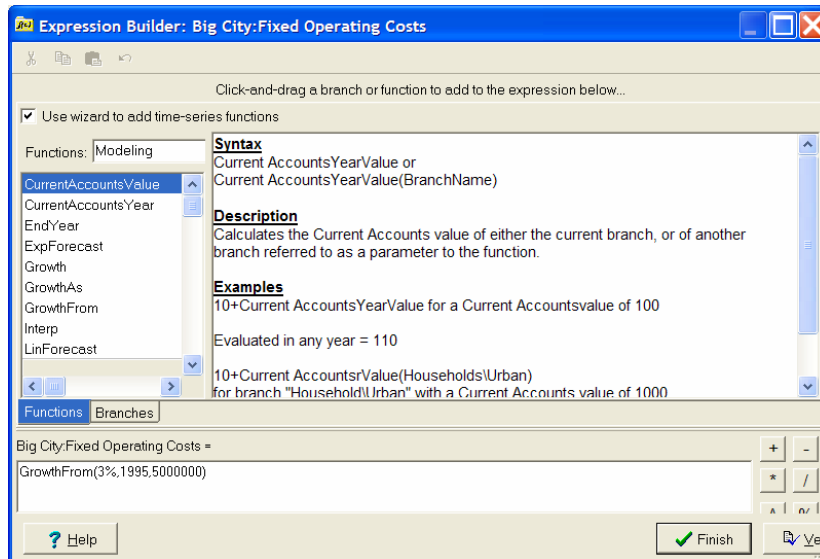


## 2. Enter System-Wide Cost Data

We'll assume that there was a loan made in years earlier than the Current Account (base) year which is still being paid back. We'll assign this cost to the entire system, rather than to a specific object. Enter the following data in the "Supply and Resources" branch of the data tree in the Data view.

*Capital Costs*                      *a loan of 300M\$, occurring in 1989, payback period 20 years, interest rate 6%*

*Again, use the Expression Builder and the "LoanPayment" function. The formula should read "LoanPayment(300000000,1989,20,6%)"*

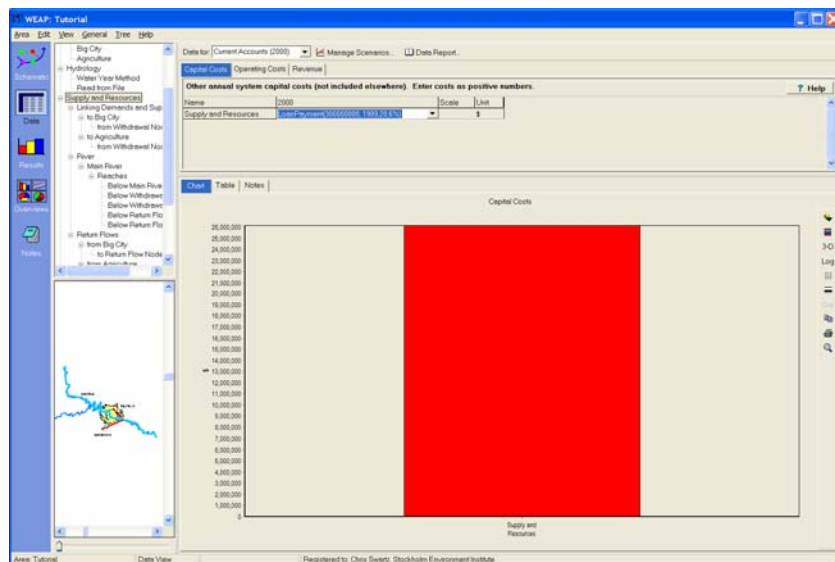

## 3. Evaluate Results




Run the model and look at the following results:


*Financial/Net Cost:*

*What is the difference between real and discounted dollar values for the Big City?*

*Select "Financial \ Net Cost" from the primary variable pull-down menu and choose Big City from the list of items in the menu to the upper left of the chart. Select "Capital Cost" from the upper right menu. Make sure the "Reference" scenario is selected from the menu above the chart legend. Toggle between the*

“Real” and “Discounted” options using the menu just to the left of the unit menu (set at U.S. dollars).

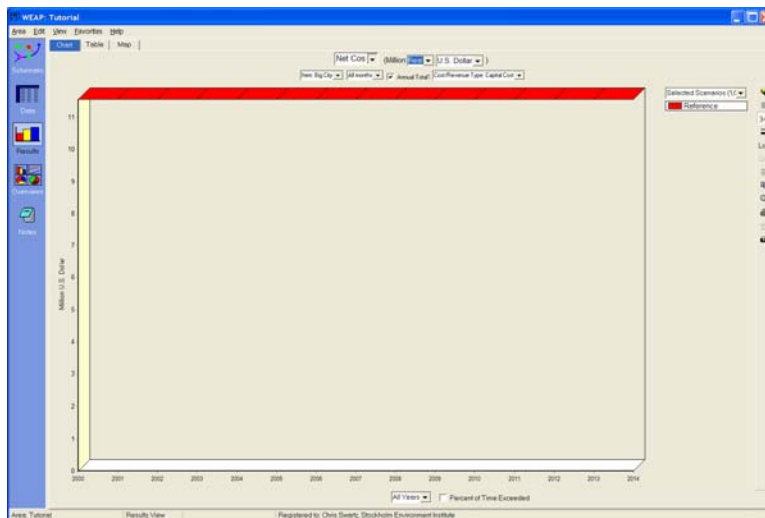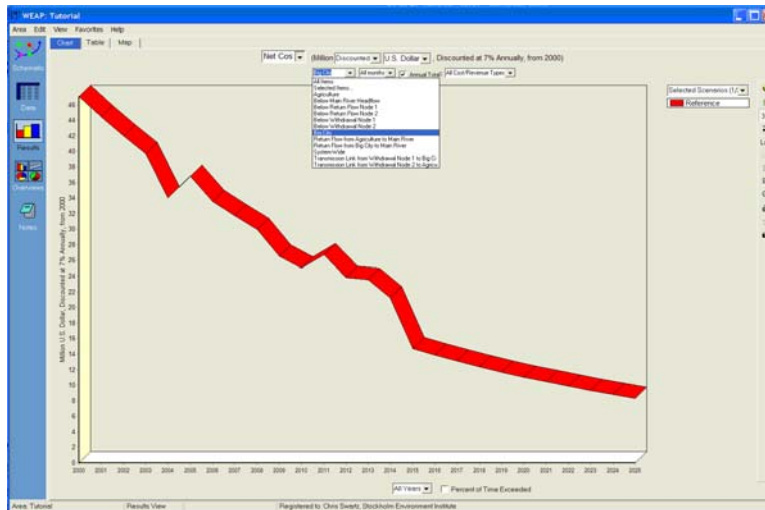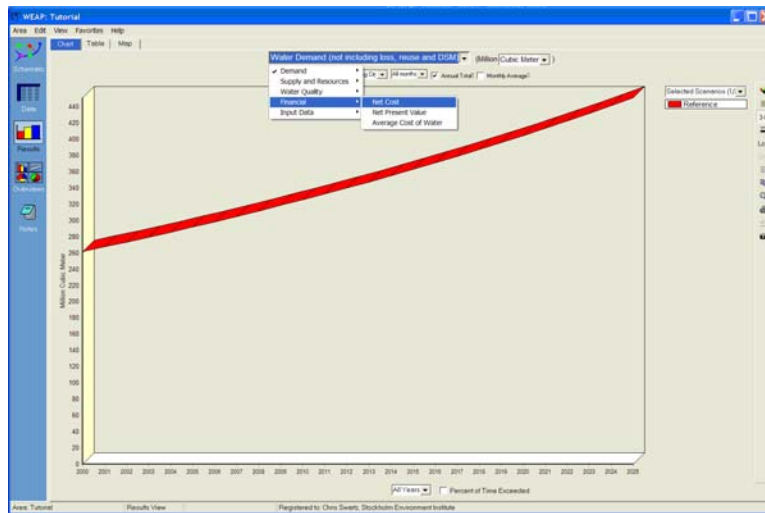

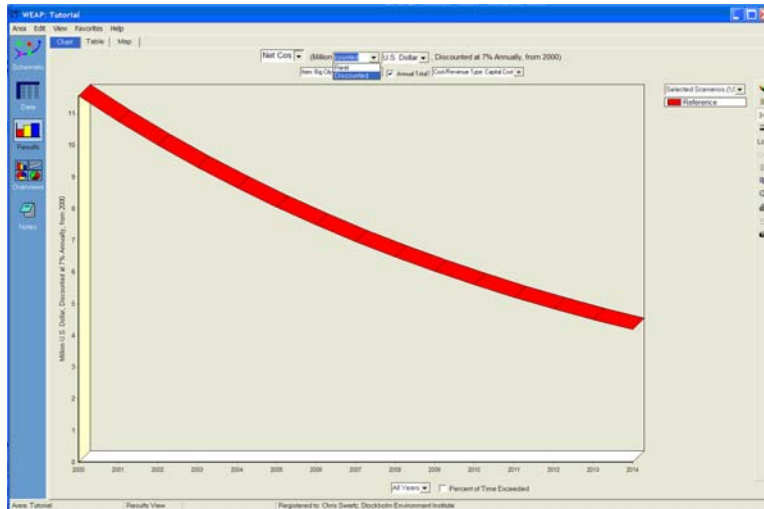



While real dollar are actual dollar values, discounted dollar values have been brought back to their present value using the discount rate. The further in the future the cost occurs, the lower its present value.

### Average Cost of Water

*What makes the cost vary on a monthly basis? On an annual basis?*

Select "Financial \ Average Cost of Water" from the primary variable pull-down menu. Keep the "Reference" scenario selected and click on "Monthly Average". You should have a chart like the one below:

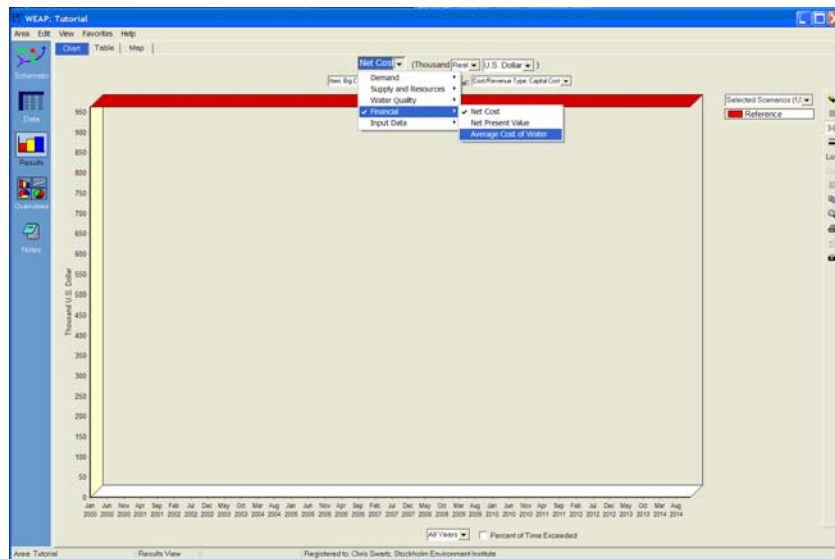

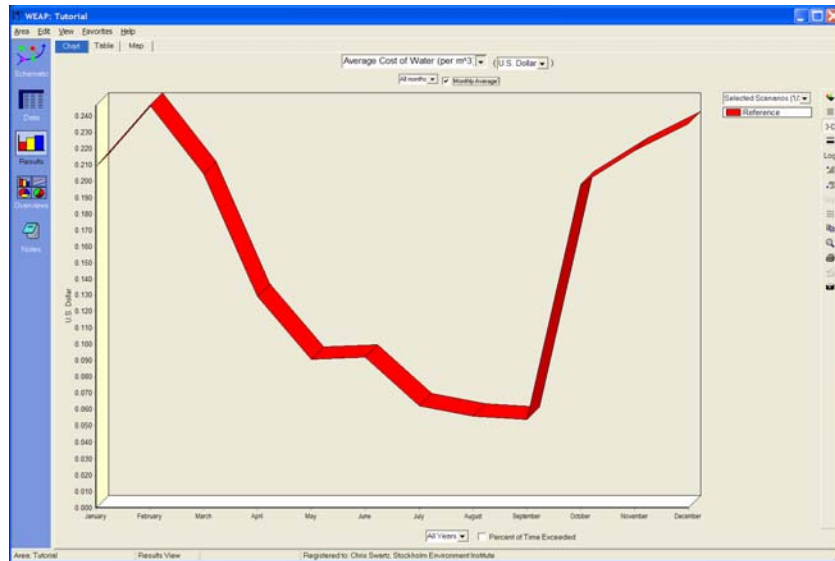

Monthly variations in average cost of water occur because of the largely varying consumption of water (especially in the Agriculture area), while fixed costs remain constant. Annual variations are mainly driven by changes in the capital costs (loans are paid back, new loans occur).


## Modeling Revenue

### 1. Enter Demand Site Revenue

In the “Cost” screen of the Big City Demand Site (Data View), enter the following data, which could, for example, correspond to the price water is sold for.

*Variable Revenue*                       $0.26\$/m^3$



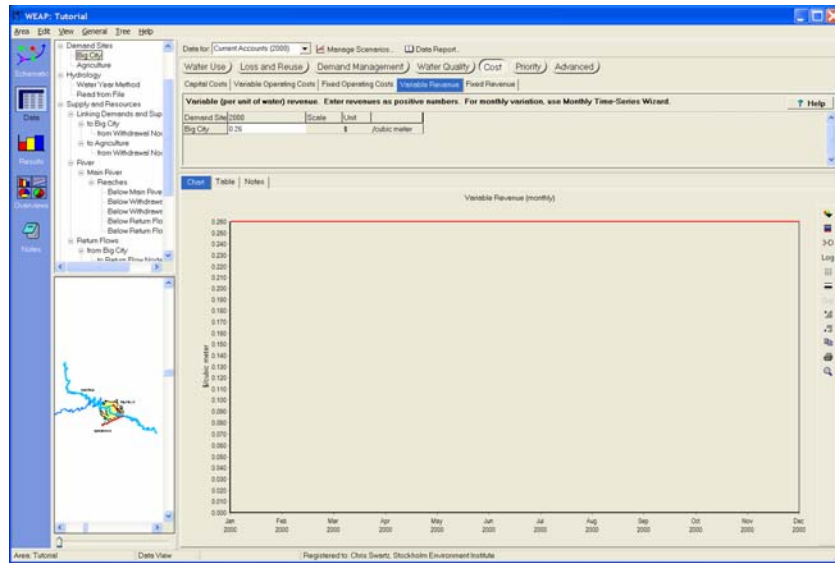


When modeling hydropower reservoirs (refer to the “Reservoir and Hydropower” WEAP tutorial module), one can also enter revenues from electricity generation. The related data-entry tab exists only when pertinent.

## 2. Compare Net Present Cost and Revenue

Display the Net Present Value of the project.

*How do the Net Present Value of the Costs compare to the Net Present Value of the Revenues?*

*Select “Financial \ Net Present Value” from the primary variable pull-down menu, and choose Big City as the item for viewing. You should have a chart like the one below:*

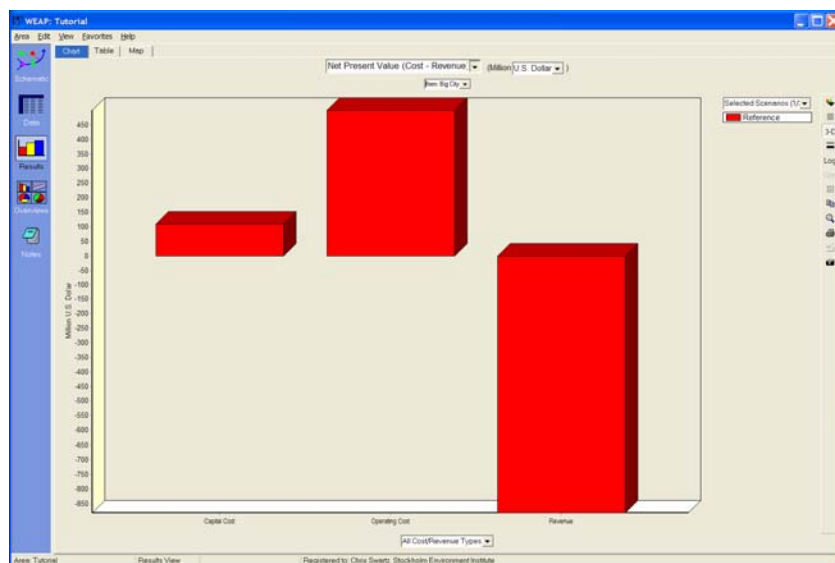

*What does that comparison tell you?*



The Net Present Value of the costs can be compared to that of the revenue to obtain a sense of the economic viability of the system. If the NPV of the costs exceeds the NPV of the revenues, then the system is returning a lower profit than average projects (as defined by the discount rate). If the NPV of the revenues exceed that of the costs, then the systems is generating a profit higher than average projects.

---