





Ministry of Environment,  
Forest and Water Administration



U N  
D P  
*Albania*

United Nations  
Development Programme

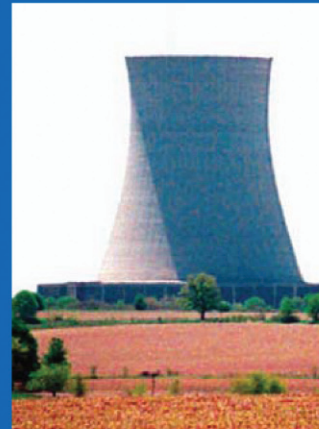

# ALBANIA'S TECHNOLOGY NEEDS ASSESSMENT

**Publisher:**

Ministry of Environment, Forest and Water Administration of Albania

**Graphic Design:**

Petrit Pema

Odeta Zheku

**Printed by:**

Publishing and printing house “ILAR”

Tirana, Albania

This report is available at

[www.ccalb.org](http://www.ccalb.org)  
[www.unfccc.int](http://www.unfccc.int)

**DECEMBER 2005**



# Preface

Albania's involvement in the United Nations Framework Convention on Climate Change (UNFCCC) commenced in 1995 when the Government of Albania ratified the Convention, therefore becoming a Non-Annex I Party to the UNFCCC.

The First National Communication, launched in September 2002 as the first accomplishment of Albania under the UNFCCC enabled through the assistance of Global Environmental Facility, shows that Albania is a relatively low net emitter of greenhouse gases with a moderate degree of vulnerability to the expected climate changes. However, future scenarios predict higher levels and growth rates of these emissions and negative impacts of expected climate changes if no mitigation and adaptation actions are undertaken now.

The Albania's Technology Needs Assessment Report explores country needs for the reduction of greenhouse gas emissions and adaptation technologies. It also re-affirms the will of the Government of Albania along with the international community to contribute to the joint efforts in addressing the climate change threat. Addressing the environmental concerns along with climate change ones into the Albania's Government adopted National Strategy for Socio-Economic Development (NSSD) which focuses on poverty reduction through sustainable and inclusive economic growth, indicates sensitivity and political will to move towards the Sustainable Development pathways. Further to that, the National Energy Strategy adopted in 2002 as part of the NSSD that explicitly addresses and takes into consideration climate changes and other environmental concerns, demonstrates a good example of the fruitful cooperation among national institutions.

The technology needs assessed through out this report will serve as a platform towards the climate friendly technology transfer to Albania, paving the way to the reduction of country's energy shortage and to less carbon intensive paths of development.



**Prof. Dr. Lufter Xhuveli**  
*Minister of Environment, Forest and Water Administration*  
*Albania*



# Acknowledgements

The Technology Needs Assessment for Albania is the main output delivered under the phase II of Climate Change Enabling Activities funded by UNDP – GEF, which has followed the Project: “Enabling Albania to prepare its First National Communication in Response to its Commitments under the UNFCCC”.

The report was developed under the coordination of Mrs. Ermira FIDA, – National Manager of UNDP-GEF Climate Change Program and Mr. Besnik Baraj, in his capacity as National Director of this Program. They both extend their thanks and appreciation to the Ministry of Environment of Albania and UNDP Albania that both supported this exercise respectively as Executing and Implementing Agencies of the project. Special thanks go to the UNFCCC Secretariat and UNDP-GEF National Communication Support Program for their support provided.



# ALBANIA'S TECHNOLOGY NEEDS ASSESSMENT

## **Coordinated by:**

Ermira Fida, MBA  
Besnik Baraj, PhD

## **Lead Authors:**

Ermira Fida, MBA  
Mirela Kamberi, Msc  
Eglantina Demiraj, PhD  
Besim Islami, PhD

## **Contributing authors:**

Spiro Karadumi, PhD  
Agron Jana,  
Edmond Panariti, PhD  
Pranvera Bekteshi, PhD  
Vangjel Mustaqi, PhD  
Liri Mucaj, PhD  
Miriam Bogdani, PhD  
Bajram Mejdiaj, PhD  
Agim Shehi, PhD  
Sabri Laci, PhD

## **Review Editors**

Irena Wosk - CANADA  
Marina Shvangiradze - GEORGIA  
Klodiana Marikaj - ALBANIA

## **Language Review Editor**

Tomi Xhillari  
Melita Leka  
Odeta Zheku

# ACRONYMS

ARMO	Albania Refinery Marketing of Oil Company
CEE	Central East Europe
CEEC	Central and Eastern European Countries
CHP	Combined Heat and Power
CoP	Conference of the Parties
CSP	Continuous Seismic Profilers
CZMP	Coastal Zone Management Plan
DGFP	General Directorate of Forests and Pastures
DH	District Heating
DHW	Domestic Hot Water
DSU	Data Storage Unit
E.S	Echo-Sounder
EEC	Energy Efficiency Center
ERE	Energy Regulatory Entity
EU	European Union
FAO	Food and Agriculture Organization
FNC	First National Communication
GDP	Gross Domestic Production
GEF	Global Environment Facility
GHG	Greenhouse Gas
GIS	Geographical Information System
HOB	Heat only Boilers
HPP	Hydro Power Plant
IHM	Institute of Hydro Meteorology
IPCC	Intergovernmental Panel on Climate Change
KESH	Albania's Electro-Energy Corporation
LEAP	Long-range Energy Alternatives Planning
LPG	Liquefied Petroleum Gas
LUCF	Land Use Change and Forestry
MAP	Mediterranean Action Plan
MDGs	Millennium Development Goals
MoE	Ministry of Environment
MSW	Municipal Solid Waste
NAE	National Agency of Energy
NEAP	National Environmental Action Plan
NGOs	Non-Governmental Organizations
NHM	National Hydrological Network
NSSED	National Strategy for Socio-Economic Development
PV	Photo Voltaic
R&D	Research and Development
REA	Regional Environmental Agency
SAA	Stabilization and Association Agreement
SERVECOM	Service of Oil Companies
SMEs	Small and Medium Enterprises
SSCHP	Small Scale Combined Heat and Power
TNA	Technology Needs Assessment
TPP	Thermo Power Plant
UCTE	Union of Central Transmission of Electricity
UNDP	United Nations Development Program
WWT	Waste Water Treatment

# TABLE OF CONTENTS

<b>INTRODUCTION</b>	14
i. ALBANIA'S DEVELOPMENT CONTEXT	14
ii. ENVIRONMENTAL CONTEXT	15
iii. UNFCCC CONTEXT ON TECHNOLOGY TRANSFER	17
iv. WHAT IS THE TECHNOLOGY NEEDS ASSESSMENT	19
v. TECHNOLOGY NEEDS ASSESSMENT EXERCISE IN ALBANIA	19
vi. STRUCTURE OF THE REPORT	23
 <b>CHAPTER I</b>	 25
<b>TECHNOLOGY NEEDS ASSESSMENT FOR ABATEMENT OF GREENHOUSE GAS EMISSIONS</b>	25
<b>INTRODUCTION</b>	26
<b>I. ENERGY SECTOR</b>	27
I.1 OVERVIEW OF OPTIONS AND RESOURCES	27
I.1.1 Sector profile	27
I.1.1.1 Energy consumption	27
I.1.1.2 Energy resources	29
I.1.1.2.1 Oil	29
I.1.1.2.2 Natural gas	31
I.1.1.2.3 Coal	32
I.1.1.2.4 Hydro energy	34
I.1.1.2.5 Biomass	35
I.1.1.2.6 Solar energy	35
I.1.1.2.7 Wind energy	36
I.1.1.2.8 Solid wastes	37
I.1.1.2.9 Geothermal energy	38
I.1.1.3 Energy supply and production	39
I.1.1.3.1 Albanian power sector situation	39
I.1.2 Policy and legal framework	40
I.1.2.1 Policy framework	40
I.1.2.2 Legal framework	46
I.1.2.2.1 Energy Legislation	46
I.1.2.2.2 Foreign investments legislation	47
I.1.3 Overview of the work done under the Albania's First National Communication	47
I.1.4 Take the stock of technologies currently in use	50
I.1.4.1 Hydro power plants	51
I.1.4.2 Thermal power plants	53
I.1.4.3 Solar energy	55
I.1.4.4 Power transmission system	56
I.1.4.5 Distribution networks, rehabilitation and upgrading program	57
I.1.4.5.1 Lines	57
I.1.4.5.2 Distribution	57
I.1.4.6 Energy technologies in household/service sectors	57
I.1.4.7 Energy technologies in transport sector	59
I.1.4.8 Energy consumption industries	61



# TABLE OF CONTENTS

I.2 CRITERIA FOR ASSESSMENT	62
I.3 SELECTION OF KEY TECHNOLOGIES	63
I.4 IDENTIFICATION OF EXISTING BARRIERS AND POLICY NEEDS	64
I.5 SELECTION OF ACTIONS	65
<b>II. LAND USE CHANGE AND FORESTRY SECTOR</b>	66
II.1 OVERVIEW OF OPTIONS AND RESOURCES	66
II.1.1 Sector profile	66
II.1.2 Policy and legal framework	69
II.1.2.1 Policy framework	69
II.1.2.2 Legal framework	70
II.1.3 Overview of the work done under the Albania's First National Communication	71
II.1.4 Take the stock of technologies currently in use	73
II.2 IDENTIFY CRITERIA FOR ASSESSMENT	74
II.3 SELECTION OF KEY TECHNOLOGIES	74
II.4 IDENTIFICATION OF EXISTING BARRIERS AND POLICY NEEDS	75
II.5 DEFINE AND SELECT ACTIONS	76
<b>III. AGRICULTURE</b>	78
III.1 OVERVIEW OF OPTIONS AND RESOURCES	78
III.1.1 Sector profile	78
III.1.2 Policy and legal framework	79
III.1.2.1 Policy framework	79
III.1.2.2 Legal framework	80
III.1.3 Overview of the work done under the Albania's First National Communication	81
III.1.4 Take the stock of technologies currently in use	82
III.2 IDENTIFY CRITERIA FOR ASSESSMENT	83
III.3 SELECTION OF KEY TECHNOLOGIES	83
III.4 IDENTIFICATION OF EXISTING BARRIERS AND POLICY NEEDS	85
III.5 DEFINE AND SELECT ACTIONS	86
<b>IV. WASTE</b>	87
IV.1 OVERVIEW OF OPTIONS AND RESOURCES	87
IV.1.1 Sector profile	87
IV.1.1.1 Introduction	87
IV.1.1.2 Urban solid wastes	87
IV.1.1.3 Industrial wastes	89
IV.1.1.4 Hospital wastes	90
IV.1.2 Policy and legal framework	90
IV.1.2.1 Policy framework	90
IV.1.2.2 Legal framework	91
IV.1.3 Overview of the work done under the Albania's First National Communication	92
IV.1.4 Take the stock of technologies currently in use	93
IV.2 IDENTIFY CRITERIA FOR ASSESSMENT	94

# TABLE OF CONTENTS

IV.3 SELECTION OF KEY TECHNOLOGIES	94
IV.4 IDENTIFICATION OF EXISTING BARRIERS AND POLICY NEEDS.	95
IV.5 DEFINE AND SELECT ACTIONS	96
<b>V. INDUSTRIAL PROCESSES</b>	97
V.1 OVERVIEW OF OPTIONS AND RESOURCES	97
V.1.1 Sector profile	97
V.1.1.1 Cement production	98
V.1.1.2 Lime production	98
V.1.1.3 Chromium production	99
V.1.1.4 Iron and steel	99
V.1.1.5 Copper production	100
V.1.1.6 Nitric acid production	100
V.1.2 Policy and legal framework	100
V.1.2.1 Policy framework	100
V.1.2.2 Legal framework	101
V.1.3 Overview of the work done under the Albania's First National Communication	102
V.1.4 Take the stock of technologies currently in use	103
V.1.4.1 Cement industry	103
V.1.4.2 Lime production	103
V.1.4.3 Chromium production	103
V.1.4.4 Iron and steel	104
V.1.4.5 Copper production	104
V.2 IDENTIFY CRITERIA FOR ASSESSMENT	104
V.3 SELECTION OF KEY TECHNOLOGIES	104
V.4 IDENTIFICATION OF EXISTING BARRIERS AND POLICY NEEDS	106
V.5 DEFINE AND SELECT ACTIONS	107
<b>CHAPTER II</b>	108
<b>TECHNOLOGY NEEDS ASSESSMENT FOR ADAPTATION TO CLIMATE CHANGES</b>	109
<b>INTRODUCTION</b>	109
<b>I. COASTAL AREA</b>	110
I.1 OVERVIEW OF OPTIONS AND RESOURCES	110
I.1.1 Profile of the coastal area	110
I.1.2 Coastal policy framework	111
I.1.3 Overview of the work done under the Albania's First National Communication	113
I.1.4 Take the stock of technologies currently in use	118
I.1.4.1 Climate	118
I.1.4.1.1 Alternative sources of energy	118
I.1.4.1.2 Air quality monitoring	119
I.1.4.1.3 Meteorological network	119
I.1.4.1.4 Hydrological network	120
I.1.4.1.5 Meteorological and hydrological data	

# TABLE OF CONTENTS

transmission	120
I.1.4.2 Water resources	121
I.1.4.2.1 Defense structures	121
I.1.4.3 Agriculture	122
I.1.4.3.1 Land management practices	122
I.1.4.3.2 Soil management practices	123
I.1.4.3.3 Planting management	123
I.1.4.4 Livestock	124
I.1.4.4.1 Farmhouse microclimate control	124
I.1.4.4.2 Disease prevention and control	124
I.1.4.5 Fishery	125
I.1.4.6 Forestry	125
I.1.4.6.1 Addressing climate change issues to forest development strategies	125
I.1.4.6.2 Increase of forest productivity	126
I.1.4.6.3 Reforestation techniques	126
I.1.4.7 Tourism, population	127
I.1.4.7.1 Physical planning	127
I.1.4.7.2 Drainage technique	127
I.1.4.7.3 Coastal erosion prevention	127
I.1.4.8 Health	128
I.2 IDENTIFY CRITERIA FOR ASSESSMENT	129
I.3. SELECTION OF KEY TECHNOLOGIES	129
I.3.1 Data gathering technologies	130
I.3.1.1 Establishment of a network of automatic meteorological stations	130
I.3.1.2 Establishment of a network of automatic hydrological stations	131
I.3.1.3 Monitoring of sea and shoreline	132
I.3.1.4 Modernization of hydraulic laboratories	134
I.3.1.5 Satellite remote sensing	134
I.3.1.6 Geographical Information System (GIS)	135
I.3.2 Coastal protection technologies	136
I.3.2.1 Coastal defense structures	136
I.3.3 Other sector technologies	140
I.3.3.1 Agriculture	140
I.3.3.2 Livestock	143
I.3.3.3 Fishery	143
I.3.3.4 Forestry	144
I.3.3.5 Health	145
I.4 IDENTIFICATION OF EXISTING BARRIERS AND POLICY NEEDS	147
I.5 DEFINE AND SELECT ACTIONS	147
<b>ANNEX I - EVALUATION MATRIXES</b>	149
GHG ABATEMENT TECHNOLOGIES	150
COASTAL ADAPTATION TECHNOLOGIES	157



# TABLE OF CONTENTS

<b>ANNEX II – PROJECT IDEAS</b>	163
GHG ABATEMENT TECHNOLOGIES	164
COASTAL ADAPTATION TECHNOLOGIES	190
<b>REFERENCES</b>	205

# INTRODUCTION

## i. Albania's Development Context

The last decade has been one of the great political, economic and social transformations in Albania. During the first decade of the transition, at a time when many other former communist countries for various reasons resisted implementing reforms at all, Albania was considered to be a courageous and ambitious country willing to carry out radical reforms. The country attained considerable success in many important indicators but in contrast to other former-communist countries, the first five years of the transition culminated in the internal crisis of 1997 owing the collapse of pyramid schemes, which severely damaged the achievements been accomplished at early stages of transition. This crisis was reflected in the drastic fall of the production due to the massive shutdown of inefficient state-owned companies and the collapse of the agricultural production. This can be clearly seen in the negative growth of the GDP up to the year 1993 and in the high levels of the inflation. (see Table 1).

The implementation of an ambitious reform program coupled with a liberalization of prices and markets, privatization, establishment of a commercial banking system, and the drafting of new legislation brought forth swift and notable results in macro-economic stability, which was viewed quite positively by international institutions. During the period 1993-1996, in particular, there was an impressive growth in the private sector, which led to a substantial rise in GDP of about 13% and in fall of inflation to 6%. The private sector, almost non-existent up to the year 1990, turned into the main contributor to the GDP with about 75% in 1996. (see Table 1).

Despite of economic reforms, Albania still remains one of the poorest countries in Europe. Poverty is even more prevalent in rural areas where four out of five people are poor. Many families lack access to basic services including water, sanitation and electricity. In remote mountainous areas there is a sense of isolation and abandonment.

**Table 1:** The main macro-economic indicators for Albania: 1991-2001

Indicators	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001
GDP growth at constant price (%)	-27.7	-7.2	9.6	8.3	13.3	9.1	-7.0	8.0	7.3	7.8	6.5
Inflation (%)	104.1	236.6	30.9	15.8	6.0	17.4	42.1	8.7	-1.03	4.2	3.5
Exchange rate USD / Lek	25.0	98.7	100.9	95.0	94.5	103.7	149.8	150.6	137.7	143.7	144.0
FDI (Million USD)	8.0	32.0	45.0	65.0	89.0	97.0	42.0	45.0	51.0	92.0	220.0
Unemployment rate (%)	8.3	27.9	29.0	19.6	16.9	12.4	14.9	17.7	18.0	16.9	14.6
Total GDP in current prices (Lek)	16,404	50,697	125,334	184,393	229,793	280,998	314,716	460,631	506,205	536,202	576,533
Contribution of the private sector (%)	5.0	10.0	40.0	50.0	60.0	75.0	75.0	75.0	75.0	75.0	75.0

Source: INSTAT



After 1990 the major changes of the economy also affected the change of the GDP structure. Because of the massive damages and the drastic reduction of the production levels in general and especially in other branches of the economy such as industry, transport, services etc., it results that starting from the year 1992 to 1996 agriculture stands for about 54% of the GDP (calculated according to the method of production calculation – see Table 2).

<i>Table 2: The structure of GDP 1992 - 2001</i>										
Sector share (%)	Years									
	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001
Industry	32.1	16.9	13.9	12.5	11.7	15.5	13.8	11.4	11.4	11.7
Agriculture	42.5	54.2	54.6	54.6	54.6	30.8	31.2	30.7	28.5	28.1
Construction	6.6	7.6	9.1	9.6	11.4	4.6	4.3	4.1	4.9	6.1
Transport	3.3	3.0	3.1	3.4	3.5	6.5	7.6	10.3	11.0	9.9
Commerce, hotels & rest						24.3	20.8	21.2	23.2	21.3
Services	15.6	18.3	19.4	19.8	19.9	21.1	25.9	27.9	25.9	26.7
Total	100	100	100	100	100	100	100	100	100	100

Source: INSTAT

In 2001, the Government of Albania in collaboration with the World Bank prepared its Strategy on Growth and Poverty Reduction known as the National Strategy for Socio-Economic Development (NSSED), which is the country's first comprehensive economic development strategy. This strategy, developed through a broad participatory process that included local government, civil society, private sector and donors, aims to address poverty reduction through the sustainable development and a broad set of reforms and activities. It is also seen as one of the mechanisms to achieve the Millennium Development Goals (MDGs) as long-term targets for development as agreed globally, in particular through the United Nations Development Program (UNDP). In addition, in the context of the adoption of MDGs, efforts are made to review and adapt the NSSED targets to comply with the MDGs required trends.

Albania is also in the process of negotiating a Stabilization and Association Agreement (SAA) with the European Union (EU), which will set the conditions for the country's eventual accession into the EU. The process of integration in the EU is at focus of all discussions in Albania, in particular since 1997. The Government considers the signing of the SAA to be a political priority, representing the confirmation of the progress made in Albania and an indication of the Government achievements, which will strengthen and accelerate reforms in all fields thus bringing the country progressively closer to the EU. The policies that need to be adopted and actions to be taken under the SAA are fully in line with the NSSED. The NSSED and SAA are the main focus of national development and donor support.

## ii. Environmental context

According to the Albanian Constitution, every citizen in Albania is entitled to “an ecologically healthy environment for present and future generations” as well as “access to information on the state of the environment”. The Constitution also requires the “rational exploitation of forests, waters and pastures based on the principle of sustainable development”.

The Law on Environmental Protection (1993, amended in 1998 and 2002) forms the basis for environmental management in Albania. The law addresses the prevention and reduction of pollution, sustainable management of natural resources, monitoring and how to determine pollution levels. It provides for binding provisions on environmental impact assessment and the implementation of the polluter pays principle.

A series of sector laws include provisions on environmental protection, for example the law on water reserves, law on mining, and laws on regulatory entity of waste waters, hunting, forestry, soil, urban planning etc. These laws are accompanied by a considerable number of by-laws. The legislative framework is already quite comprehensive.

Several important laws are adopted by the Parliament such as the Law on Environmental Administration of Solid Wastes; the Law on Environmental Treatment of Used Waters; the Law on Environmental Impact Assessment; the Law on Protected Areas; the Law on Protection of Marine Environment from Pollution; the Law on Air Protection. There are also several Decisions recently adopted by the Government of Albania such as the Decisions on: Environmental Monitoring; Environmental Standards; Procedures Related to the Designation of Protected Areas; Administration of Protected Areas; Designation of Nature Monuments. However, the challenge remains not so much in the legislation, which seems to be in place, but in its application and enforcement.

The National Environmental Action Plan (NEAP) is the basic document presenting the Government's policy and general programs in the environmental sector. The NEAP was first prepared with assistance from PHARE and the World Bank in 1994. It was revised in 2001 (covering the period 2002 – 2005) through an extensive consultative process involving a large number of stakeholders organized into thematic work groups. The main issues identified through the NEAP are: (i) Development of policies and programs; (ii) Improvement of the legal framework; (iii) Institutional strengthening and capacity building; (iv) Public awareness rising.

Priority investments are to focus on watershed management, forestry, flood control, solid waste management, water supply, sewage systems and urban management. However, the revised NEAP does not set out priorities. Moreover, although each proposed activity in the NEAP is budgeted; most funds have only been estimated and not obtained. An inter-ministerial committee, chaired by the Prime Minister, has been established to enable implementation of the revised NEAP.

Other main policy documents that address environmental concerns directly or indirectly include NSSD which is complemented by many sector strategies such as: the National Water Strategy (2004); the National Strategy for Development of non - Food Industry Sector (2004); the National Energy Strategy (2003); the National Strategy for the Development of Agriculture and Food (2003); the National Biodiversity Strategy and Action Plan (2000); the National Waste Management Plan (1996).

The Ministry of Environment (MoE), in institutional terms is the highest governmental body responsible for environmental protection in the Republic of Albania. The MoE was established in September 2001 from the National Environmental Agency, which had been established in 1998, based on the Committee for Environmental Protection in the Ministry of Health and Environment. The Law on Environmental Protection states that the Ministry is responsible for the implementation of global environmental agreements in Albania. Specifically, the Decision of the Council of Ministers on “Environmental monitoring” mandates the MoE to monitor all environmental issues, including the fulfillment of obligations and coordination of activities relating to the global environment and to the international environmental agreements. Within this overall framework, the Ministry collects necessary data from different research institutes and line ministries.

The Environmental Inspectorate established at the central level and Regional Environmental Agencies (REAs), established at the prefecture level, control and ensure the enforcement of the environmental legal framework; supervise and apply preliminary environmental licensing, and collect and process the data on the environmental situation at municipal and prefecture level. Other inspectorates such as the Sanitation Inspectorate, the Forest Police and the Construction Police play an important role as well.

In compliance with the Law on Local Government, municipalities (district level urban areas) are assigned the following environmental responsibilities: the management of water supplies, closed industrial sites, waste and urban green areas. However, the municipalities face enormous challenges as the economy grows and associated environmental issues such as solid waste and air pollution increase. In response, many municipalities have prepared Local Environment Action Plans and Local Action Plans for Environment and Health.

Many sectoral ministries have established environmental units, although the roles and responsibilities of these units have not been fully clarified. The mechanisms for communication and collaboration between the units and MoE have also to be clarified. At the national level exists a number of high level inter-ministerial structures with a permanent or temporary, decision-making or advising mandate. The majority of scientific and research institutions contribute to environmental monitoring based on government decisions and through financial support from the government. MoE also sub-contracts these institutes to collect information and perform other Convention-related tasks. MoE recently established the Institute for Environment.

### **iii. UNFCCC context on technology transfer**

The UNFCCC represents a global accord, which joins all Parties under a global effort to address climate change issue. The overall objective of the UNFCCC, as indicated in the Article 2 is to achieve, in accordance with relevant provisions of the Convention, stabilization of GHG concentrations in the atmosphere at a level that would prevent dangerous anthropogenic interference with the climate system. Such a level should be achieved within a time frame sufficient

to allow ecosystems to adapt naturally to climate change, to ensure that food production is not threatened and to enable economic development to proceed in a sustainable manner.

Achieving the ultimate objective of the UNFCCC will require technological innovation and the rapid and widespread transfer and implementation of technologies including know-how for mitigation of GHG emissions, reducing the vulnerability and adaptation to climate change.

## **Box 1.**

*The beginning of the industrial revolution is usually used as the time frame from which increases in the emissions and accumulation in the atmosphere of the GHG are measured. The introduction of large numbers of new technologies. It is thus not surprising that a frequently expressed view in the world-wide deliberations on global climate change has been: if the introduction of the technologies created the problem, other new technologies will help us in solving it. In most cases, the adequate technologies already exist, but not necessarily in the locations where they could best be used to mitigate increases in the emissions of GHG or adapt to their impacts on environment.*

*Sustainable Development globally will require radical technological and related changes in both developed and developing countries. Economic development is most rapid in developing countries, but it will not be sustainable if these countries simply follow the historic pollution trends of industrialized countries. Rapid development with modern knowledge offers many opportunities to avoid bad past experiences and move more rapidly towards better technologies, techniques, and associated institutions. But to achieve this developing country will require assistance with developing human capacity (knowledge, techniques, and management skills) developing appropriate institutions and networks and with acquiring and adapting specific hardware. Technology transfer must therefore operate on a broad front covering these software and hardware challenges, and ideally within a framework of helping to find new sustainable paths for economies as a whole. A key element is choice. Hence the development of societal and organizational structures that enables well informed choices of technologies, which promote climate stability, adaptation, to the effects of climate change, and sustainable development is essential. To a large extent, the state of environment today is the result of technological choices of yesterday. Similarly, the state of environment in the 21<sup>st</sup> century will be determined largely by technologies we choose today.*

**Methodological and Technological issues in Technology Transfer; IPCC**

Article 4.5 of the UNFCCC states that developed countries “shall take all practicable steps to promote, facilitate, and finance, as appropriate, the transfer of, or access to, environmentally sound technologies and know-how to other Parties, particularly developing country Parties, to enable them to implement the provisions of the Convention.” In this context, technology transfer is designed to assist developing countries in responding to climate change through the diffusion and use of appropriate climate change mitigation and adaptation technologies.

As part of the technology transfer process, a framework for technology transfer was developed and adopted by all Parties at the second part of the Sixth Session of the Conference of Parties (COP) to the UNFCCC in July 2001, in Bonn, Germany.

By decision 4/CP.4 the COP urges non-Annex 1 Parties to submit their prioritized technology needs, especially those relating to key technologies to address climate change. Decision 2/CP.4 directed the Global Environment Facility (GEF) to provide funding to developing countries to assist with this process of

technology needs assessment (TNA). The GEF has responded to this request by providing assistance through Additional Financing for Capacity Building in Priority Areas (Phase II top ups).

#### **iv. What is the Technology Needs Assessment**

The UNFCCC identifies TNA as one of the five key elements of a framework to enhance technology transfer<sup>1</sup>. The elements of the technology transfer are as following:

- Technology needs and needs assessment
- Technology information
- Enabling environments
- Capacity building
- Mechanisms for technology transfer

This framework to facilitate and enhance technology transfer activities under the UNFCCC is based in large part on examination of the experience gained through existing technology transfer initiatives between developing countries and donor organizations. According to the Intergovernmental Panel on Climate Change (IPCC), “technology transfer” means a set of processes covering the flows of know-how, experience and equipment for mitigating and adapting to climate change amongst different stakeholders such as governments, private sector entities, financial institutions, NGOs and research /education institutions.

TNA as a component of the technology transfer process is a mean by which assessment of development and climate response needs and opportunities are brought together and integrated. TNA is a complex process, it is not a stand alone activity; rather it is a continuation of the work most countries have already carried out or identified/recommended in their National Communications and through other activities to enhance technology transfer. TNA entails the identification and evaluation of technical means for achieving specified ends. From a climate change and developmental perspective, TNA would identify technologies, practices and reforms that might be implemented in different sectors of a country to reduce GHG emissions and vulnerability to climate change and to contribute to development goals.

#### **v. Technology Needs Assessment exercise in Albania**

The TNA exercise in Albania is mainly guided by “UNDP/GEF Handbook on Methodologies for Technology Needs Assessment” – final Draft, January 2003; the IPCC “Special Report on Methodological and Technological Issues in Technology Transfer” January 2000; “The First National Communication (FNC) of Albania to the United Nations Framework Convention on Climate Change” July 2002 and other countries experiences. They have shown that the technol

<sup>1</sup> This framework is agreed in decision FCCC/CP/2001/13/Add.1, adopted at COP 7



ogy needs assessment process should be tailored to fit country specific circumstances. Albania's TNA process considers both abatement and adaptation. It has passed through the outcome of the following steps:

- Undertake preliminary overview of options and resources
- Identify criteria for assessment
- Select key technologies
- Identify barriers and policy needs
- Define and select actions
- Prepare a synthesis report on TNA

Specifically each activity /step of the TNA process involves the following considerations:

## *1. Undertake preliminary overview of options and resources*

This step is designed as a data gathering exercise, as it needs to provide a baseline situation of all technology options in all relevant sectors. It is designed as a sector-by-sector approach. Sectors under consideration are those affected by both processes – GHG emissions abatement and adaptation to climate change.

The range of sectors under consideration for the TNA for abatement of GHG emissions includes (i) Energy and Transport; (ii) Land use change and Forestry; (iii) Agriculture; (iv) Waste management and Industrial Processes. The TNA for adaptation is focused on the coastal zone, as it was selected as the most vulnerable area of the country, according to the findings from the Albania's FNC. The range of sectors under consideration for the TNA for coastal adaptation includes: (i) Water resources ; (ii) Agriculture; (iii) Forestry; (iv) Health; (v) Tourism and settlements.

The preliminary overview is focused on the following steps:

- An overview of each sector profile;
- Policy and legislation framework on the relevant sectors;
- The existing work carried out under the Albania's FNC (such as abatement, vulnerability assessment and adaptation studies); and
- Take the stock (inventory) of the technologies currently in use.

## *2. Identify criteria for assessment*

The aim of this step was to create a common objective framework for identifying the highest priority technologies. Identifying the highest priority technologies requires a view of the contribution that new technologies in different sectors might make to social, environmental and development goals. As a result of an expert judgment and key-stakeholder consultation process, taking into account other countries experiences and Albania's development priorities, it was agreed that the criteria for selecting technologies for TNA will depend upon the following factors:



- Contribution to the achievement of most of the MDGs (see Box 2);
- Social acceptability and Suitability for Albania's conditions
- Market potential
- Contribution to climate change mitigation/adaptation

Each of the above factors entails specifically the following sub-factors:

- Contribution to the achievement of most of the MDGs
  - o Job & wealth creation for the poor - **JW** (MDG #1)
  - o Food security - **FS** (MDG#1)
  - o Health improvements - **HI** (MDG #4,5,6)
  - o Capacity building (human, institutional, physical, environmental) - **CB**
  - o Ensure environmental sustainability - **EES** (MDG # 7)
  - o Economic and industrial efficiency improvement - **EI**
  - o Gender equality and empower woman - **GE** (MDG#3)
- Social acceptability and suitability for country conditions **SA&S**
- Market potential
  - o Capital and operating costs relative to alternatives - **COC**
  - o Commercial availability - **CA**
  - o Reliability and potential scale of utilization - **RPS**
- Contribution to Climate Change
  - o GHG emissions reduction potential **GR**
  - o Adaptation potential **AP**

## Box 2.

*The Millennium Development Goals are a set of 8 major goals, 18 targets and 48 indicators. They are an ambitious agenda for reducing poverty and improving the lives of citizens worldwide. The MDGs were agreed upon by world leaders (including the President of Albania) at the Millennium Summit in September 2000. There are 8 MDGs to be achieved by 2015 as following:*

1. Eradicate extreme poverty and hunger
2. Achieve universal primary education
3. Promote gender equality and empower woman
4. Reduce child mortality
5. Improve maternal health
6. Combat HIV/AIDS, malaria and other diseases
7. Ensure environmental sustainability
8. Develop a global partnership for development

*The UN Secretary General, Kofi Annan has asked UNDP to act as a scorekeeper to track progress towards achieving the goals, and to spread awareness of the MDGs across the world and integrate them in the work of the UN system and the member states of the United Nations. In response to the Secretary Generals request and the commitment made by Albania at the Millennium Summit, the UN Country Team in Albania launched the Albanias Response to the MDGs. The report represented the first attempts to establish indicators to allow citizens and their elected representatives to track Albanias progress towards achieving the MDGs. The report also highlighted areas of concern so that Albanias decision maker s and the public could begin to take action to place Albania on the road of the EU. For more information please visit the website <http://www.undp.org/mdg/>*

Determining the weight and importance of each of these factors and sub-factors was another part of the criteria selection process. This exercise was also affected by social, environmental and economic circumstances and based upon the expert judgment. Despite of likely the same set assessment criteria, the TNA teams, respectively TNA for abatement and TNA for coastal adaptation

have been working independently on the assessment process. Having the difference between abatement and adaptation, the weight, scores and importance of the factors and sub-factors selected for assessment have been different. Specifically, for the TNA for abatement, the experts decided the maximum weight for the assessment factors to be 1 and the maximum score for sub-factors to be 100. While for TNA for adaptation an equal weight and score is used respectively for factors and sub-factors. The technology ranking/scoring matrix used is as follows:

<b>Table3: Technology ranking matrix</b>													
TECHNOLOGY	CRITERIA / FACTORS												
	<i>Development benefits</i>								<i>Market potential</i>			<i>Contribution to CC</i>	
	<i>JW</i>	<i>FS</i>	<i>HI</i>	<i>CB</i>	<i>EES</i>	<i>EI</i>	<i>GE</i>	<i>SA&amp;S</i>	<i>COC</i>	<i>CA</i>	<i>RPS</i>	<i>GR</i>	<i>AP</i>
T 1													
T 2													
T 3													
...													
T n													

The above weighing exercise entails a technique of multi-criteria analysis, which in the case of energy and transport sector is combined with the cost-benefit assessment as well. Scoring of technologies under the set of above weighted factors and sub-factors was another step that led to the ranking process, which in turn provides the key technologies.

### 3. Select key technologies

Using the compiled information on alternative technologies for the priority sectors and sub-sectors, both TNA teams have proceeded with selection of key technologies. Based on the ranking of the alternative technologies the top 4 to 5 technologies are considered as key ones for each sector under assessment.

### 4. Identify barriers and policy needs

The prioritization of technologies and sectors in the previous step has offered the opportunity for more focused, in-depth analysis of the prioritized technology needs. This analysis has been consisting on the identification of barriers and policy needs for the ranked technologies per each sector prioritized. The main categories of barriers identified in Albania are as following:

- Policy:
  - o Regulations and standards that preclude new technologies;
  - o Institutional and legal obstacles;
  - o Distorting market interventions such as subsidies for polluting industries;
  - o Regulated markets that create disincentives for new technologies;
  - o Planning system issues.
- Social and cultural issues

- Market structure
  - o Monopoly powers that reduce incentives to innovate and put up barriers to new entrants;
  - o Split incentives;
  - o Access to capital;
  - o Information barriers;
  - o Externalization of pollution costs;
  - o Level of poverty in the country.

## 5. Define and select actions

The selected key technology needs remain as the core of the TNA report which is not a stand –alone document that once prepared will be placed somewhere in a shelf. The TNA would be a living document. It must be coupled with a real plan of implementation. Once the key technologies have been selected and the barriers have been assessed along with the stakeholders, the TNA teams have proposed tangible actions in the form of project ideas. A package of project ideas for the key technologies is designed. These project ideas address key issues critical to the technology, needs such as capacity building, barriers, direct interventions etc.

## vi. Structure of the report

The TNA report provides an assessment of national needs for both types of technologies - greenhouse gas abatement technologies and adaptation technologies. The TNA report starts with an Introduction, including the UNFCCC context, an explanation on what the TNA is and the structure of the report. It has been designed into two chapters structured as follows:

*Chapter 1:* TNA for Abatement of GHG Emissions - this chapter gives an assessment about country needs on less GHG emission technologies for each sector that contributes to the greenhouse gas emission.

*Chapter 2:* TNA for Coastal Adaptation - this chapter gives an assessment about country needs on adaptation technologies focused on the Albania's coastal zone.

Each chapter contains Annexes, outlining evaluation matrixes for each sector, project ideas for the selected technologies and references. A list of acronyms is also provided.



# CHAPTER I

## TECHNOLOGY NEEDS ASSESSMENT FOR ABATEMENT OF GREENHOUSE GAS EMISSIONS

## TECHNOLOGY NEEDS ASSESSMENT FOR ABATEMENT OF GREENHOUSE GAS EMISSIONS

### Introduction

Albania's TNA for abatement of GHG emissions aims at prioritizing of the less GHG emissions technologies. This assessment of technology needs has been made through a sector-by-sector approach, starting with the energy sector which according to the Albania's FNC has the most significant contribution to the overall GHG emissions inventory. The assessment covers also other sectors such as Land Use Change & Forestry; Agriculture; Waste Management and Industrial Processes.

According to the IPCC guidelines for estimation of GHG emissions mobile sources (transport) are considered under the energy category. For that reason, the GHG abatement analysis already performed in the frame of the Albania's FNC has considered the transport under the energy category. For the same reason, the TNA for energy sector considers also the transport sector under its focus. In addition, the category of energy industries is considered under energy one.

For each sector under assessment, the analysis has passed through the following steps:

- A preliminary overview of options and resources <sup>2</sup>
- Identification of assessment criteria
- Selection of key technologies
- Identification of barriers and policy needs
- Definition and selection of actions

---

<sup>2</sup> this step covers (i) an overview of each sector profile; (ii) policy and legislation framework for the sector under assessment; (iii) existing work carried out under the Albania's FNC and (iv) take the stock of technologies currently in use.

## I.1 Overview of options and resources


### I.1.1 Sector profile

The energy sector used to be one of the most important sectors for the Albanian economy. Albania is endowed with a wide variety of energy resources ranging from oil and gas, coal and other fossil fuels to hydropower, natural forest biomass and other renewable energy sources. The role of coal and natural gas has gradually decreased since the beginning of 90's while the oil sector remains stable due to imported oil products. The electricity sector is the most important energy sub-sector. Over 90% of electricity generation comes from hydro energy sources. The energy sector contributes to approx. 10% of the GDP and employs approximately 17000 employees.


#### I.1.1.1 Energy consumption

From the peak of 2.26 million tons of oil equivalent (Mtoe) in 1990 the primary energy supply dropped by more than 50% or to 1.22 Mtoe in 1992. Since then, the primary energy supply has remained relatively constant around the level of 1.84 Mtoe in the year 2001. The most drastic effects are, however, the structural changes that have taken place with regard to the shares of energy sources on the supply side and the final energy consumption by industry sectors and fuels. Up to 1985 Albania had a very energy intensive economy where energy use per economic output was slightly higher than the average for the Central East European (CEE) countries and almost 5 times higher than the average level of the EU countries. The energy consumption per capita in Albania was, however, approximately only 1/3 of the level indicated by the EU average and the average of the CEE countries. During the following 10 years until 1994, Albania's situation changed radically (and there was a continuation in same direction during the period of 1995-2000). The energy intensity was reduced by some 50 % but the per capita energy consumption was reduced even more, to only 1/3 of the 1985-level.

Figure I.1 shows the consumption of the energy resources in all economic sectors during the period 1990-2001, whereas Figure I.2 shows the level of consumption by each energy commodity.

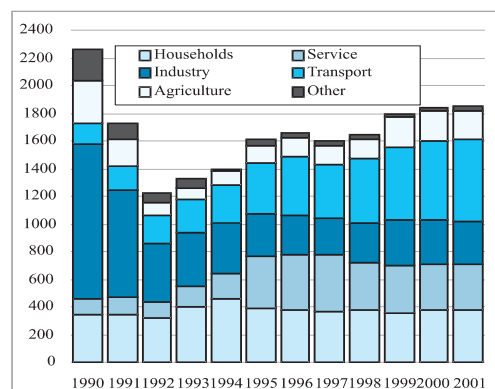

**Figure I.1:** Contribution of each sector in energy consumption (ktOE)

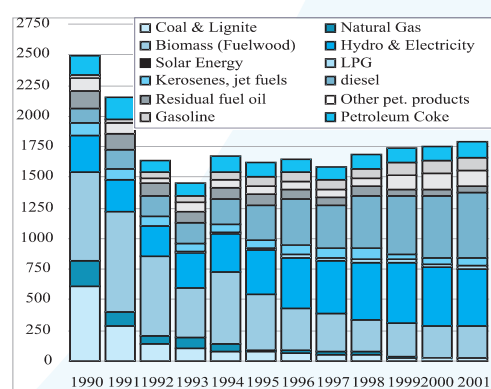

**Figure I.2:** Contribution of energy commodities in energy consumption (ktOE)<sup>3</sup>


<sup>3</sup>Source: Figures I.1 and I.2 are based on the National Energy Balances prepared by the NAE




# I. ENERGY SECTOR

In 1990, the industry consumed 50% of the total sources, declining to 35% in 1992 and 17% in 2001. Transport was the sector that experienced a continuous increase of the energy sources consumption. In 1990 the transport sector consumed 6% of the total energy, reaching the value of 44% in 2001. Another sector that experienced changes was the residential sector, with a consumption of 14.6% of the total in 1990 reaching a level of 21% in 2001. Service sector also experienced high rates of increase of energy consumption passing from 5.4% in 1990 to 16.5% in 2001. Figure I.4 shows that coal, natural gas, electricity, diesel and heavy fuel oil were energy sources that used to play the major role in 1990. One decade later, the situation was quite different with fuel woods, electricity and diesel playing the major role.

Figure I.3 indicates the consumption of electricity according to the economic sectors. During the period 1985-1990 the industry was the largest consumer, followed by service and residential sector and other sectors in a smaller extension. After 1992 the situation changed as many industrial enterprises were closed down and the electricity consumption declined to a minimum, starting to recuperate in the following years due to the reactivation of old enterprises and opening of new ones. This situation remained unchanged till 1999, and then the consumption declined again during 2000-2002 due to the fact that the electric system was unable to supply many small producers rather than the decline of the industrial sector. This fact forced a number of enterprises to install back-up electricity generators. Electricity consumption in the residential sector has continuously increased during the period 1985-1999. Consumption in the service sector increased during the period 1985-1999 but after that started to decline due to the shortage of supply rather than the lack of development.

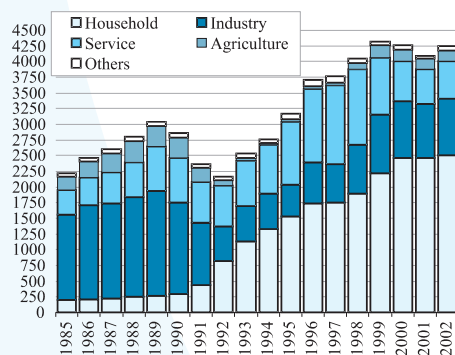

**Figure I.3:** Electricity consumption according to economic sectors (GWh)

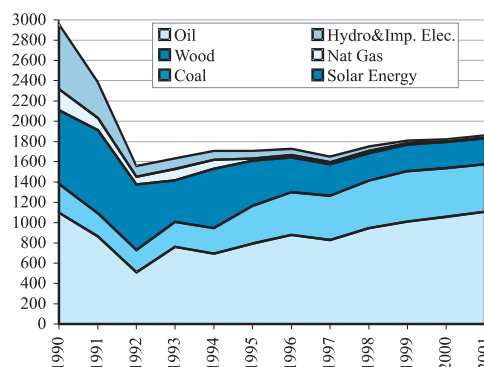

**Figure I.4:** Supply with primary energy resources (ktoe)<sup>4</sup>

Some of main identified problems pointed out through historic development analysis and possible tendencies for Albanian energy sector are:

- Increase of the electricity consumption by households during the transition period has led to high levels of technical and non-technical losses and reduction of security of supply;
- Lack of electricity price liberalization has led to its massive use for differ-

<sup>4</sup> Source: Figures I.3 and I.4 are based on the National Energy Balances prepared by KESH and the NAE.

ent services in the households and service sectors (i.e. space heating and cooking);

- Lack and relatively high prices of other alternative energy sources forced the consumers to focus more on the electricity use;
- Very low efficiency energy use;
- The growth rate in the consumption of diesel and gasoline especially in transports is much higher than what can be accommodated by the supply of domestic oil by-products affecting so the increase of import;
- Production of oil and gas has declined rapidly due to the lack of funds, necessary technical discipline, the natural decline of exploitable sources and efforts to increase oil capacity. This can be compared with the relatively smaller decline, from 80 to 38.5%, in the Ballsh refinery capacity utilization. The Ballsh refinery, which was built in 1978, is the only complex refinery with equipment able to produce a reproduction in the existing and new sources though production sharing agreements have not yet been successful;
- Generation of electricity is dominated by the hydropower output while the thermal based generation has remained stable around 100 GWh per year. During the period 2000-2002 there was a sensitive decline of the electricity production due to drought seasons;
- Supply structure of primary energy sources is becoming less and less diversified due to the increasing role of oil, hydro and fuel woods energy supplies compared to coal and natural gas.

The last years situation indicates that the electricity balance is very tight and Albania's Electro-Energy Corporation (KESH) has become a net importer of considerable electricity quantities.

## **I.1.1.2 Energy resources**

Albania is largely self-sufficient in energy resources and in most years (up to 1989) has been a net exporter of electricity and refinery oil by-products. Albania is rich with energy resources: oil, gas, coal, wood, peat, and hydro-energy etc, which contribute in different ways to meet energy demands in the country.

### **I.1.1.2.1 Oil**


Albania had an early development in the oil industry since 1918 with the contribution of British and Italian companies. Many efforts are also made afterwards by Albanian specialists in collaboration with foreign companies to explore and exploit new sources of oil and gas. In the figure I.5 is shown crude oil production from Albanian oil fields (sandstone and limestone fields) for the period 1987-2001. As it is clearly shown on the chart, Albanian oil production nowadays is reduced at maximum due to many reasons.

The oil sources, which are distributed in the western and southwestern part of Albania, are mainly in two structures: sandstone and limestone. Currently these sources have considerable reserves but their full potential extraction needs advanced secondary methods. The sandstone sources have geological reserves of

# I. ENERGY SECTOR

313.4 million tons, recoverable reserves of 38.8 million tons and a cumulative production of 18.8 million tons. As far as the limestone sources are concerned, they have geological reserves of 345 million tons, recoverable reserves of 30.8 million tons and a cumulative production of 23.8 million tons.

Estimated recoverable reserves are based on projected oil production using currently applied technology, which implies a low recovery factor of 12%. The situation of the oil reserves in early 1995 was: the initial overall reserves are 63 million tons, cumulative production is 46 million tons and recoverable reserves are 17 million tons. In the exploitation of Albanian oil resources, the extraction coefficient varies from 25% in limestone to 12% in sandstone sources. These figures reveal an abnormal exploitation of the sources and as a result considerable quantities of oil remain in the strata. The characteristics of Albanian oil are: a high gravity of the order of 10-17 API and sulphur content of over 4%. In total, Albania has become highly dependent of imported oil products due to a declining of oil production in combination with a sharply growing demand for gasoline, diesel and heavy fuel oil.

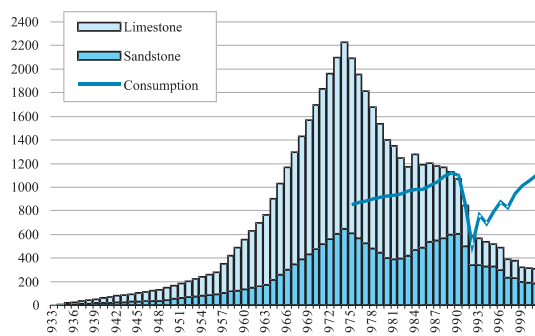

**Figure I.5:** Crude oil production and consumption for the period 1987-2001 (1000 tons).

The oil refining industry in Albania has four refineries, located respectively in Cerrik, Kucove, Fier and Ballsh. Three refineries (Cerrik, Kucove and Fier) were built in the 1960's and they are simple ones with distillation processes (topping and small vacuum distillation) as well as washing process of the light products and have been used for refining of part of crude oil produced in Albania, fulfilling the needs of Albanian market until 1978.

Operational loads on the Cerrik, Fier and Kucova refineries has declined very significantly with the fall in domestic oil production since 1974, particularly after the larger and more sophisticated refinery in Ballsh came on line. The Cerrik and Kucova refineries were progressively suspended from operation after 1990, while Fier continues to function at about 20-30% of finished products. However, although it was built in 1978 the technology of this refinery was relatively outdated (Chinese plant since the first half of the 1960's) which means that from the start of operation the refinery performance was not at the average level of worldwide refineries. A relatively modern lubricating oil production section based on Rumanian technology was added in 1988. Most of units are somewhat outdated and modern analytical equipment necessary for good quality control are lacking. Ballsh refinery separated crude oil according to the fol-

# I. ENERGY SECTOR

following table I.1. Nowadays, very little is done in technological improvements or in modernization of processes, to mention only the replacement of Chinese catalysts with European ones.

**Table I.1: Ballsh refinery separated crude oil products**


Nr.	Oil by products	Share of production
1	Gasoline	10.8%
2	Gas oil	28.0%
3	Kerosene	6.6%
4	BTX	4.3%
5	Solvent	0.7%
6	L.P.G.	0.6%
7	Coke	15.6%
8	Lube residue	11.4%
9	Fuel oil	14.3%
10	Sulfur	1.5%
11	Lube Oils	2.0%
12	Fuel gas & losses	7.2%

## I.1.1.2.2 Natural gas

The commercial production and consumption of natural gas in Albania began in 1963 and gradually seven gas fields were brought on stream: Divjake, Frakull, Ballaj Kryevindh, Durrës, Povelce, Panaja, Delvina where about 500 wells were drilled. Until the end of 1995 about 3.04 billion m<sup>3</sup> of natural gas were extracted from these fields. In addition, about 8.5 billion m<sup>3</sup> of associated gas were extracted from the oil wells resulting in a total of 11.5 billion m<sup>3</sup> of gas extracted in Albania. In oil equivalent terms, associated gas accounts for a little over 5% of the total ultimate resources of oil and gas: some 3% in the case of sandstone deposits and 12% of limestone deposits. In most fields, however, associated gas represents less than 4% of total oil and gas resources.

A much higher rate of exploitation of the limestone deposits is due to the dominance of these fields in oil production in the 1960s and 1970s. However, the extraction of gas has been considerably faster than oil in both types of deposits. Over 30% of the last resources in limestone deposits and 10% in sandstone deposits have been exploited to date. Associated gas extraction has averaged 3 to 4% of oil extraction in both limestone and sandstone reservoirs.

In the figure I.6 is shown graphically the natural gas production from Albanian gas and oil fields for the period 1981-2001.

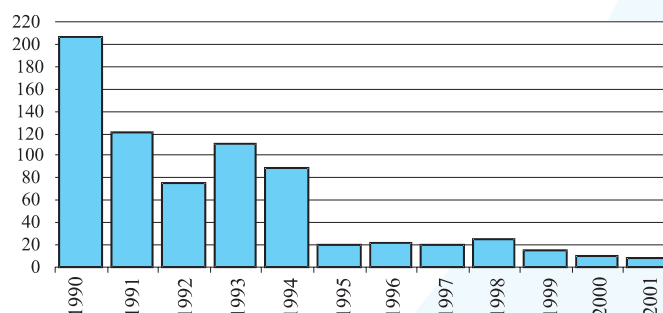

**Figure I.6:** Natural gas production for the period 1981-2001  
(Million m<sup>3</sup> N)

Currently these fields are in the final phase of their life cycle. The number of producing wells has fallen (to about 30) and the flow rates are minimal (from 300 to 1500 Nm<sup>3</sup>/day). Of the existing fields, the condensate gas field of Delvina has the best growth potential. The results of the new wells drilled near the existing fields by the national oil company Albpetrol, in recent years, have had poor results in discovering new gas reserves and have not economically justified the investments undertaken.

The decline of associated gas production after 1992 is linked to the outdated extraction technology, equipment, and the maintenance of wells and the decline of work discipline in all gas and oil sectors. The investments in the existing oil deposits have been small and the funds were mostly used in wrong direction.

The integration of Albania with the international gas network is an element of the energy policy because Albania is the only European country not connected to the network. The studies indicate that Albania does not have a big gas market for consumers. However, consumers like Thermal Power Plant (TPP), chemical and petrochemical industry, metallurgy, food and beverage industry, building materials industry, etc, can use imported natural gas.

According to the National Strategy of Energy the potential role of the imported natural gas as fuel for electricity generation and for industrial use has been analyzed and compared to other alternatives, mainly to the fuel oil use. According to the active scenario, the potential market for natural gas will be developed very slowly with 250 million m<sup>3</sup>N in 2006 and 560 million m<sup>3</sup>N in 2010. According to the passive scenario, the potential market will be developed rapidly, with 490 million m<sup>3</sup>N in 2006 and 1160 million m<sup>3</sup>N in 2010.


### **I.1.1.2.3 Coal**

Coal is one of largest energy sources of Albania and it is spread in four main basins. The forecasted coal reserves are around 226.49 Mtoe. In general, our coal basins have coal with low net calorific value and thin mineral layer that causes a higher cost for energy unit compared to imported coal. These problems led to the closing down of many coal mines in Tirane-Durres, Pogradec and Korca basins except Bezhani mine, which is almost an open one. The Bezhani mine reserves are around of 2.77 Mtoe and it is the only mine in Korca basin with an efficient coal extraction cost. Proven reserves are approximately 14.7 Mtoe.

During 1990s, domestically produced coal has been the “big loser” since the economic turmoil caused many industrial consumers to shut down and thus reduced energy demand significantly. Supply and use of coal has dropped from around 2 million tons of coal or 19% of the primary energy supply in 1990 to 27500 TOE or 4% of the primary supply in 1995. In the year 2001 it accounted for only 1.1% of total energy sources. Coal is one of the biggest energetic reserves in Albania. The reserves discovered to date are at a relatively high altitude and located in four main deposits. The domestic geological reserves are calculated to 712 million tons or 178 Mtoe and the commercial reserves are

# I. ENERGY SECTOR

280 million tons or 70 Mtoe. In general the mining depth is small and varies from the only open - pit mine (Korca - Erseka Coal Basin-Bezhan Mine) to 400 meters (Memaliaj Coal Basin). Historically, coal has been produced according to the figure I.7.

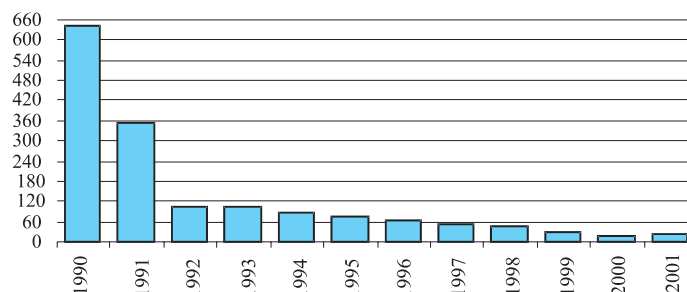

*Figure I.7: Coal production in Albania (kTOE)*

On the other hand, Albanian coal is very poor in quality, e.g. the sulphur content is up to 4%. The ash content and moisture are also high, leading to low calorific values and high emission of SO<sub>2</sub> as well as particles. In the table I.2 are reported some characteristics of main coalmines in Albania.

Mine	Net calorific value (kcal/kg)	Moisture content (%)	Ash content (%)	Sulphur content (%)
Krrabe	4254	7	30	4.0
Mushqeta	2676	9	53	3.2
Valias	1746	16	58	3.0
Alarup	3196	36	20	0.9
Memaliaj	3058	12	38	3.8
Verdove	2054	7	64	3.9

Two enrichment plants of Chinese design have been operating for many years at Valias and Memaliaj. These accept coal fraction above 6 mm in size and had a combined capacity of about 950 thousand ton/year of raw coal. Coal recovery in these plants varies between 40-65% and the treated coal frequently has a lower heating value of 3500 kcal/kg compared to a design specification of over 5000 kcal/kg. A third enrichment plant, with a capacity of 500 thousand ton/year has begun operation at Maliq in 1992, in the Southeastern region (close to Korca). However, these coal enrichment capabilities have stopped working since 1996 due to the lack of coal production, lack of spare parts and due to the fact that the cost of coal production and enrichment in Albania is too high compared with imported coal. Average costs for the various phases from mining to final distribution indicate that the principal cost component is due to mining though this varies widely from mine to mine. Coal extraction had contributed on average about 50%, enrichment had just over 30% and transport less than 20%.

Pulverized coal waste and fractions smaller than 6 mm, obtained as products from the washing plants, amounted to between 440 and 490 thousand ton/year, prior to the drop in coal production. These have been largely fed into bracketing



plants. The remaining 30% or so of the coal used to be burned as such. Different types of coal were frequently mixed together in order to decrease slag formation. Historically, coal use has been concentrated in district heating (including central heating) and power generation usually located close to the mines, especially in Elbasan, Tirana, Maliq, Cerrik, Korca and Vlora. Regarding coal-fired TPP's, the following plants were built: TPP Korçe 6 MW, TPP Elbasan 6 MW, second phase of TPP Fier 60 MW and TPP Ballsh 24 MW. All of them used to produce heat and power.

In 1989 the distribution of coal to end users was as follows: central and district heating plant, combined heat and power plants about 48%, households for heating and cooking about 20%, export about 16%, heat for industrial process about 10%, coal used in industrial furnace about 10% and other consumers 4%. The situation has changed drastically on the year 2001 where firstly coal from 2.18 million tons has been reduced up to 94000 ton and secondly it is consumed almost entirely in building materials industry.

## **I.1.1.2.4 Hydro energy**

Albania has a major hydropower potential of which only 35% is being exploited so far. Hydropower capacity installed up to year 2002 is 1446 MW. Average output from hydropower is 4162 GWh. Profitability of hydropower exploitation is conditioned by the geological and topographic conditions for construction of dams and particularly by topographic conditions in view of avoiding as much as possible the land flooding. Their construction depends in large on big capital investment per unit.

The total hydropower reserves are estimated around 3,000 MW and the potential of annual generation may reach 10 TWh. According to the actual system preferable new plants in the south part of Albania (Vjosa and Devoll) are considered, which will make possible and create more profitability on the geographic balance of supply and demand. Based on the studies of Institute of Hydrotechnology Studies and Designing the implementation of the fully exploitation schemes of Drin, Devoll and Vjosa rivers has been made possible. The new probable Hydro Power Plants (HPPs) to be constructed in the future are those on Drini river (i) Bushati HPP [84 MW]; (ii) Peshkopi (Skavica 1) [130 MW]; (iii) (Skavica 2) [350 MW]; on Vjosa river (i) Kaludha HPP [75 MW]; Dragot-Tepelena HPP [130 MW] and Kalivaci HPP (100 MW); on Devoll river: (i) Bratila HPP (115 MW) and (ii) Banja HPP (80 MW).

Exploitation of hydro energy through small HPP schemes is of interest, too. Until 1988, in Albania were built 83 small HPPs, whose capacity varies from 5 to 1200 kW, with a total capacity of 14 MW. These HPPs are mostly of derivation type and exploit the water springs and streams closed to these areas and the average life of these HPPs is 25 years. Based on the various hydro-energetic studies carried on about small HPPs they are of the range from 100-120 MW.



## I.1.1.2.5 Biomass

Estimations of agriculture residues are based on average ratio between residues and output per unit for each of the main agriculture crops. These ratios differ from one area to another, and are indirectly related to the agriculture output and other conditions. According to some statistics residues in Albania in the year 1980 have been around 800 [toe/year], while in 2001 were around 130 [toe/year].

### Box I.1.

Biomass can be classified in four major categories: (i) woods or wood residues from various wood processing industries; (ii) vegetation residues (stems, seeds etc.) after completion of their production cycle, which are not used in other economic sectors; (iii) energetic plants (woods) cultivated to be burned as biomass, and (iv) animal residues (bones, skins, manure), which are not used in other economic sectors.

Data on forest resources are based on inventories made every 10 years from the General Directorate of Forests and Pastures subordinated to the Ministry of Agriculture and Food. Approximated total forecasted resources reach some 125 million m<sup>3</sup> (14.3 toe). Forests are classified in these major categories: high forests which represent 47-50% of the total wood resources, copses, which are 29-30% of total resources and bushes which are 24-25% of total wood resources. From three aforementioned categories, only 10% of high forests, 50% of copses and 100% of bushes are used as fuel wood. From these data, proven resources of fuel wood are respectively 5.87, 18.25 and 30 million m<sup>3</sup>. An approximated value of total proven reserves of fuel wood is considered to be about 6 Mtoe.

## I.1.1.2.6 Solar energy

Albania has a considerable potential for the exploitation of the solar energy due to the high number of sunshine hours and high values of solar radiation (see tables I.3 and I.4). Studies of expected climate changes for Albania indicate that in the future these figures are expected to be higher, generating higher potential of solar energy exploitation.

Solar energy potential is not studied and used in the overall Albania's potential territory so far. There are carried out only some area studies and very few implementation projects mainly funded by donors.

**Table I.3: Daily average solar radiation in (kJ/m<sup>2</sup>)**

County	Jan	Feb	March	April	May	June	July	Aug	Sept	Oct	Nov	Dec
Peshkopia	9813	11584	13952	15127	17192	19225	20704	19815	18838	14189	12161	11566
Shkodra	10857	12316	14119	15771	17425	19253	20836	20069	18855	14450	12977	12235
Durres	13205	13523	14347	17604	18637	20228	22277	23199	20305	17750	15347	14677
Tirana	12066	13292	14243	16007	18555	20538	21598	21896	19854	16564	13604	13250
Vlora	14239	13894	13733	17726	19207	21376	22926	24093	23217	19791	17799	15347
Saranda	12868	15445	16633	18511	20405	22758	23443	24101	23237	17390	16857	14820

**Table I.4: Sunshine hours according to measuring stations**

Meteorological Station	Hours with sun (h/year)				
	1951-1960	1961-1970	1971-1980	1981-1990	Average, 1951-1990
Vlore	2 734	2 718	2 765	2 524	2 685
Durres	2 666	2 684	2 717	2 310	2 595
Kucove	2 532	2 674	2 648	2 441	2 574
Shkoder	2 533	2 489	2 370	2 232	2 406

# I. ENERGY SECTOR

National Agency of Energy (NAE) and Albania EU Energy Efficiency Centre (EEC) have carried out a number of studies for installing solar panels in both residential and service sector.

Based on these studies, the EEC has managed providing small grants from various donors like EU, OSCE or GEF and has installed about 15 solar panel systems.

Albanian citizens have started installing solar panel systems for hot water supply promoted repeatedly by the EEC through various awareness campaigns.

## Box I.2.

*Solar energy is clean and inexhaustible. It reduces the dependence on fossil fuels and does not pollute environment. Consequently, the economic advantages of solar heating systems can only be appreciated by means of a global cost approach and reduction of greenhouse gases. Active exploitation of solar energy is achieved in systems that absorb this kind of energy through flat collectors. Hot water can be used for space heating, when its temperature is high, but it is used largely for Domestic Hot Water (DHW) needs. Nowadays, this technology has resulted as the most viable for exploitation of solar energy. There exists also the possibility of transforming solar energy directly into electrical energy without going through intermediate stages, using photovoltaic systems, but the cost of one energy unit produced by them is around 27-32 US cents/kWh. Some of the advantages of exploiting solar energy are: (i) it is a huge energy source; (ii) it is free of charge; (iii) its exploitation provides a high flexibility. The exploitation of solar energy has some disadvantages, too. Initial investment required for exploitation of solar energy for all applicable technologies is very high. This can be explained with the fact that economic benefits of its exploitation depend on the availability of solar energy (which is not continuous), the solar radiation which is variable during the day as well as the large surfaces needed to collect this type of energy. Major limit of renewable energies (solar energy inclusive) is that they are not continuous; therefore all their production systems require energy accumulation. The energy can be accumulated in thermal or electrical accumulator.*

If the solar panel systems in Albania would be developed similarly with that of Albania's neighboring countries like Greece, the production potential of hot water supply should be equal to the energy amount of 1000 GWhth (or 125 MWth of installed capacity), which is almost equal to the capacity of a new TPP to be constructed in Vlora. This is an indicator of high potential values for solar energy in the country.

There is also a tendency for production of the solar panels in the country. First attempts are already identified.

## I.1.1.2.7 Wind energy

According to the research work performed by the Institute of Hydrometeorology, some regions were identified in Albania as most suitable for development of wind energy – these are the regions characterized by wind speeds exceeding 3-4 m/s. In addition to opportunities for installation of large wind facilities, there is considerable potential for small wind power facilities in the remote areas; for example, in remote areas characterized by the high costs of delivery of fuels for electricity and heat supply. Pre-feasibility studies have shown the highest wind speed zones and with too much more longer period are those on the seashore lowland.

Developing wind energy is one of the supported and sustainable options for long-term energy sector development program in Albania. Its development, though, requires strong governmental and international financing support.

According to the newly adopted energy strategy, a feasibility study should be done for the selection of the best sites of installation of wind power farms.

## Box I.3.

*Wind energy is used for water pumping, windmills and last decades the attention is concentrated on the power generation. Aggregates operating with wind energy have an installed capacity from few [kW] to 4 [MW], and are being used successfully in isolated areas. Wind energy is a considerable potential as energy source, uniformly widespread in every corner of the earth. Windmills can be installed quickly and they need a small area of land. In most developing countries, installations of windmills have a common concern that of not having continuous measurement of the wind speed and its duration among time series for several years. For this reason, various companies that are willing to invest in this sector are faced with these constraints, which make them difficult to take a decision whether it is feasible to invest in a certain area without these necessary data.*

# I. ENERGY SECTOR

Data received from the meteorological stations, as given in the in table I.5, are approximate and not very reliable due to the obsolete measurement equipment. They are available as approximates only for some regions of our country, as indicated in the following table:

<i>Table I.5: Average speed of wind (m/s)</i>				
Month	Durres	Kryrvidh	Tepelene	Sarande
January	4.10	5.00	5.80	4.90
February	4.50	5.10	5.70	4.90
March	4.20	4.60	4.90	4.80
April	4.10	4.50	4.30	4.60
May	3.60	3.70	3.60	4.30
June	3.40	4.10	3.40	4.50
July	3.30	4.30	3.50	4.60
August	3.20	4.00	3.50	4.40
September	3.30	4.30	4.10	4.10
October	3.50	4.70	5.30	4.50
November	4.10	4.90	4.70	4.70
December	4.40	5.10	5.60	5.00
<b>Mesatare</b>	<b>3.80</b>	<b>4.52</b>	<b>4.53</b>	<b>4.60</b>
<b>Density</b> W/m <sup>2</sup>	75 150	100 230	100 230	110 250

The EU objectives for the next 20 years are to secure 20% of the electricity supply from wind power plants. In Albania's conditions, it is estimated that by 2020, only 4% of the electricity generated can come from wind energy sources (some 400 GWh/year). This implies to give priority to the construction of 20 windmills nearby 20 pumping stations that are situated along the Adriatic cost safeguarding the land from floods. Based on some studies carried out by the NAE, in the costal lowland nearby pumping stations, it is identified an electricity demand of around 30 GWh/year or 0.7% of the actual domestic power generation. In these zones average speed of wind, throughout the year, is around 4-6 m/s (10 m height), and the average annual energy density of 150 W/m<sup>2</sup>. Predicting that a concession project with a total investments of US\$ 150 million crediting limits, for the construction of 20 windmills within a period of 20 years<sup>5</sup> it is expected to get an additional electricity amount of 400 GWh/year in the Albania's energy balance by 2015.

## I.1.1.2.8 Solid wastes

Albania has considerable potentials of using the solid wastes as energy sources. Rough estimates are made to identify the potential of solid wastes as energy source.

The forecasted energy resources from solid urban wastes in our country by 2010 will be around 9.517 toe.

The potential of municipal solid wastes as fuel is given primarily through their ingredients, calorific value, moisture content and quantity of non-combustible material.

### Box I.4.

*Solid wastes may be used for energy production, but it should be emphasized that their cost is much higher than other traditional fuels. There are four well-known ways of solid waste treatment with a goal of energy production: (i) direct combustion; (ii) production of combustible briquettes; (iii) production of gaseous or liquefied fuels and (iv) production of biogas from their bio-degradation. Since these schemes require big capital investment it is typical that they require collection of large quantity of solid wastes and their products have a large selling market. When the selling market is difficult to be found, these products may be combusted for producing steam (to generate electricity) or hot water.*

<sup>5</sup>This means building nearby each pumping station a windmill of 9 MW capacity with wind turbines of installed capacity WT1500; WT1000; WT600

# I. ENERGY SECTOR

Solid wastes are made of components of many elements given in table I.6 (the net calorific values are given for comparison purposes as well). Table I.7 gives the urban waste reserves for some main areas of the country.

The issue of municipal solid wastes is an important one either for developed countries or developing ones, their amount grows with welfare growth of the people. Conservation of raw material through restoring and recycling as much as possible of municipal solid wastes is of vital importance nowadays. In table I.6 are given the net calorific values of some typical components of solid wastes. These values are provided from the studies made in the frame of preparation of National Waste Management Plan.

**Table I.6:** *Calorific value for some typical components of solid wastes.*

Ingredients of solid wastes.	Net calorific Value [MJ/kg]
Paper	14.6
Plastic	37
Cautchouc	34.7
Old rags	16.3
Food wastes	6.7
Vegetable and animal wastes.	18
Wood wastes.	19.5
Coal	(20-35)
Oil	44
Natural gas	52.4

**Table I.7:** *Energetic content of urban wastes in some areas of Albania*

Area	Energetic contents in year 2002 in Toe.	Energetic content in year 2010 in Toe. <sup>6</sup>
Durres	191	1071
Elbasan	155	861
Fier.	110	524
Korce	112	584
Shkoder	131	724
Tirane	399	2938
Vlore	130	704
Albania	1783	9517

## I.1.1.2.9 Geothermal energy

There are a variety of geothermal sources, which may be classified as: hydrothermal sources, hot drought and melted rocks. From these three groups, up to date, only hydrothermal sources have found practical utilization in Albania. Hydrothermal sources are divided in: sources which produce drought steam, sources producing saturated steam (temperatures of these two sources are higher than 150°C) and sources where hot water is produced and used in some countries for space heating. A new technique of using the geothermal energy, which is spreading out, is that of injection of cold water in deep abandoned wells of oil and natural gas where it gets warmed. Water is injected with a temperature of (7-8)°C and comes out on the surface with a temperature of (22-25)°C. In our country the geothermal sources producing steam are still not fully discovered. As geological studies show there is a little hope for these sources and hydrothermal sources are of relatively low temperature. Data on these sources are given in the table I.8.

<sup>6</sup>The National Plan for Management of Solid Wastes makes the forecast for energetic content in year 2010.

**Table I.8: Geothermal resources in Albania**

No.	Location of hydrothermal source	Temperature, C <sup>0</sup>	Title of Well	Temperature of water on surface, C <sup>0</sup>
1	Karame-Sarande	34	Ishmi-1/b	60
2	Langarice-Permet	26-31	Kozan-8	54
3	Sarandapori-Leskovic	26-27	Galigati-2	45
4	Tervoll-Gramsh	24	Bubullima-5	48-50
5	Llixha-Elbasan	58	Seman-1	35
6	Kozan-Elbasan	57	Ardenica-12	32
7	Shupal-Elbasan	29-30		
8	Mamurras-Kruje	21		
9	Peshkopi	35-43		

Most important geothermal resources in Albania are:

- Geothermal area of Kruja is the zone with the largest geothermal resources in Albania, with a size of 18 km length and 4.5 km width, containing reserves of a range of  $5.9 \times 10^8$ - $5.1 \times 10^9$  GJ;
- Geothermal area of Ardenica where the water springs have a temperature of 32-38°C and a water flow is 15-18 l/s;
- Geothermal area of Peshkopia where there are some geothermal sources located next to each other. Water flow is about 14-17 l/s and the temperature is 43.5°C.

### I.1.1.3 Energy supply and production

Since 1990 there have been major structural changes regards the shares of energy sources on the supply side. Domestically produced coal and gas have been the “big losers” since the economic turmoil caused many industrial consumers to shut down. The main issues on the energy supply and production side are:

- Albania has become a net importer of electricity and this will continue during a number of years until the domestic generating capacity is expanded;
- The production of oil and gas has declined rapidly, due to the lack of necessary technical discipline to maintain fixed levels of the production and the natural decline of exploitable resources;
- The generation of electricity is dominated by the hydropower output, which has increased from 2800 GWh in 1990 to 4000 - 4500 GWh in 1999-2000 (+8.6% per year on average) whereas the thermal based generation has remained stable around 200 GWh per year;
- The real harvesting rate for fuel wood is believed to be at a level equal to 300000 – 350000 toe but this level is not sustainable in the medium term without re-plantation.

#### I.1.1.3.1 Albanian power sector situation

Notwithstanding from financial barriers to import, the main problem that Albanian power sector faces today is the limited technical capacity to produce and insufficient imports resulting in maximum possible electricity supply of 18-20 million kWh/day. As a consequence, the power system fulfils only 70-80% of the total demand during the peak winter period, causing electricity load shedding to customers. The most urgent problems that the Albanian power sector is facing today are the following:



# I. ENERGY SECTOR

- *Current generation capacity* is insufficient to meet the actual demand of 6.60 TWh/year for 2003;
- *Problem of the so-called “non-technical losses”*. Non-technical losses has been very high, but in 2000 and 2001 these kind of losses were reduced due to very strict measures taken by the Ministry of Industry and Energy and the Donors Group in cooperation with KESH and ENEL;
- *High values of technical losses in the transmission-distribution network*. KESH in close cooperation with the Donors Group and ENEL have prepared an Action Plan, updated every year, in order to reduce the losses. Necessary investments for this objective are being funded by the financial package approved by the Donors Group;
- *Power interconnection to neighboring countries*. Power interconnection to neighboring countries includes three high voltage lines. Due to the instability of the system, the effective capacity of lines is reduced to 400 MVA. The capacity was considerably increased in 2001 due to the increase of transforming capacities in Elbasan substation and the commissioning of a 220 kV line (4 km) between Elbasan 1 and Elbasan 2 substations, in August 2002. This created for KESH the possibility to import large quantities of electricity and reduce the electricity load shedding, but due to the technical limits of Greek system interconnection lines, the importing capacity is considerably reduced, requiring an extension towards the north part of the country;
- *High values of electricity consumption for space heating*. A strong tendency towards the increase of electricity consumption for space heating is becoming highly evident more and more, although other possibilities to use alternative energy sources already exist. Electricity which is used for heating in households and services is the main reason why the power system is unable to guarantee a regular supply for other services besides space heating (such as lighting, electric appliances, different industrial operations and service sector);
- *Unrealistic electricity tariffs*. Many studies carried out by international and local institutions indicate that the long term marginal cost of electricity generation / transmission / distribution, taking into consideration the new plants / substations / lines that will be constructed to meet the increasing demand, is approximately 9.64 US cents/kWh (Electricity Tariff Evaluation Module prepared by the World Bank in January, 2003 and the average tariff for 2003 is 6.24 US cent/kWh. The difference between marginal cost and average tariff still is subsidized by the Government and yet remains a concern and it is foreseen to be such an barrier by the year 2007. KESH Action Plan of 2003-2005 approved by the Albanian Government and the Donors recommends the gradually increase of tariffs in order to improve the financial situation of KESH. According to the Action plan the average tariffs for 2003 are increased by 10% and for 2004 to be increased by 12.8%.

## I.1.2 Policy and legal framework

### I.1.2.1 Policy framework

A National Strategy for Energy has been drafted and approved in June 2003 by

the Government of Albania according to the Decision of the Council of Ministers, No. 424 dated 26.06.2003. The National Energy Strategy primarily aims at the restructuring of the energy sector based on market economy principles and developing a modern energy policy. A detailed plan of action also adopted on 19 September 2003 by the Albanian Government follows this strategy.

The strategy for the development of energy sector is a document that analyses and recommends the future changes by the year 2015 that must be undertaken in the Republic of Albania, in order to increase the security of the energy supply and the optimization of the energy resources to meet the demand and achieve the sustainable development. It is the first national strategy, which address explicitly the environmental issues like greenhouse gas emissions and urban air emissions. The strategy addresses the recommendations provided for the energy sector under the Albania's FNC. It is considered as a significant progress in mainstreaming the global environmental concerns into national sector planning and policy. This strategy is considered as an expression of the national demands which aim at sustainable development of the whole national economy and environmental protection during the whole cycle of the energy sources utilization.

The strategy for the development of energy sector is an essential part of the NSSD. The Energy Strategy considers the country obligations in the framework of the Regional Electricity Market in Southeast European countries, and international environmental conventions that Albania is a Party to, as well as the harmonization and converging of the energy sector development according to the EU Directives for the association of Albania in the European family.

The energy strategy analyses in details many key issues herein broadly discussed: should we focus more on imports in order to meet the future energy demands (construction of interconnection lines) or on the domestic generation (using the TPP or building new HPP, thus depending on climatic conditions); what should be the necessary steps for energy saving in the household, service and industry sectors; should we still continue to use electricity for space heating in private and public buildings (thus creating a deficit) or should we introduce alternative fuels (especially LPG); should we just import oil by-products, import crude oil and rehabilitate Ballsh refinery to meet the future demands for oil by-products or build a new refinery; which is the best feasible position and capacity for hydrocarbons stocking; which is the best option for the penetration of natural gas in the Albanian energy sector and the necessary investments; etc.

The strategy for the development of the energy sector includes technical, financial, economic, legal, organizational, institutional and environmental aspects as well as the continuous training of the specialists in order to prepare the necessary framework for an easy integration of the Albanian system into the regional and European energy systems.

Specific objectives of the National Energy Strategy are:

- Increase of the security and reliability of the energy supply in general and electricity in particular, in national and regional levels;

# I. ENERGY SECTOR

- Establishment of an efficient energy sector from the financial and technical aspects;
- Establishment of an effective institutional and regulatory framework and restructuring of energy companies;
- Increase of the energy efficiency in generation/production and final use of energy sources aiming a minimal environmental pollution;
- Optimization of the supply system with energy sources based on the least cost planning principle with minimal environmental pollution;
- Considerably increase of investments in the energy sector through capital enhancement by International Financial Institutions as well as private capital.

The strategy aims also at establishment of a competitive electricity market according to the EU requirements for the electricity sector reforms (Directive 2003/92 EU) and Albania obligations under the Athens Memorandums, respectively (November 15, 2002) and (December 17, 2003) to support the energy sector integration into the Southeast Europe Regional Electricity Market and the interconnection with the Union of Central Transmission of Electricity (UCTE) network.

Future energy scenarios are developed based on the well-known software namely Long -range Energy Alternatives Planning (LEAP). (See Box I.5). In order to provide the necessary analysis and realistic recommendations for the energy strategy in the Albania's conditions, this general energy model was adapted. The software was developed to illustrate the different scenarios by 2015 and the consequences of energy policies and their effects. The scenarios describe two limits within which the Albanian energy system will likely be developed. The scenarios describe the medium and long-term possibilities of the Albanian energy sector development based on future technological and economic forecasts for neighboring countries with similar economic development levels and climatic conditions.

## Box I.5.

*LEAP (Long -range Energy Alternatives Planning) is a scenario-based integrated energy - environment modeling system designed and disseminated by the Boston Centre of the Stockholm Environment Institute. Its methodology is based on a comprehensive accounting of how energy is consumed, converted and produced in a given region or economy under a range of alternative assumptions on population, economic development, technology, price and so on. With its flexible data structures, LEAP allows for analysis as rich in technological specification and end-use detail as the user chooses. At the heart of LEAP is the process of scenario analysis. Scenarios are self-consistent storylines of how an energy system might evolve over time in particular socio-economic setting and under a particular set of policy conditions. Using LEAP, scenarios can be built and then compared to assess their energy requirements, social costs and benefits and environmental impacts. For more information on LEAP visit the website: <http://www.seib.org/leap>*

Some of the main directions that illustrate the future energy trends in Albania are as following:

- The future energy system should be more consumer-oriented;
- The future power system should be very diversified as regards the use of all energy sources and technologies;
- The future energy system should be more decentralized;
- More attention should be focused on the efficient energy use;




# I. ENERGY SECTOR


- The technologies selected to meet the demands should be based on the least cost planning principle, supply reliability and environmental protection;
- The renewable energy resources (solar, wind, biomass and especially small HPPs) should be stimulated for a maximal use of indigenous resources, based meantime on the least cost planning and environmental protection principles.

Figures I.8 and I.9 show two scenarios one for the total energy demand in general and another for the electricity. As per the electricity demand, according to the active scenario by the year 2015, the energy savings are expected to be around 22.48% of the total energy consumption. The contribution in these savings by 2015 shall come from transport sector with 27.28%, industry with 24.58%, agriculture with 24.67%, service with 17.86% and residential sector with 7.4% of the total savings, respectively.


Figure I.11 shows electricity savings according to different energy efficiency measures and analysis shows a level of electricity savings of 3056 GWh in 2015, with the main contribution from reduction of technical losses followed by savings in service, residential and industry.

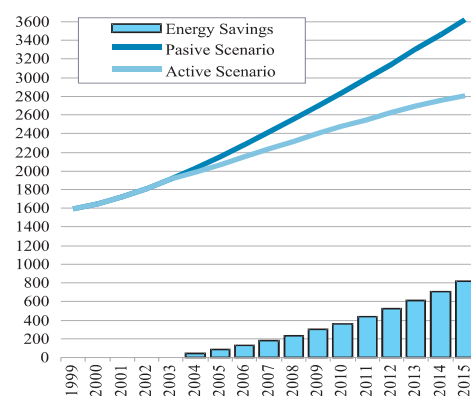


**Figure I.8:** Forecast of energy demand and energy saving (ktoe)

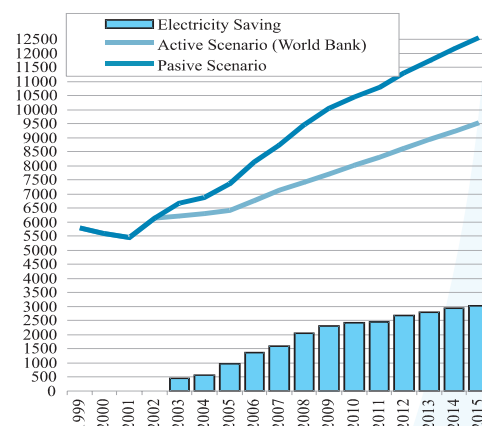

**Figure I.9:** Forecast of electricity demand and electricity saving (GWh)

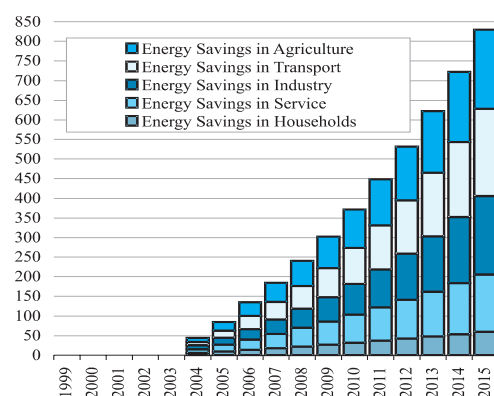

**Figure I.10:** Energy saving in each sector according to active scenario compared to passive scenario (ktoe)

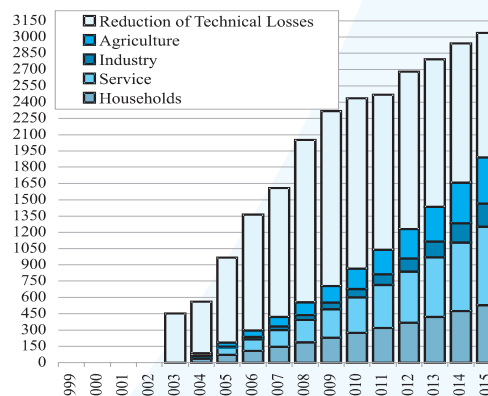


**Figure I.11:** Electricity saving in each sector according to active scenario compared to passive scenario (GWh)

# I. ENERGY SECTOR


As per the CO<sub>2</sub> emissions released from the energy sector the analysis shows that according to the active scenario a reduction of 4 million ton of CO<sub>2</sub> will be achieved as a result of implementation of all energy efficiency measures and increased share of the renewable energy sources utilization. Figure I.12 shows the reduction potential of CO<sub>2</sub> emissions released from energy sector. The analysis demonstrates that the development of energy sector according to the Passive Scenario will lead to a growth of the energy consumption per capita by 38.1% (an advantage), but in the same time it will increase significantly the energy intensity by 14.1% (a disadvantage) in the year 2015.

The trend of both above indicators according to the Active Scenario is in the right direction because by 2015 the value of energy intensity is expected to be 20.01% lower than in 2005 (an advantage) and the value of energy consumption per capita is expected to be increased by 16.5% compared to the year 2005 (an advantage as well). Therefore, all actions should be undertaken to ensure that the Albanian energy system is to be developed according to the Active Scenario. In other words, the Albanian economy will consume less energy to produce the same output unit becoming more competitive and gaining more markets, creating more jobs and providing a higher welfare. The trade deficit will be reduced as well enabling the use of financial means for different investments in the Albanian economy.

The analysis shows that both indicators (CO<sub>2</sub> emissions per capita and that per the produced GDP) will be increased for the Passive Scenario, demonstrating that this scenario is unacceptable from the environmental point of view. By the year 2015, the emissions per capita are expected to increase by 84.8% while the CO<sub>2</sub>/GDP indicator is expected to increase by 53.4% compared to the year 2005. As regards the Active Scenario, a development towards the right direction is expected, accompanied by a decrease of CO<sub>2</sub>/GDP indicator by 19.3% and an increase of CO<sub>2</sub>/capita indicator by 20.5% compared to year 2005. The increase of the second indicator is not a positive sign, but it should be highlighted that the emissions are expected to be decreased by 64.3% compared to the Passive Scenario.

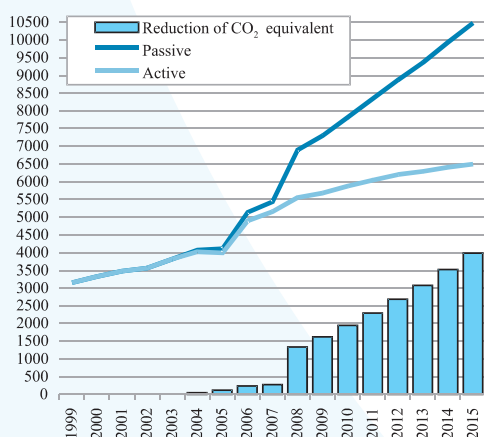


**Figure I.12:** CO<sub>2</sub> emission for each scenario and their reduction based on LEAP (1000 ton)

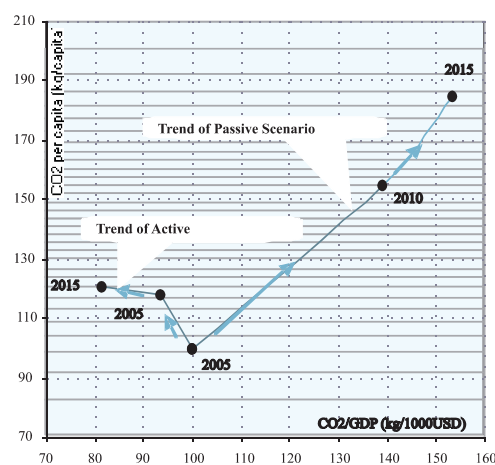

**Figure I.13:** Trend of emission intensity and emission per capita according to the Passive and Active Scenario

# I. ENERGY SECTOR

As per the renewable energy, by 2015, according to the active scenario (Figure I.14) it is expected a higher ratio of renewable energy versus the total energy supply.

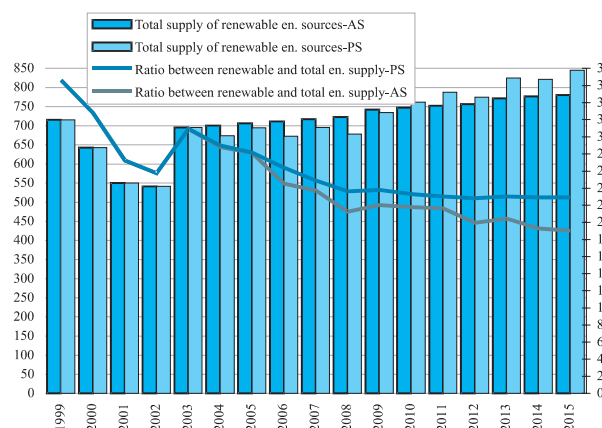

**Figure I.14.:** Renewable energy supply versus the total energy supply. The active and passive scenario.

A set of measures to be undertaken which increase the energy efficiency in all consumption sectors are considered and analysed from the cost-benefit point of view as follows:

- Substitution of electricity for space heating and cooking with LPG and other alternatives;
- Thermal insulation of the existing stock of public buildings based in a new building code;
- Promotion of the solar energy use for hot water supply in households and services;
- Promotion of the central heating and district heating and CHP in services, industry and households;
- Promotion of the efficient lighting in households, services and industry;
- Substitution of coal, fuel wood, residual fuel oil with heavy fuel oil in boilers/furnaces;
- Increase of energy efficiency for existing stock of boilers/furnaces in industry and services;
- Improvement of the power factor in industrial enterprises;
- Promotion of public transport;
- Increase of the energy efficiency in agriculture sector in general and irrigation in particular;
- Rising public awareness for the efficient use of energy in services, households, industry transport and agriculture sector.

## I.1.2.2 Legal framework

### I.1.2.2.1 Energy Legislation

A legislative framework on energy in Albania comprises a relatively large number of different pieces of legislation at present. However, it has to be emphasized

that until today there is no existent umbrella law that covers the primary objectives of the Albanian energy policy and basic principles for the whole energy sector in the long-term. On 26 May 2003, the Albanian Parliament adopted Law on Power Sector and has also expressed the willingness to develop the Law on Energy Efficiency and Renewable Energy Sources. This draft Law on Energy Efficiency and Renewable Energy Sources fills the gap in the legal framework for energy sector in Albania. Also the foreign investments legislation is expected to have an impact to the energy sector. A more detailed analysis of the current legislation is given as follows:

- Law on Power Sector: The Law on Power Sector, No. 9072 of May 2003, abolishes the above two laws and combine them in one. This law guarantees the conditions of electricity supply to the consumers, efficient functioning of electricity market and adjust better the Power Sector to the condition of market economy. The overall aim of the Law on Power Sector is to enhance the economic effectiveness and the quality of services for power generation, transmission and distribution and to provide a transparent and comprehensive legal framework for the mentioned activities.
- Law on Electricity: The Law on Electricity, No. 7962 of July 1995, specifies the conditions of the activity in the power sector and the rights and duties of all natural and juridical persons involved in one of these activities. It also regulates the relationship between consumers and suppliers in terms of their basic duties and obligations. The Law provides for operational and technical management of power network as well as for connections to the network and measurements of electricity.
- Law on Regulation of Power Sector: The Law on Regulation of Power Sector, No. 7970 of July 1995, provides for the establishment of the Energy Regulatory Entity (ERE) in the power sector and defines its duties. According to this law ERE is responsible for tariff regulation and licensing in the power sector.
- Law on Energy Conservation in Buildings: This law, No. 8937 of September 2002, defines that the designing and construction of buildings should meet the necessary technical parameters for conservation, saving and efficient use of energy. All buildings that will be constructed (after this law is effective), shall observe the normative volumetric coefficient of thermal losses (Gv), which means that thermal losses should be limited, as well as provide for a thermal installation for central or district heating.
- Governmental Decree on Energy Building Code: The Energy Building Code was elaborated since 1998 from the NAE in collaboration with the Albania-EU EEC and the other institutions of the sector. The Governmental Decree, No. 38 of January 2003 approves it as “Norms, Rules and Conditions for Design & Construction, Production & Conservation of Heat in Buildings”.

- Governmental Decree on Strategy of Energy: The Governmental Decree, No. 424 of June 2003, approves the National Strategy of Energy until 2015. According to this decree, the Ministry of Industry and Energy and the NAE are appointed to update this strategy every two years.
- Law on Electrical Police. Based on this law No.8637, of July 2000 a specialized executive body for controlling the enforcement of legislation and the use of electricity, namely the Electrical Police was established. The pur-

pose of such a structure is to monitor and punish the abuses in the power sector; particularly the abuses with electricity consumption are highlighted as a necessity.

- Draft Law on Energy Efficiency and Renewable Energy Sources. This Law has a special focus on promoting the energy efficiency and energy conservation, creation of an energy efficiency fund, energy efficiency labeling, and promoting energy audits schemes. It has been elaborated since February 2004 and is under reviewing process by different Parliamentary Commissions. It will be considered by the Albania's Parliament at end of April 2004.

## I.1.2.2.2 Foreign investments legislation


- Law on Foreign Investments: The Law covers any kind of foreign investments in Albania and specifies the basic conditions for promotion and protection of foreign investments in Albania. The Law provides for non-discriminating treatment, full protection and dispute settlement in accordance to international standards. According to Article 2 of the Law on Foreign Investments no foreign investments are made prior to authorization. In addition, the foreign investor has the rights to employ foreign citizens and to transfer all assets that are related to foreign investments out of the territory of Albania. A limitation to foreign investors is only imposed to land ownership rights. Generally the Albanian Law on Foreign Investments is a tool that creates highly favorable conditions for the promotion of foreign investments.
- Law on Concession: The Law defines the legal basis for domestic and private sector participation in the provision of public services and infrastructure through concessions and other arrangements (leasing, management contract, service contract, and so forth). Among other sectors of economy, the law covers also the whole energy sector.
- Law on Free Zones: This Law provides for the creation of the free zones in which the investors are exempted from duties and taxes.

## I.1.3 Overview of the work done under the Albania's First National Communication

Albania's FNC is the first accomplishment of the Government of Albania as a Party to the UNFCCC developed under the UNDP-GEF project: "Enabling Albania to prepare its FNC in Response to its Commitments to UNFCCC". It consists mainly of: (i) a country report of GHG emission inventory for 1994; (ii) a GHG abatement analysis by the year 2020; (iii) a climate vulnerability study and adaptation options.

# I. ENERGY SECTOR

According to its FNC, Albania is a relatively low net emitter of greenhouse gases [7,061.45 Gg], where energy sector shows a significant contribution [44%] mainly due to the fuel combustion category, followed then by agriculture [27.12%], and Land Use Change and Forestry (LUCF) [21.60%]; Waste [4.81%] and Industrial Processes [2.96%] (see Figure I.15).

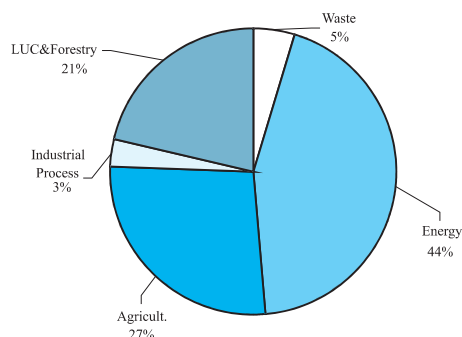

**Figure I.15:** CO<sub>2</sub> (eqv.) emissions from economic sectors [7061.45 Gg], 1994.

Estimates from the Albania's FNC show that the CO<sub>2</sub> is the most significant contributor [66%] followed by CH<sub>4</sub> [30.49%] and N<sub>2</sub>O [4.19%]. The biggest share of CO<sub>2</sub> emissions due to fuel combustion activities comes from the energy sector [62.95%], which itself contributes through the industry sector (manufacturing industry and construction) [35%], followed by the transport sector (road transportation) [27%], energy industries [20%] etc. The Albania's FNC highlights the contribution of each fuel type towards the CO<sub>2</sub> emissions coming from fuel combustion activities. Estimates show that the main contributor is oil [87.3%], followed by lignite [11%] and the last one natural gas [1.7%].

A relatively low level of CO<sub>2</sub> emissions [1.97 ton/capita] is estimated. The main reason of that low level of emissions is explained due to the fact that more than 90 % of electricity is generated by hydro energy sources. Emissions per GDP show relatively high levels [3758 ton/million USD] mainly due to the low level of productivity, out-of-date technologies and high level of consumption of electricity by the residential sector.

Under the Albania's FNC, specifically under the GHG inventory preparation the key source categories are estimated. Estimates are made based on IPCC Good Practice Guidance and Uncertainty Management in National GHG Inventories. The IPCC methodology prioritizes quantitatively the key sectors according to their significant contribution (up 95%) to the global warming potential. Two significant key source categories, which fall under the energy category, namely CO<sub>2</sub> emissions from fuel combustion in industry [14.24 %] and CO<sub>2</sub> emissions from mobile combustion [11.24 %] are identified. Being the key sources these two categories remain an object of the quality improvement because of the missing activity data for years other than 1994. Activity data for both categories are characterized from variability among '90s due to the changes in the development of transport and the industry sector. Actually, after the year 1990 both of these sectors passed through a drastic change: the road transport was characterized by a rapid development while industry was characterized by a collapse and shifted from heavy to light, construction industries. These changes were reflected to changes in the fuel consumption structure and quantity by each sector. Activity data for each category were found for the base year (1994) only



and in aggregation form for the sector as a whole but this did not reflect the real situation. The need for disaggregated data and time series was highlighted<sup>7</sup> by the national team of the GHG inventory because more accurate national GHG inventories means better national strategies to mitigate GHG emissions.

Based on the predictions<sup>8</sup> made through a baseline (business-as-usual) scenario for future emissions, it is expected that by the year 2020 the emissions total to be raised more than 5 times [37653 Gg]. The abatement scenario of emissions foresees the introduction and implementation of different options mainly focused on energy saving and energy efficiency measures.

Referring to the GHG emissions baseline scenario, it is expected that most of CO<sub>2</sub> emissions will be released from the energy and transport activities, which in 2020 will account for 83% of the total. Concerning energy consumption side, the Abatement GHG Emissions Scenario assumes the gradual implementation of energy efficiency measures in the industry, household, service and transport sectors. Concerning the energy supply side, the share of renewable sources in Albania that has contributed about 18-22% in the primary energy balance, mainly due to the utilization of hydro sources is expected to be higher through the penetration of the solar energy as well.

A set of 22 GHG abatement measures for the energy and transport sector (see Box I.6) is proposed in the frame of this study, which are then analyzed in terms of the cost and benefit. Even the rate of penetration is calculated. These measures are addressed in the National Climate Change Action Plan, which is a part of the revised NEAP already adopted by the Government of Albania in 2002.

## Box I.6.

### GHG Abatement Measures for Energy and Transport Sector

1. Introduction of the thermal insulation in households which use fuel wood as energy source to meet space heating demand;
2. Introduction of the thermal insulation in households which use LPG as energy source to meet space heating demand;
3. Improvement of the power factor in industrial & service consumers;
4. Introduction of the thermal insulation in households which use electricity to meet space heating demand;
5. Introduction of the thermal insulation in households which use kerosene to meet space heating demand;
6. Introducing gas-taxies instead of gasoline taxis;
7. Introduction of the efficient lighting (incandescent lamps instead of fluorescent ones) in households/service/industry;
8. Improvements of the efficient boilers which use heavy fuel oil/diesel as fuel;
9. Improvements of the efficient boilers which use coal as fuel;
10. Introducing thermal time switches in electric boilers (for DHW) in household sector;
11. Introducing prepayment meters in household sector;
12. Introducing wind turbines instead of diesel generators;
13. Introducing HPPs instead of heavy fuel oil power plants;
14. Introduction of the thermal insulation in households which use heat (from DH plants) as energy source to meet space heating demand;
15. Introducing efficient electric motors in industry/service sectors;
16. Introducing efficient refrigerators in household/service sectors;
17. Introducing solar water heaters instead of electric boilers;
18. Introducing mini HPPs instead of diesel generators;
19. Introducing landfill gas plants with 70% recovery;
20. Introducing gas power plants instead of heavy fuel oil power plants;
21. Introducing PV electricity instead of diesel generators;
22. Introducing solar PV water pumps instead of diesel pumps.

Albania's First National Communication to the UNFCCC.


<sup>7</sup>Attempts are being made on that issue through a regional project initiated by UNDP-GEF National Communication Support Unit and funded by GEF, namely: "Building capacities to improve the quality of the GHG inventories (East Europe and CIS)"

<sup>8</sup>The methodology for scenario development is LEAP version 1995.




# I. ENERGY SECTOR

Figure I.16 shows the GHG reduction potential of the energy sub-sectors, expressed in million ton of CO<sub>2</sub> equivalent. Predictions show that abatement measures introduced in energy consumption industries are expected to have the most significant impact on the reduction of GHG emission from six economic sectors taken into consideration. The industry is then followed by household and energy transformation sector. This shows once more that introducing measures in the demand side management gives more results in terms of the abatement of GHG emissions than measures introduced in the supply side (energy transformation sector).

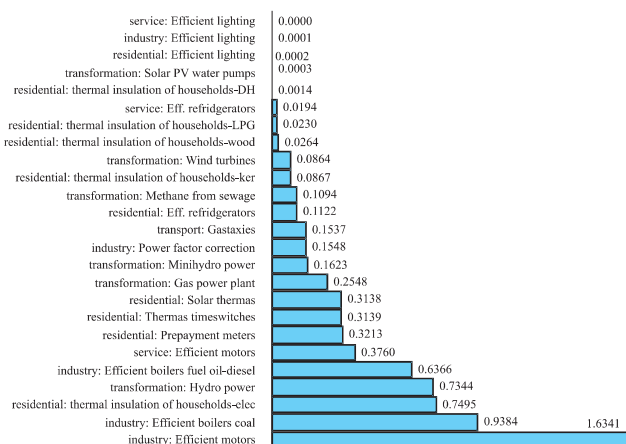

**Figure I.16:** All energy and transport measures ranked in decreasing order as per the reduction potential [Million tons of CO<sub>2</sub> eqv]

The curve of the marginal cost versus total CO<sub>2</sub> equivalent reduced can be seen in Figure I.17.

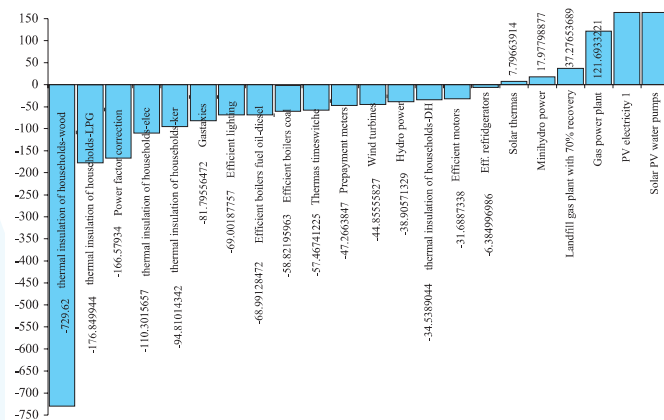


**Figure I.17:** Marginal abatement cost versus total CO<sub>2</sub> emissions to be reduced for all proposed measures [USD / CO<sub>2</sub> eqv]

## I.1.4 Take the stock of technologies currently in use

The following section provides a stocktaking analysis of the technologies currently in use in Albania such as those of electricity generation (HPP, TPP, solar); power transmission, distribution network, energy consumption (households, services, transport), and energy consumption industries.

## I.1.4.1 Hydro power plants

The Albanian power system relies practically only on hydropower plants (over 90%) and therefore it is totally dependent on hydrological conditions, which means that it is vulnerable and unreliable. It is important to point out that the Drini River cascade production system can supply the installed yearly capacity only if the cascade accumulation basins are refilled fully six times per year. During the last two seasons, water inflow was the lowest ever recorded, so refilling of the basins has been far below the requirements. In a normal year, total power generation would be about 4300 GWh (million kilowatt-hours). There is no new generating capacity, hydro or thermal, under construction, but there is a specific plan to construct a Combined Cycle Gas and Steam Turbine TPP with an installed capacity of 135 MW. Currently KESH has signed a loan agreement with the World Bank, the European Bank for Reconstruction and Development and the European Investment Bank of total amount of 112.6 Million USD. Albania has a major hydropower potential of which only 35% so far are being exploited. The hydro capacity installed up to now is 1446 MW. The average production from hydro is 4300 GWh/year. Electricity generation and imports of Albania (GWh) for the period 1985-2000, are shown in Figure I.18.

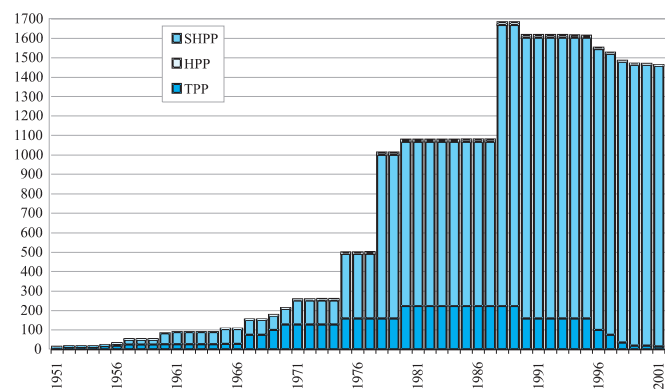

**Figure I.18:** Installed Generation Capacity of ALBANIA (MW).

The three largest HPPs form a cascade with an installed capacity of 1350 MW on the Drini River in the north of the country: Fierza (4 x 125 MW) which acts as a head pond with a limited inter annual regulating effect, Komani (4 x 150 MW) and Vau i Dejes (5 x 50 MW). At the following are described three main HPPs of Albania.

- **Fierzë HPP** is located in the Drini River Valley, near the village of Fierzë about 20 km from the town of Bajram Curri. The HPP was built in the period from 1971 to 1978. The Fierzë dam is designed as a zoned rock-fill embankment dam with a clay core. The maximum dam height above foundation is 152 m. The reservoir created by the dam serves as the head pond for the Drini River cascade. With a total storage of 2.7 billion m<sup>3</sup>, it is adequate for annual regulation. The powerhouse with its four 125 MW Francis units is located at the downstream toe of the dam. Its average annual energy output is 1328 GWh.

The water intake system consists of 4 tunnels driven through the left abutment. For the discharge of floods, two spillway structures are provided, each consisting of an intake tower and an adjacent outlet tunnel with a length of about 800m.

**Koman HPP** is located in the Drini River Valley, between Fierzë and Vau i Dejës HPPs, and about 2 km from the Koman village. The HPP was built in the period from 1980 to 1988. The Koman dam is designed as a rock-fill dam with concrete facing. The maximum dam height above foundation is 115 m. The powerhouse with its four 150 MW Francis units is located at the downstream toe of the dam. Its average annual energy output is 1500 GWh. The water intake system consists of 2 tunnels driven through the right abutment followed by 4 steel lining tunnels after the surge shaft. For the discharge of floods, two spillway structures are provided, each consisting of an intake tower and an adjacent outlet tunnel. Power factor is 29%.

- **Vau i Dejës HPP** is located in the lower part of the Drini River Valley, about 18 km from the city of Shkodër. This HPP was built in the period from 1967 to 1971. The HPP comprises three separate dams, Qyrmaq, Zadeja and Ragam. The powerhouse with five 50 MW Francis units is located at the downstream toe of the Qyrmaq dam. Its average annual energy output is 880 GWh. The water intake structure is incorporated into the gravity Qyrmaq dam body and 5 short outdoor pen-stocks connect it with the units. For the discharge of floods two spillway structures are provided, one is located on the Qyrmaq dam and the other one is located on the Zadeja dam. Plant factor is 40%.

**Drini River** is the first largest river system in Albania. As known, locations for the two additional plants have been investigated in completion of the hydroelectric potential on the Drini River within Albania, i.e. Skavica upstream and Bushati downstream of the existing development.

**Vjosa River** is the second largest river system in Albania. Its upper catchments include areas in Greece's Northern Pindos Mountains with high precipitation. Until now, the hydroelectric potential has not yet been exploited. The Hydrogeotechnic Institute established the latest river development study. After having investigated numerous variants, the study defines 7 HPPs for the complete exploitation of the Vjosa River.

**Devoll River** with its maximum catchments area of around 3500 km<sup>2</sup>, located completely on Albanian territory, is the third largest Albanian River system. Its upper catchments is situated in the area around Korçë. Up to now the hydroelectric potential of the Devoll River has not yet been exploited.

Until the year 1988, in Albania are constructed 83 small HPPs, with capacity from 5 to 1200 kW; their total power capacity is 14 MW and in a normal year they can generate round 200 GWh of electricity. First of all, the aim of these HPP' construction has been the electricity supply in the deep mountainous areas; nowadays all HPPs are connected with the country's energetic system. These small HPPs are principally derivation types and they use sources and water running next to these areas. Most of HPP' machines and equipment are

supplied from the following countries: Austria, Germany, China, Hungary, Italy, some parts are also produced in Albania. The turbines' types are Francis, Pelton, and Banki. The generators' type is Sincron with low voltage. Average age of these small hydropower plants is around 25 years old.

The development of a program on the operation of existing small HPPs is a part of the energy policy of Albanian Government, while their privatization might put them again in efficiency. Taking into consideration their medium age (25 years old), running hours of operation machines, maintenance, qualification of workers, and the transit period that our country is passing as well; for the most of small HPPs to put in use considerable investments are needed. From the studies already performed only 19 small HPPs could be economically refurbished at a total cost of USD 7.3 million.

## I.1.4.2 Thermal power plants

All the equipment of the thermal power plants is old, ageing and heavily corroded. The plants are almost at the end of their technical lifetime and cannot be reactivated. Out of eight TPPs installed in Albania, only the power plant in Fier is still partially in operation. The eight stations consist of the two larger plants in Fier and Ballsh and six smaller plants at Tirana, Cërrik, Vlorë, Kucovë, Korçë and Maliq. Details of these smaller plants which are at the end of their technical life-time and out of service since long time can be seen in table I.9 below.

<i>Table I.9: Retired Thermal Power Plants in Albania.</i>								
No.	Name	Region/ Area	Commis- sioning Date	Shut- down Date	Capacity Units / MW	Fuel Used	Fuel Supply (truck, pipeline etc.)	Remarks
1	TPP Tirana	Tirana	1951	1994	3 x 35 t/h	Coal	Truck and railway	
					1 x 2,5 MW			
					1 x 2,4 MW			
2	TPP Cërrik	Elbasan	1956	1992	2 x 35 t/h	Coal	Truck and railway	
		Cërrik			2 x 3,5 MW			
					1 x 1,5 MW			
3	TPP Vlore	Vlore	1953	1991	3 x 12 t/h	Coal,	Truck	
					2 x 1.5 MW	Gas	Pipeline	
4	TPP Kucori	Kucove	(1934; 1941)		1 x 12 t/h	HFO (Mazut)	Pipeline	Refinery not
			1954	1993	1 x 18 t/h	Fuel oil		in service
			1960	1993	1 x 35 t/h	(S-cont. 6%)		any more
					1 x 3,6 MW	Gas		since 1993
					1 x 2 MW			
5	TPP Korce	Korce	1971	2000	2 x 35 t/h	Coal	Truck	Mainly
					1 x 6 MW			for reactive
								power
6	TPP Maliq	Maliq,	1951	2000	1 x 35 t/h	Coal	Truck	Mines are
		Korce	1960	2000	1 x 20 t/h			closed
			1987	2000	3 x 12 t/h			
				2000	1 x 4 MW			
				2000	2 x 1,5 MW			

# I. ENERGY SECTOR

The Ballsh power station was built in the period 1974-1976 and is located on the premises of the Ballsh Refinery ARMO. The station is (since 1996) the property of ARMO and consists of four boilers (4 x 120 t/h) and two turbines (2 x 12 MW). The plant provides only process steam for the nearby refinery and has already stopped working for electrical generation since 1996. According to the Lahmeyer Study dated June 1995, the Ballsh Power Station at that time was already in urgent need of rehabilitation. During the investigations in March 2002, it was confirmed that no major investment or maintenance was done by KESH since that time therefore, the condition of this plant must be considered unfit for rehabilitation.

The Fier Power Station was built in two stages. In the period from 1966 to 1969, the first stage was build up and commissioned. This equipment is of Chinese design and consists of six boilers and a common steam header from which the steam is supplied to the five condensing steam turbines. Three cooling towers and two chimneys are part of this first stage. The second stage, commissioned in 1980, is supplied by Czechoslovakian manufacturers and rated at 60 MW. This unit is designed as “block system” and consists of one drum type boiler, one condensing steam turbine, two natural draft cooling towers, and has its own chimney. The efficiency of this unit is assessed to be better than that of the Chinese part due to the higher steam parameters (temperature and pressure). The total installed generating capacity at Fier TPP was 159 MW. The following table gives information on:

<i>Table I.10: Total Annual Electricity Generation of Fier TPP per Unit (MWh).</i>						
Boiler Type	1996	1997	1998	1999	2000	2001
Chinese Boiler No. 1	22 800	40 694	49 721	14 058	24 300	26 072
Chinese Boiler No. 2	4 856	0	23 940	67 232	0	57 349
Chinese Boiler No. 3	44 131	30 354	0	0	0	18 280
Chinese Boiler No. 4	0	32 143	7 850	30 092	37 800	0
Chinese Boiler No. 5	0	0	0	0	24 100	0
Chinese Boiler No. 6	0	0	0	0	0	0
Subtotal Chinese Boilers	71 787	103 191	81 511	111 382	86 200	101 701
Czechoslovak Boiler	76 690	22,066	0	0	57000	35 055
<b>Total</b>	<b>148 477</b>	<b>125 257</b>	<b>81 511</b>	<b>111 382</b>	<b>143 200</b>	<b>136 756</b>

The net calorific value of the residual oil (with the Albanian nomination “Mazut” or Residual Fuel Oil ) used as primary fuel was kept constant over the years. According to the information received from KESH, the average value is 38.5 MJ/kg. This value is slightly lower compared with the international average of 39.8 MJ/kg. The Fier Power Station equipment is of Chinese design and consists of six drum type front-fired boilers with natural circulation (2 x 75 t/h, 4 x 120 t/h, all 39 bar, 450°C) and five condensing steam turbines (2 x 12 MW, 3 x 25 MW). The two smaller turbines are equipped with extraction points to supply process steam to the nearby refinery and fertilizer plant (100 t/h at 10 bar/300°C, 80 t/h at 2.5 bar/180°C). However, the fertilizer plant has been closed down. The common supply steam header is equipped with a pressure reducing station, which can likewise supply steam to the refinery.

Fier is the largest TPP in Albania and the only one remaining in operation, however, only at an available capacity of 8 MW. The total operating hours of the boilers and steam turbines for the first stage varies from 100000 to 170000 hours, while those of the second stage are approximately 28000 hours.

American Company Harza together with the NAE and KESH has carried out a feasibility study for the rehabilitation of Czech unit according to international standards for air emissions.

### I.1.4.3 Solar energy


Despite of the high potential of solar energy exploitation there are few examples of utilization of this technology in Albania. The largest system currently operating in Albania consists of three sets of panels totally 48 [m<sup>2</sup>] that are installed on the roof of the Hospital No 5 in Tirana to provide hot water supply for personal hygiene.

Solar systems, designed for heating water, are made up of the following parts:

- the solar collector area;
- the hydraulic circuits and heat exchanger;
- the hot water storage tank;
- the back-up heating system.

The conventional “flat plate” solar collector consists of an absorber plate with its hydraulic circuits fixed behind a sheet of glass in a watertight case. As these collectors are used throughout the year an antifreeze fluid is generally required. Therefore, the solar installation needs to have two independent hydraulic circuits linked by a heat exchanger:

- The “primary circuits” is the circuit flowing through the collectors using an anti-freeze heat transfer fluid;
- The “secondary circuit” is the domestic hot water circuits flowing through the heat exchanger to the hot water storage tank.

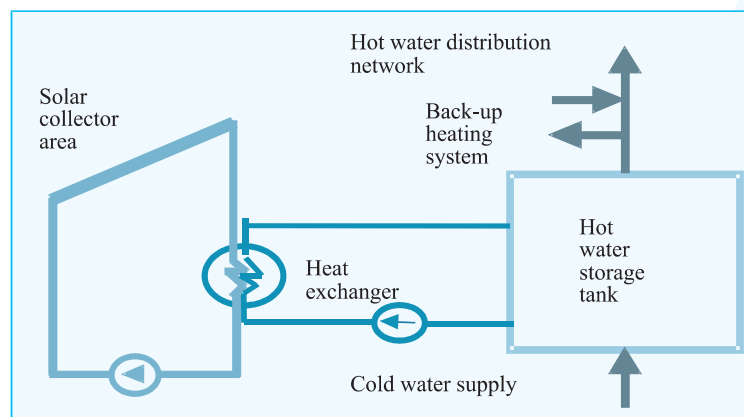

**Figure I.19:** Schematic layout diagram for collective SHW



## I.1.4.4 Power transmission system

The Albanian Power System is experiencing serious operating problems due to insufficient development of its main-transmission and sub-transmission and lack of real rehabilitation and reinforcement of its facilities during the last fifteen years. This has significantly reduced the operating reliability and the quality of electricity supplied and has limited the exchange capability with neighboring countries. The major existing problems are:

- Overloading of some 220 kV transmission facilities, resulting in heavy losses, bad voltage profile and power outages;
- Low reliability and availability in the transmission system, because it is very rigid and cannot operate according to the n-1 criteria;
- Lack of possibilities to operate optimally and unbalanced reactive power requirements;
- Most of the equipment in 220/110 kV substations are very old and suffering from poor maintenance and lack of spare parts;
- Limitation in transmission network for exchange of electricity with neighboring countries;
- Outdated system control and very deficient communications facilities threatening the system safety and security.

The 220 kV substations are mostly of a classical layout with double busbar for 220 kV and single busbar for 110 kV and 35 kV. Due to recent international financing, some modern SF<sub>6</sub>-gas insulated switchgear is installed in a few substations. The old equipment as switchgears, disconnection switches, and voltage and current transformers causes many faults. The substations suffer by a non effective measuring system as well. In general the 220 kV transmission lines are fully loaded under normal conditions, except two critical lines as Elbasan1-Elbasan2 and the Vau Dejes-Komani, which are overloaded during normal conditions. During the peak load the n-1 conditions are not satisfactory, because of the overloading of many lines and transformers. In the same time the most of the installed transformers in the substations are working already fully loaded and some of them even overloaded.

Most of the equipment in the 220 kV substations is of older manufacture. Many substations as a result require substantial rehabilitation. However, spare parts are no available. Furthermore, there has not been adequate rehabilitation, reinforcement and development of the transmission facilities to meet current requirements. This situation has persisted for fifteen years resulting in serious reliability problems and uneconomical operations. Therefore, the needs for rehabilitation and reinforcement of existing substations, construction of other new 220 kV lines and new substations 220/110 kV or 400/220 kV are indispensable and very important for short term upgrading and long term development of the main transmission network.



## I.1.4.5 Distribution networks, rehabilitation and upgrading program

### I.1.4.5.1 Lines

The present power distribution facilities of Albanian Electric Power System serve over 715000 industry, commercial, and residential customers thorough Albania. The current population of Albania is around 3100000 people. The average number of users per square kilometer is approximately a third of typical populated countries, and the number of inhabitants per square kilometer about half. These lower users and population densities require greater investment per customer. The primary cables and overhead feeders of the distribution system are either 6 kV or 10 kV or 20 kV. The summary data of the medium voltage network (6, 10, 20 kV) for year 1999 are given on the table I.11 below:

<i>Table I.11: Characteristics of the medium voltage network</i>					
Medium Voltage 6kVfeeder		Medium Voltage 10kV feeder		Medium Voltage 20kV feeder	
Overhead lines km	Cable lines km	Overhead lines km	Cable lines km	Overhead lines km	Cable lines km
2590	252	5453	154	0	112

The distribution facilities are supplied primarily from the 110 kV and 35 kV sub transmission system, which in turn is supplied from the 220 kV and 110 kV systems. A small part of the distribution system is supplied directly from the transmission system 220 kV (transformation range 220/120 kV). This part of the distribution network is constructed after 1995.

### I.1.4.5.2 Distribution

Present distribution facilities are in extremely poor conditions due to the long period of isolation as well as the poor economic conditions of the country. The distribution equipment obtained from the former Soviet Union up to the 1963 and from China as well starting from 1963 is in the most part 30 to 40 years old and to a large degree obsolete. Extreme overload conditions resulted during the severe winter of 1992 and continue up to date when electricity for space heating is used extensively, which before had been restricted owing to the lack of electric heaters and other home appliances. At the same time, there was a wide spread tampering of the metering and supply facilities that lead to an estimate of 53% losses of the total supply to the Distribution System at the end of 1999, with about half of the losses being non technical. These conditions resulted in extensive damage to the distribution facilities, particularly in the main cite. Approximately 30% of the existing 110/10 35/10 and 110/6 35/6 kV transformers were destroyed, many substations were set on fire and a large number of low voltage (LV) cables were damaged. The technical losses of those facilities that remained in operation were and remain still four to five times higher than normal due to extensive loading conditions.

### I.1.4.6 Energy technologies in household/service sectors

The energy consumption of the household/service sectors is divided into four parts described as basic energy uses with widely differing characteristics: space heating, air conditioning, water heating, cooking lighting and electric appli-

ances. It is known that the domestic household/service sectors in Albania are one of the important energy consuming sectors. Their importance is highlighted by the fact of consuming large quantities of electricity, fuel wood, LPG and kerosene, which have contributed to the country's last energy crisis. Up to 1990 the supply and demand for heating, cooking, domestic hot water and fuels balance (mainly wood) were more or less in balance. After 1990s, there was a large reduction of fuel wood supplied by the state enterprises to the urban area. As a result there was an over cutting of trees (much of which illegal) overloading the electricity distribution system and causing huge problems to the environment.

Due to the collapse of industries and the increasing energy consumption by households in particular, the demand for electricity, the household/service sectors now occupies a growing share of the energy consumption that is more than 60% of the total energy demand and 62% of the electricity demand. Another pronounced trend is that a growing share of the each individual household's energy consumption is assigned to space heating, air conditioning (especially in service sectors) probably as much as 30-40% and at the national level some 61% of the space heating demand is covered by electricity.


Five variables are particularly significant in evaluating the demand for space heating and air conditioning: the household volume (which as known varies from the area of living and the height of the houses), the heating and cooling degree-days, the thermal conductivity of walls, roofs (adding the ventilation losses through windows and doors) and the heating hours. Statistics show clearly that Albania is in the last position in comparison to countries with regard to the indicator of the living square meters area per capita. Houses currently being built on a self-basis rarely abide by the existing housing norms of height of ceilings and surface use and are considerably larger than the average figures indicated above. Of course a large house in volume and area will mean an increase of energy demand for space heating.

The thermal conductance of dwellings reflects the heat losses from the houses into the surrounding atmosphere and depends on a number of factors among which the most important are the surfaces (walls and roofs) in direct contact with the outside air, the construction materials, the size and characteristics of the windows and doors. Houses made of bricks and thick walls, typically the majority of Albanian houses, have thermal conductance ranging between 0.872 [ $\text{W/m}^3 \text{ K}$ ] for large buildings or apartments and 2.151 [ $\text{W/m}^3 \text{ K}$ ] for detached single houses. The average approximate values for the early '90s are 1.51 [ $\text{W/m}^3 \text{ K}$ ] and 2.08 [ $\text{W/m}^3 \text{ K}$ ], respectively in urban and rural areas, with an average of 1.86 [ $\text{W/m}^3 \text{ K}$ ] over the whole housing stock. These values, however, do not account much for heat losses due to poor maintenance, holes in the walls, broken or inexistent windowpanes, etc.


This may seem quite high as an overall average, but large apartment buildings are probably the only way to accommodate the strong urban inflow, short of introducing barriers to internal migration or creating sprawling slums to the city outskirts. With these assumptions the thermal conductance decreases by almost 20% as an average over the whole housing stock to reach about 1.55 [ $\text{W/m}^3$

K]. The decrease will come essentially due to introduction of the new energy code for the new stock of buildings in the urban sector where increasingly large apartment buildings lead to an average conductance of only 1.22 [W/m<sup>3</sup> K] in 2010. On the other hand it is imperceptible in the rural sector where households continue to be large single-family units with thermal conductivity's averaging a relatively high 2.09 [W/m<sup>3</sup> K].

Albanian families are using electric radiators in the most of the cases for ensuring space heating and DHW.

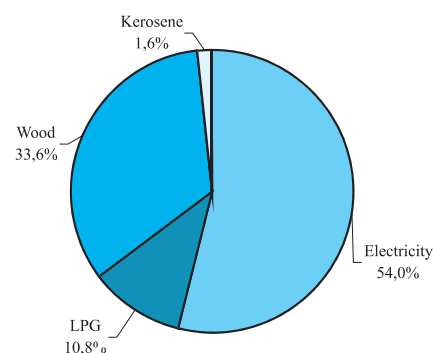


**Figure I.20** Appliances used for space heating in the household sector (in percentage)

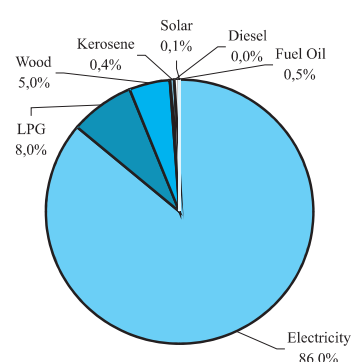

**Figure I.21** Appliances used for DHW in the household sector (in percentage)

After 1990, there was a large reduction of kerosene and fuel wood supplied by the state enterprises to the urban area. As is shown in the following figure, Albanian families are using in the most of the cases electric stoves for cooking purposes.

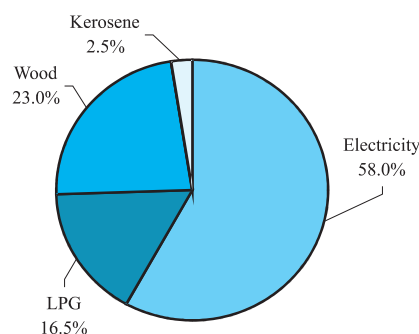

**Figure I.22** Appliances used for cooking in the household sector (in percentage)

## I.1.4.7 Energy technologies in transport sector

Up to the end of 1980s, the transport sector has been relatively unimportant in the Albanian energy scene, accounting for less than 15% of total final energy consumption. With the collapse of the economy in 1991, consumption of gasoline and diesel for road and rail transport remained stagnant.

# I. ENERGY SECTOR

Beginning from 1992 the strong increase in the road vehicle stock has been accompanied by a surge in transport activity and a very visible increase in energy consumption associated by a deterioration of the urban air quality. Transport sector is divided into two sub-sectors: passenger transport and freight transport. At the following table are given the stock of vehicles in each category: cars, buses and mini buses, heavy-duty vehicles, motorcycles and road tractors.

<i>Table I.12: Stock of the vehicles in each category</i>				
	1994	1996	1998	2000
Cars	53298	67278	90766	111345
Buses and minibuses	5471	7612	9227	12567
Trucks (heavy-duty vehicles)	25343	27774	34378	39600
Motorcycles	3345	5541	6542	5600
Road tractors	1110	2838	3035	3700
<b>Total</b>	<b>88567</b>	<b>111043</b>	<b>143948</b>	<b>172812</b>

Albania has around 10000 km of roads. Of these 8000 km including all the major national roads are under the responsibility of the Ministry of Transport while the remaining 2000 km serve mainly to connect mining areas, forests and villages under other jurisdictions. Practically all roads, especially after damages of February-June 1997, are in very poor conditions and in emergence need for repair. If those repairs will take place, they will lead to a reduction in the rate of specific fuel consumption compared to current relatively high level, so significant as to change the overall nature of the problem. Road passenger transport is divided into: cars and motorcycle, diesel cars and busses. In 1995, the activity level for road passenger transport was 2741passenger-km-capita. Shares for devices and energy intensities for road transport are given in the table below based on the statistical records of the Ministry of Transport and the NAE.

Albania is one of the few countries where a policy of increasing railway transport has been applied consistently over the last several decades. The length of railway lines, which was just over 200 km in 1970, was more than tripled during the course of the '80s to reach 720 km in 1990. After 1990 the passenger transport by railway has dramatically dropped, because the state hasn't provided enough funds for the maintenance and trains are very slowly and old fashioned.

Albania's sea transport is provided through four principal ports, (Dures, Vlora, Saranda and Shengjin) of which Dures is the most important. Since the mid '80s a considerable effort has been made to create infrastructures for the use of inland waterways. Domestic transport by sea and by inland waterways accounts for only a small fraction of passenger and freight transport within Albania. Since 1990 sea passenger transport has exploded in the first place since the beginning of the emigration. Albania, in addition to Rinas, has four other airports located in the tourist areas and 6 airfields. Air transport has been stagnant until the political changes opened the country to international traffic. Since 1990 to 1996 the air passenger transport increased rapidly, and it will continue to grow in the future due to the rehabilitation of Rinas airport, which began in 1996 and as a result of plans to commence domestic air services. Shares of total end-use and energy intensity levels for 1994 are stated respectively in the following tables:

**Table I.13:** Shares of total end-use and energy intensity levels for passenger transport (1994)

Year 1994	FUEL	SHARE % of total end-uses	INTENSITY GJ/ passenger-km
Road			
- cars/MCs	GASOLINE	10%	$10.20 * 10^{-3}$
- diesel cars	DIESEL	20%	$2.840 * 10^{-3}$
- buses	DIESEL	70%	$0.544 * 10^{-3}$
Rail	DIESEL	100%	$0.524 * 10^{-3}$
Sea	DIESEL	100%	$21.8 * 10^{-3}$
Air	JET FUEL	100%	$4.360 * 10^{-3}$

## I.1.4.8 Energy consumption industries

The main sub-industrial sectors are listed as following:

- Extraction sub-sector, which includes mining of different minerals like copper, iron, chromium, etc;
- Food, beverage and tobacco sub-sector, which includes food, beverage and tobacco industries;
- Chemical and petrochemical industry, which includes plastic, fertilize, refineries, medicines and other industries;
- Building materials sub-sector, which include cements, limes, bricks, glasses and other non-metallic product industries;
- Metallurgy sub-sector, which includes steel, Ferro-chromium, pure copper, nickel, and aluminum products industries;
- Other industries where are included: textile, leather, shoes, wood processing, paper, pulp, and printing, manufacturing of electric and electronic equipment and other processing industries.

Historically, Albania's energy intensity in industrial sub-sectors has been very high. This means that the macro economic output normally denounced by the GDP, especially from the industry sector has been low compared with the overall energy consumption. The reasons are the same as for the other CEE countries which have been orientated towards energy intensive industries such as mining and metallurgy, and where energy prices have been prevailing low. In 1985, due to the existence of a very energy intensive industry in Albania, the energy use per economic output was slightly higher than the average for the CEE countries. This level again was almost 5 times bigger than the average level of the EU countries. During the following 10 years until 1994 Albania's situation changed radically. The energy intensity was reduced by some 50% but the per capita energy consumption was reduced even more to only 1/3 of the 1985-level.

The very low productivity of the labor evidenced previously makes the energy consumption per employee considerably lower in all sectors and end-users. As an average over all industry, energy consumption per employee is less than 20% that for the state of the art technology. The ratio however varies very significantly within the sector, from as low as 7% for building materials and paper and pulp, to as high as 81% for metallurgy. These results evidence the effect of the high labor intensity of Albanian industry in reducing energy consumption with labor quite clearly competing with energy, but only at a very low level of labor productivity.

# I. ENERGY SECTOR

With the opening of the Albanian economy towards free market economy accompanied by industrial restructuring, technology, process and management changes, it may be expected that Albanian energy intensities in physical output terms will tend to approach the state of the art values. This will be a relatively slow process, however, and it seems unlikely extent of the scenario. The scenario forecasts, which also attempt to incorporate changes in product lined up within each sector, vary widely with the sector end-user.

The strongest changes are assumed to take place in sectors, which are the most distant from current of the art, such as glass and ceramics, metallurgy, engineering and building materials where relative changes in energy intensity are in the order of 50 to 100%. Changes are both positive and negative reflecting the interplay of numerous factors among which the most important are the replacement of old and inefficient technology and production process and the increasing mechanization. Considering manufacturing and mining as a whole, the ratio of Albanian state-of-the-art energy intensities in physical terms decreased by about 18% for electricity and increased by about 22% for heat uses. Audits have shown very low figures of power factors ( $\cos \phi$ )<sup>9</sup> in the range of 0.55-0.7.

## I.2 Criteria for assessment

As indicated in the introduction section of this report, the identification of the priority technologies and actions has gone through a view of the contribution that new technologies in different sectors might make to social, environmental and development goals. There are four factors and respective sub-factors already determined as criteria of assessment (Box I.7).

### Box I.7.

#### Criteria for assessment

1. Contribution to the achievement of most of the MDGs
  - Job & wealth creation for the poor - JW
  - Food security - FS
  - Health improvements - HI
  - Capacity building (human, institutional, physical, environmental) - CB
  - Ensure environmental sustainability - EES
  - Economic and industrial efficiency improvement - EI
  - Gender equality and empower woman - GE
2. Social acceptability and suitability for country conditions SA&S
3. Market potential
  - Capital and operating costs relative to alternatives - COC
  - Commercial availability - CA
  - Reliability and potential scale of utilization - RPS
4. Contribution to Climate Change
  - GHG emissions reduction potential - GR
  - Adaptation potential - AP

As indicated in the introduction section, 1 determines the maximum weight of factors and 100 determines the maximum score of sub-factors.

<sup>9</sup>  $\cos \phi$  is the ratio between the active power and total power in each end user.



## I.3 Selection of key technologies

As indicated in section 1.3, namely overview of the work done under the Albania's FNC, a cost-benefit analysis of technology options/measures is performed for energy and transport sector.

The package of technologies/measures already analyzed for the energy and transport sector under the Albania's FNC have been screened and evaluated on the basis of above assessment criteria: (i) Development benefits; (ii) Social acceptability and suitability for country conditions; (iii) Market potential; (iv) Contribution to climate change.

A ranking process of the scored technologies has followed and a set of top 5 technologies has been selected as key ones for intervention. These top 5 technologies should be in our priorities. However, the SNC will look at other technologies that are estimated of a lower score but easier, cheaper and faster to be implementing, such as #16, #19, #20 and # 22. The evaluation matrix of energy technologies is available in Annex I, Table 1. The final selection table is presented below:

<i>Table I.15: Technology ranking matrix for the energy sector</i>		
No	Proposed technologies	Points
1	Introduction of thermal insulation in households/service (public buildings) which use fuel wood, LPG, electricity and kerosene as energy source to meet the space heating demand;	227.50
2	Introduction of the combined heat and power plants in public buildings and private buildings (Hotels etc) in service/industry sector	225.50
3	Introduction of solar water heaters instead of electric boilers in households/service sector;	217.50
4	Introduction of public passenger transport with buses and trains instead of cars and mini buses;	215.75
5	Improvement of power factor in industrial & service consumers;	209.50
6	Improvements of efficient boilers which use coal/oil coke/residual fuel oil/heavy fuel oil as fuel;	206.25
7	Introduction of mini HPP instead of diesel generators;	200.40
8	Introduction of central heating and district heating in public buildings and private buildings (hotels, etc) in service/industry sector	198.50
9	Introduction of efficient electric motors in service/industry sectors;	181.75
10	Substitution of coal, residual fuel oil and oil coke fired boilers with heavy fuel oil fired boilers;	157.50
11	Introduction of freight transport with heavy trucks and trains instead of small trucks and medium trucks;	151.75
12	Introduction of LPG instead of electricity for space heating and cooking in households and service sectors;	147.00
13	Introduction of HPP instead of heavy fuel oil power plants;	142.25
14	Introduction of wind turbines instead of diesel generators;	139.25
15	Introduction of gas power plants instead of heavy fuel oil power plants;	136.00
16	Introduction of efficient lighting (incandescent lamps instead of fluorescent ones) in households/service/industry;	128.75
17	Introduction of efficient irrigation systems in Agriculture sector;	121.00
18	Introduction of landfill gas plants with 70% recovery;	113.50
19	Introduction of efficient refrigerators in household/service sectors;	113.00
20	Introduction of prepayment meters in household sector;	98.25
21	Introduction of PV electricity instead of diesel generators;	96.00
22	Introduction of thermostat switches in electric boilers (for DHW) in household sector;	71.00



# I. ENERGY SECTOR

The above table shows that the most significant technologies that really need to be addressed and implemented in Albania are:

Key technologies in energy	
1.	Introduction of thermal insulation of households/service (public buildings) which use fuel wood, LPG, electricity and kerosene as energy source to meet the energy demand for space heating;
2.	Introduction of the combined heat and power plants in public buildings and private buildings (Hotels etc) in service/industry sector;
3.	Introduction of solar water heaters instead of electric boilers in households/service sector;
4.	Introduction of public passenger transport with buses and trains instead of cars and mini buses;

## I.4 Identification of existing barriers and policy needs

A number of barriers that can hinder and remain challenges to the technology transfer process in energy sector in Albania are identified. They are identified through a broad consultative process with key stakeholders. These barriers are of different categories such as: economic, organizational, legal, information, awareness, etc. Also policy needs in order to overcome these barriers are identified. In summary they are indicated in the following table:

Table I.16: Barrier assessment and policy needs	
BARRIERS	POLICY NEEDS
<b>ECONOMIC</b>	
Limited financial resources	Support provided by the government in provision of grants, concessions, loans;
Lack of national currency conservation	Creation of an enabling environment for foreign investments;
Low paying capacity of enterprises & population; Lack of the domestic production of power engineering equipment	Improvement of the economic situation in the country; Creation of an enabling environment for the domestic production of power engineering equipment (solar panels);
Low energy price and state subsidies to energy consumption	Development of pricing policies reflecting the actual costs of energy supply;
<b>LEGAL / REGULATORY</b>	
Lack of standards and norms for energy consumption	Develop standards and norms for energy consumption and enhance efficiency of technologies
Lack of a Law on energy saving and energy efficiency; Lack of incentives for the utilization of renewable energy sources	Adopt <sup>10</sup> a law on energy efficiency and energy saving
<b>INFORMATION / AWARENES</b>	
Lack of access to technological information	Establishment of an specialized information system for that purpose
Lack of information among investors on potential technology market; Lack of information and awareness among governmental structures, private companies and public on the benefits of the energy efficiency and energy saving technologies.	Develop awareness raising campaign to keep different stakeholders informed on the potential technology market and the benefits of the energy efficiency and energy saving technologies. Organize TV and radio programs and advertising campaigns.
<b>HUMAN / INSTITUTIONAL RESOURCES</b>	
Lack of skilled professionals in energy conservation and efficiency techniques; Lack of personnel for the introduction and operation of environmentally sound technologies	Organize qualifications and trainings on energy conservation and energy efficiency techniques and good practices.
Lack of human and institutional capacities to implement the Kyoto Protocol Mechanisms such as Clean Development Mechanism	Ratification of Kyoto Protocol by the Government of Albania Capacity development to respond to the implementation of the Kyoto Protocol Mechanisms.

<sup>10</sup>This law has already been drafted by the NAE and will be sent for adoption to the Parliament.

## I.5 Selection of actions

A package of policies and measures required for abatement of GHG emissions have already been proposed under the National Climate Change Action Plan<sup>11</sup> developed under the Albania's FNC. As indicated there, sector measures and policies are addressed. This package of measures is highly taken into consideration during the phase of preparation of the National Energy Strategy and is fully reflected into the Action Plan<sup>11</sup> for implementation of this Strategy.

Actions needed in the framework of the technology needs already identified for the energy sector in Albania are addressed in the form of project needs. Therefore, a package of possible project proposals is designed by experts for each of the key technologies for energy sector. Each project idea consists of the main objectives, expected outcomes, linkages to the development priorities, potential stakeholders, respective barriers, GHG reduction potential, and financial cost. Titles of project ideas proposed for energy sector are as following:

1. *Introduction of thermal insulation in households/service (public buildings), which use fuel wood, LPG, electricity and kerosene as energy source to meet the energy demand for space heating and air conditioning.*
2. *Introduction of DH and CHP systems in industry, service and households sectors to meet the energy demand for heating and electricity in Albania*
3. *Introduction of Solar Water Heating Systems in households/service (public buildings), which use electricity, LPG and fuel wood as energy source to meet the energy demand for space heating and air conditioning.*
4. *Increasing the share of public transport to the passenger transport in Albania*

*Detailed project ideas can be found in Annex II.*

---

<sup>11</sup>According to the Decree # 184, dated September 16, 2003 of the Council of Ministers, the National Action Plan for Implementation of the Energy Strategy is fully obligatory for all relevant and responsible institutions.

## II. LAND USE CHANGE AND FORESTRY SECTOR

### II.1 Overview of options and resources

#### II.1.1 Sector profile

Albania's forests cover 1030.230 ha roughly 36% of the total land area whereas pastures cover 14%. Forests consist of high stem forests [45%] and coppice [54.3%]. The single forest species occupy 72.3 % and the mixed species forests [27.7%]. According to their destinations forests are classified as production forests, which have a share of 86%, and preservation forests [14 %]. In Albania, natural forests have a share of 91.2% and man made ones or plantations cover 8.8% of the total.

At present, Albania's area distribution after land use is as follow:

<i>Table II.1: Area distribution</i>	
Type of land	Share %
Arable land	24
Forest	36
Pasture and grassland	16
Other (water, stone, etc.)	24

Source: MoAF - statistics 2002

About 83% of the forest area is semi-natural forests originating from natural regeneration conserving the main species composition. There are also about 8.2 % or 84,841 ha of virgin/primeval forests mainly localized on the northern part of Albania. The plantation or man-made forest area has been increasing until early '90s and afterwards stopped because of investments reducing composing actually around 8.8 % of the area.


The total pasture area at the moment is estimated at 415900 ha with a pastoral capacity of 1521 million heads. About 60 % of pastures have been transferred in use to the Communes; about 5.5% of total area is compensated to ex – owners, whilst other areas, mainly summer pastures are under management of the General Directorate of Forests and Pastures (DGFP). Further needs for food are provided by forest areas through harvesting the green mass from certain types of trees.

There are no changes in the use of the agricultural area at the national level during the year 2002. The agricultural land fund has remained unchanged for the last ten years (699 thousand ha or 24% of the total area, 36 % forests, 15% pastures and 24% others). According to the data of the agricultural statistics, the area destined for agriculture has not changed in comparison to the year 1990, but in reality there is a considerable area not used for agriculture any longer; which has shifted the other areas. So, only 50% of this area is cropland and this land represents a real and stable fund for agricultural development. The other part, that is situated higher than 300 m from the sea level is very fragmented, with stones, with very few potential capacities for irrigation, is salted, eroded and with little feeding possibilities. More than 30% of the land is situated on the hills side: these are mainly pastures converted in new lands during 1970-1985. Regarding the location of the lands for agricultural use, these lands are mainly

## II. LAND USE CHANGE AND FORESTRY SECTOR

extended on the sloppy areas and located in very high zones. More than 47% of the land is located higher than 600 m from the sea level and with some small exceptions like the Korca- Erseka plateau valley; other areas are very poor and infertile.

The dynamics of the area destined for agricultural land, pastures, and forests in the period 1990/2000 are given in Figure II.1 as follows:

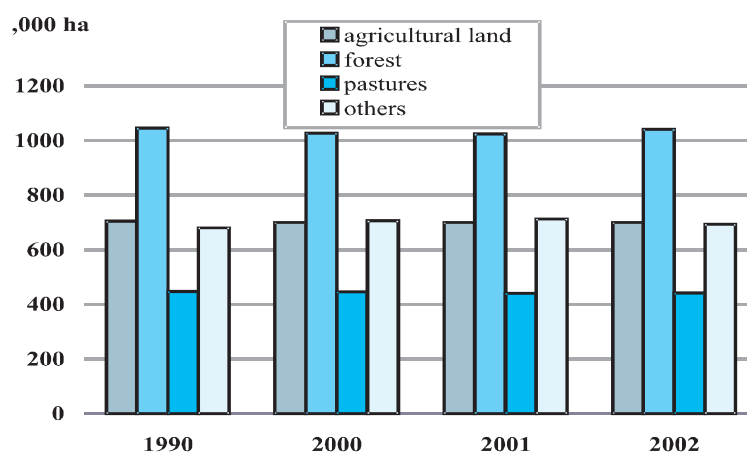

Source: MoAF- statistics 2002

**Figure II.1:** The structure of the land (1990 - 2002)

During the period 1990-2000, land categories have not changed much and the agricultural land stands for 24% of the total area, forests for 37%, pastures and meadows for 15% and other lands for 24%. The data show that an area of 10,000 ha has changed destination: it has merged from the category 'others' to 'forests'. Although it's a small area, this change speaks up significantly for the development of the communal forests.

Concerning the area of the agricultural land per each inhabitant, our country is the last ranked in the region (about 2200 m<sup>2</sup> per inhabitant). On the other hand, based on the fact that only 450000 ha of land can really be cultivated, which also corresponds with the de-facto cultivated area during the last decade, it can be concluded that one inhabitant is entitled to only 1400 m<sup>2</sup>, which renders Albania the most poor country in agricultural land. Moreover, even the fertile lands (especially in the west side of Albania) cannot be totally cultivated be

cause of the high immigration in these zones, the lack of supporting governmental policies (e.g. credits) etc.

The general situation of the Albania's forests and land use is given as following:

- Until 1990, the arable land has been increasing and after diminishing. Actually there are around 120000 ha abandoned agricultural lands, which are refused even by farmers as inappropriate land to cultivate crops;
- Despite of reforestations, the share of forests has been decreasing in the past

## II. LAND USE CHANGE AND FORESTRY SECTOR

50 years because of deforestation made in order to enlarge the share of arable land. A portion of considerable loss in forest area came as result of inappropriate government decisions as part of an autocratic decision to strive for food self-sufficiency, which resulted in the clearance of about 260000 ha to create “agricultural and”. It was also impacted due to the change of the definition on “forest”. Afterwards, too much forest area is included in pastures;

- There has been in the past and continues to occur a gradual but pervasive degradation of the quality of the resource base (loss in standing volume and overall productivity) over large areas of formerly productive forestlands. The current estimates show a total of standing volume of approximately 82.3 million m<sup>3</sup>, a reduction of about 10% since 1950. Annual growth despite relatively favorable growing conditions stands at about 1.34 m<sup>3</sup>/ha/year, one of the lowest in all Europe;
- The pasture area has been decreasing until 1990 and after, increasing. The other area has been decreasing until 1990 by drainage of the inland water area and increasing by construction of the artificial lakes used for irrigation or electricity generation;
- The drying of a considerable inland water area has increased organic soils with considerable CO<sub>2</sub> reserves;
- The mountainous terrain, different geological straits and tips of soil, overlapping of central European to Mediterranean climate are the main factors to have too much biological diversity in the ecosystems. Actually there are about 3250 plant species, from which about 330 species are shrubs and trees - the endangered species number is 130.

During the former regime the forest estate was organized into 26 districts – based Forest Enterprises, each of which was responsible for preparing management and utilization plans for the forest area under jurisdiction. Staffing and capacities at that time were actually quite effective in preparing these plans. Towards the latter years of the former regime the central planning authorities in need to provide raw material for the installed wood processing industrial capacities and to meet the fuel wood needs of an expanding population, often over –rode the exploitation limits and destined those amounts beyond the annual cut allowance to be harvested. This has led to a gradual degradation of the forest resource base particularly in the more accessible areas where there was also a fair amount of harvest by rural people to meet their own needs. In addition to forest enterprises, many districts had also forest harvesting and wood processing enterprises, which used to deal with all activities related to forest infrastructure, roads, harvesting and processing.

After Albania’s shift to the market economy the forestry administration began the decentralization. The decentralization of forests and pastures management aims at accomplishing the transfer of state forests and pastures, their management competencies inclusive, in use to the local government units. The decen-

## II. LAND USE CHANGE AND FORESTRY SECTOR

tralization process of forests and pastures management also aims at curbing further degradation and ensures overall development of forests and pastures through the participation of rural communities in their protection, improvement and sustainable management, consequently in environmental protection, thus increase the benefits of communities and villages from the management of these natural resources. At present, the transfer process of forests and pastures to the Communes has been completed and respective management plans have been worked out for 127 communes with a total area of 322400 ha forests and 58240 ha of pastures.

The primary responsibility for the management and development of the forestry and pasture rests with DGFP that is directly a subordinate of the Ministry of Agriculture and Food. A commission established under the authority of the DGFP is in charge of licensing the timber auctions participation to natural persons and companies.

### II.1.2 Policy and legal framework

#### II.1.2.1 Policy framework

A National Strategy and Action Plan for forestry and pastures have been designed in 2001. The main objective of this strategy aims at the improving management structures, as well as forest and pastures employment control. The following six policy goals of this strategy are:

- Maintenance of the integrity of forests and pastures;
- Promotion of the sustainable management of natural resources;
- Promotion of the transition to a market-driven economy;
- Transfer the management responsibility on selected state forests and pastures to the local government;
- Improvement of the state management of production forests and the summer pasture resource base;
- Development of recreation and tourism opportunities in forest and protected areas.

This strategy implies a series of well-informed choices among the various options to reach each goal.

Through the support of the World Bank Forestry Project, a process of transfer the Government managed forests to the Communes is launched. In collaboration with Food and Agriculture Organization (FAO) re-profile of the DGFP was carried out.

In 1999 the former National Environmental Agency that on 2001 merged into the MoE, has developed a Biodiversity Strategy and an Action Plan. This strategy was developed with GEF funding through the World Bank in cooperation with the Institute of Biological Research and the Museum of Natural Sciences. The aim of this strategy is to help the protection and re-establishment of the natural balance of landscape and biodiversity, and protection of all forms of



## II. LAND USE CHANGE AND FORESTRY SECTOR

life including the natural and aesthetic values inside or outside the protected areas through promoting the sustainable use of those resources. The Biodiversity Strategy addresses the forest category especially that under the protected areas.

From 1993-1996 a Coastal Zone Management Plan has been developed as a cooperation of Albania's Government, the UNEP, the World Bank and the European Union. Many natural coastal habitats have been destroyed by excessive drainage and land reclamation for agriculture, currently abandoned for practical or political reasons. The biodiversity component of the Coastal Zone Management Plan deals with the conservation and protection of sites of ecological and aesthetic values including forests.

### II.1.2.2 Legal framework

The transformation of the forestry sector from the centrally planned and state implemented model has necessitated major changes in the legal and regulatory framework for the sector. The most important of these changes is naturally the law on forests. A revised law "On Forestry and the Forestry Service Police", No. 7223, is adopted on 13.10.1992. The amendments provide for less emphasis on production from the forest and instead establish special importance on market orientation, attention to environmental issues and on sustainable management of forests.

Another important aspect of the legal framework concerning forests and pastures is the Regulation No. 308 "On the transfer of Forests and Pastures into the use and management of Communes", passed in January 1996 and currently under consideration for amendments. This regulation provides for the criteria for such transfers, discusses the nature of the relationship between the State and the Communes and their rights and responsibilities, and applies the terms of use of these areas once transferred to Communes. Communes consider this regulation as the primary mechanism for implementing the innovative decision to handover forestlands with regard to the use, control and management.

An inter-ministerial Task Force has been established and it has been very successful in reducing illegal cutting and trafficking of wood. A Decree of the Council of Ministers, No. 648, dated 13.12.2002 is adopted in order to better control forests use. It aims at temporarily prohibition of woodcutting in forests excluding the woods for heating.

A number of other areas of the legal framework are also pertinent to the understanding of the operational boundaries for the development of the forestry and pasture sector. They include local government, environmental protection, land legislation, tourism etc.

The legal framework relevant to the forestry and pastures is summarized in the Box II.1 as following:

## II. LAND USE CHANGE AND FORESTRY SECTOR

### Box II.1.

- Law “On forestry and the forestry police service”, No. 7223, dated 13.10.1992.
- Law “On environmental protection”, No. 8934, dated 05.09.2002.
- Law “On the protected areas”, No. 8906, dated 06.06.2002.
- Law “On pastures and meadows”, No. 7917, dated 13.04.1995.
- Law “On fisheries and fish farming”, No. 7908, dated 05.04.1994.
- Law “On hunting and wildlife protection”, No. 7875, dated 23.11.1994.
- Law “On urban planning” No. 8405, dated 17.09.1998.
- Law “On the development of the tourism priority areas”, No. 7665, dated 21.01.1993.
- Law “On the compensation in value or in kind of agricultural land, pastures, meadows, forestland to the ex – owners”, No. 7699, dated 21.04.1993.
- Law “On the protection of fruit trees and other orchard plants”, No. 7929, dated 30.06.1994
- Governmental Decree “On the approval of tourism priority areas” No.88, dated 01.03.1993
- Governmental Decree “On the approval of coastal zone management plan”, No. 364, dated 18.07.2002.
- Governmental Decree “On categories of protected areas”, No.577, dated 06.02.1993.
- Governmental Decree “On the control of forests”, No.648, dated 13.12.2002.

### II.1.3 Overview of the work done under the Albania’s First National Communication

Albania’s forest area is composed mainly of the broad leaf species, which are more capable to serve as sinks of CO<sub>2</sub> emissions. The main source on biomass production and absorption of the CO<sub>2</sub> emissions for 1994 are commercial forests and deciduous broad leaf species.

Estimates from Albania’s FNC, show that the LUCF category has a share of 21.60% against the net total of GHG emissions [7061.45 Gg], calculated for 1994 as the base year.

Estimates also show that in 1994 forests do not serve as a sink, but as a source of GHG emissions due to the bad management. Based on these estimates, the total carbon uptake has shown a value of 615.36 carbons Kt. The total biomass consumption, annual carbon content and annual CO<sub>2</sub> emissions are found to be respectively 2054.76 dm Kt, 1027.38 Kt of carbon and –1510.73 Gg of CO<sub>2</sub>. The last negative value shows that there is more release of GHG emissions than absorption by forests (see Figure II.2). This happens due to the wood cutting process in Albania, which is higher (over three times) than the annual increment of forests. Despite of the high level of uncertainty concerning the activity data for this category, the biggest contribution comes from non-registered cuttings (illegal cuttings).

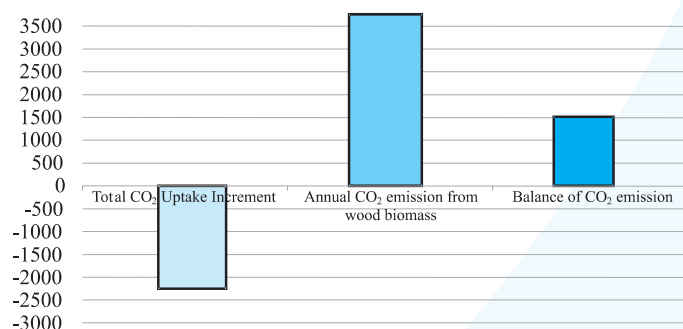


Figure II.2: CO<sub>2</sub> emissions and sinks from forestry, [Gg], 1994

## II. LAND USE CHANGE AND FORESTRY SECTOR

According to IPCC guidelines on GHG inventory preparation, the emissions from the fuel wood burned to meet energy needs has to be reported under the LUCF category. Since in Albania the tree cutting rates are higher than yield intake they are reported under the Energy category as well increasing its share significantly. Furthermore, the CO<sub>2</sub> emissions from biomass burned for energy purposes are identified as a key source<sup>12</sup>. Estimates show that the share of this category represents 21.4%. This means that it needs to be taken into consideration during the policy design process for the LUCF sector because policies and measures to reduce emissions from this category have a significant impact to the overall GHG reduction. On the other hand, this category is identified as the most significant one in terms of contribution to the overall GHG inventory uncertainty level. This is explained due to the missing data for illegal cuttings of trees in rural areas, which are not registered and reported elsewhere.

The baseline scenario<sup>13</sup> developed for the LUCF category under the Albania's FNC, for the baseline 1994 – 2020, shows that total CO<sub>2</sub> uptake is expected to change from 236.24 Gg in 1994 to 1526 Gg in the year 2020. In 2020, the total emissions of released CO<sub>2</sub> from burning of fuel-wood are expected to reach 2940 Gg from 1871 Gg in 1994.

Experts have proposed a set of 13 qualitative and quantitative measures. Only three of thirteen proposed measures have been selected as key measures aiming at reducing GHG emissions in the LUCF category, starting from 2002 up to the year 2020. The selection is based on the criteria<sup>14</sup> set for the assessment of mitigation technologies in the frame of the Albania's FNC. Top three measures selected under the FNC of Albania for the LUCF category are the following:

*1. Integrate climate change concerns into the forest development strategy and other related strategies*

Preparation of the forestry development strategy and action plan based at the sustainable development principle where implications by climate change are to be considered;

*2. Increasing the forest area by reforestation.*

The predicted reforestation area of about 15000 ha with an average rate of reforestation about 775 ha/year would lead to a reduction of the rate of decreased forest area from 1024.616 ha in 2001 to 993323 ha in 2020;

*3. Implementation of the forest improvement operations.*

Implementation of the coppice forest conversion using the same or fast-growing species to high stem forest in a forest area of about 100000 ha with an average annual rate of 5000 ha/year.

<sup>12</sup>Key sources represent the main sub categories that have significant contribution (up to 95%) to the overall GHG inventory.

<sup>13</sup>Baseline scenario of GHG emissions from the LUCF category is estimated for years 2010 and 2020. The IPCC methodology is used for estimates.

<sup>14</sup>A qualitative assessment has been made for the LUCF category under the Albania's FNC. Criteria used under this phase were: (i) mitigation potential; (ii) economic impact; (iii) environmental (non-climate) impact; (iv) potential ease of implementation; (v) long term sustainability; (vi) consistency to national development goals; (vii) data availability for evaluation

## II. LAND USE CHANGE AND FORESTRY SECTOR

According to the abatement scenario, assuming the implementation of the above three measures the projections of GHG emissions from the LUCF category would be as following:

- The total CO<sub>2</sub> emissions would change from [-2732.72 Gg] in 2001 to an uptake of [2886.84 Gg] in 2020;
- The total emissions of CH<sub>4</sub> would change from [0.15 Gg] in 2001 to [0.29 Gg] in 2020;
- No emissions of N<sub>2</sub>O from LUCF. From [0.00 Gg.] in 2001 will remain the same [0.00 Gg] in 2020;
- The total emissions of NO<sub>x</sub> would change from [0.04 Gg] in 2001 to [0.07 Gg] in 2020.

### II.1.4 Take the stock of technologies currently in use

As previously indicated, a National Strategy and Management Plan for the Development of Forests and Land exist and is object of revision every 10-15 years. There is also some experience and capacities have been already built and developed. There exist institutions that have proposed, prepared and implemented studies and research projects in different areas of forestry. Last years, in the framework of the forestry development project in Albania supported by the World Bank, the implementation of around twelve research projects and a monitoring program of the forest health situation have occurred.

Projects to regenerate the forests area by planting of more adapted species and the fast-growing species aiming at developing mix forests, directly by seed and by sapling plantings are well-known practices in our country.

Thousands hectares of forests mainly oak forests have been rehabilitated by re-stumping operations. Also, in order to increase their productivity, forests have been converted from coppice to high stem forests by co-senescence way of the same native species or by planting the more fast-growing species.

There are experimented some fast-growing forest species and some of them have resulted successful such as the poplar hybrids, Monterey pine, Douglas fir, seaside pine, while some others are in their way of experimentation. For some of them, even the planting possibilities on the considerable area have been studied.

A lot of man-made forests have been created by plantings of Mediterranean pines (*Aleppo pine-Pinus halepensis* Mill, *Seaside pine-Pinus pinaster* and *Stone pine-Pinus pinea* L.) on the limestone geological formations and on sandy terns along the coastal area, and black pine (*Pinus nigra* Arn.) on the serpentine geological formations. The same could be said with poplars along the rivers on sandy terns. There are also planted some other broadleaf species like walnut (*Juglans regia* L.), chestnut (*Castanea sativa* L.), Sweet ball (*Laurus nobilis* L.) etc. There are areas with fast growing forest tree species like Black-locust (*Robinia pseudoacacia* L.), while some small area is planted with Monterey pine (*Pinus radiata* D.Don.), etc.

## II. LAND USE CHANGE AND FORESTRY SECTOR

Despite the good practices, in order to have the fodder for livestock husbandry during the cold season, farmers have always pruned oak tree and beech tree during the autumn season reducing too much the annual increment of forest in a forest area of about 275860 ha.

The current legal and regulatory framework prohibits interventions to the forests areas (no operations are eligible) without proposed and approved application projects. Also the law on forest protection by fire has enabled the establishment of the national service for forest protection by fire. However, there is an urgent need to improve such a service and strengthen their capacity building since the fires in the forests and pastures are foresighted to be increased and to be more intensive. On the other hand, there is little awareness related to risks of forest and pasture fires which brings the desertification of the territories.

There is also still common in the rural area the practices of usage of wood for energy purposes (to meet the demand for space heating, cooking and hot water supply in the households). Therefore there is an urgent need to reduce wood consumption for energy by substitution of firewood with other non-fossil fuels.

### II.2 Identify criteria for assessment

The same assessment criteria as for the energy sector are used for the selection of the key technologies: (i) Development benefits; (ii) Social acceptability and suitability for country conditions; (iii) Market potential and (iv) Contribution to climate change.

As indicated in the introduction section and energy and transport section, 1 determines the maximum weight of factors and 100 determines the maximum score of sub-factors. See Annex I, Table 2.

### II.3 Selection of key technologies

A ranking process of the scored technologies has followed and a set of top 4 technologies has been selected. Four technologies are found as key ones for intervention for the LUCF category. The evaluation matrix of LUCF technologies is available in Annex I, Table 2. The final selection table is presented below:

## II. LAND USE CHANGE AND FORESTRY SECTOR

No	Proposed technologies	Points
1	Identification of firewood needs of farmers and their forest resources to meet them	76.60
2	Reforestation of an area of 100,000 ha on refused agriculture lands, using more capable species to absorb the CO <sub>2</sub> and fast-growing species	72.50
3	Integrate climate change concerns into the National Strategy for forest development and to other related strategies	71.80
4	Monitoring of fire situation to assess the more threatened forest areas from the climate change point of view and the desertification scale due to fires	70.00
5	Increase of the protected forest area	67.30
6	Conversion of the coppice forests to high stem forests by planting the fast-growing species or more capable species to sink CO <sub>2</sub> in an area of 20,000 hectares	67.30
7	Regeneration of a forest area of about 15,000 ha with more capable species to absorb CO <sub>2</sub> by planting the fast-growing species and more adapted species to the expected climate change and the sea level rise, harvesting therefore a mix forest	65.30
8	Study of the potential of the forest biomass usage for energy purposes in rural areas	63.70
9	Monitoring of the forest situation and forest health situation in relation with climate change and sea level rise	63.50
10	Rehabilitation of burned forest areas	59.30
11	Development of local forest sustainable development actions plans based on the national ones	58.90
12	Study on the firewood reduction ways out	57.10
13	Develop a new law on forest protection from fire associated with the reorganization of the fire protected service	48.40

From the above table it is evident that the most significant technologies that really need to be addressed and implemented in the LUCF category in Albania are:

### Key technologies in LUCF

1. Identification of firewood supply and demand for energy purposes in rural areas;
2. Reforestation of an area of 100,000 ha on refused agriculture lands, using more capable species to absorb the CO<sub>2</sub> and fast-growing species;
3. Integrate climate change concerns into the National Strategy for forest development and to other related strategies;
4. Monitoring of fire situation to assess the more threatened forest areas from the climate change point of view and the desertification scale due to fires;

### II.4 Identification of existing barriers and policy needs

Several barriers hinder the pathways and mechanisms of technology transfer in the LUCF category. They are also identified through a broad consultative process with experts and key stakeholders. These barriers are of different categories such as economic, organizational, legal, information, technical, awareness, etc. Specifically they are: (i) limited financial resources, (ii) inadequate information on the cost and potential benefits, (iii) limited technical capacity, (iv) absence of policies and institutions to process, evaluate and clear mitigation projects, (v) uncertainty regarding quantity of carbon abated and its permanence, (vi) low economic return for some technologies and (vii) relatively long period to release carbon benefits. In addition, the forestry sector faces land rules regulation and other macroeconomic policies that usually favor the conversion to other land uses such as agriculture and cattle ranching. Insecure land tenure regimes and tenure rights and subsidies favoring agriculture or livestock are among the most important barriers for ensuring sustainable management of forests, which in turn ensures the sustainability of the CO<sub>2</sub> emissions abatement.



## II. LAND USE CHANGE AND FORESTRY SECTOR

### Box II.2.

*Forestry GHG mitigation activities generally face a wide range of technical issues that challenge their credibility. The twin objectives of using forestry to mitigate climate change and managing forests sustainability do pose a challenge in monitoring and verifying benefits from carbon offset projects in the sector. The emergence of improved monitoring methods could force reappraisal of the relative credibility of activities to manage carbon sinks. Monitoring and verification are key elements in gaining the credibility needed to capture the potential benefits of forestry sector response options, particularly in reducing deforestation. While this is a generic barrier to deforestation reduction initiatives, it also represents an opportunity for transfer the technologies needed to monitor land use change and carbon stocks and flows. Among the mitigation options, there is a high degree of certainty about reforestation/ afforestation, less on forest management and even less on forest conservation.*

*IPCC Methodological and Technological Issues in Technology Transfer, 2000.*

In non-Annex I countries mitigation measures under the LUCF category, like in all categories are going to be undertaken mainly in the basis of projects which will be funded by investors, bilateral and multilateral assistance agencies, NGOs and foundations largely based in Annex I countries.

Governments are going to play a critical role in promoting these projects and accompanying the process of the technology transfer between Annex I and Non Annex I countries. Governments control multilateral agencies as well as bilateral development assistance. Some of the measures to be undertaken under such an assistance would be (i) support funding to the projects and programs through grants and low-interest loans for sustainable forest management practices, industrial plantations, protected areas and forest restoration programs; (ii) establishment of the forest monitoring and verification programs; (iii) provide funding for institutional and human capacity building and improving research and development capacities.

The CDM offers a potential for facilitating technology transfer in the LUCF category.

### II.5 Define and select actions

A set of policies and measures for the LUCF category along with other categories have already been proposed under the National Climate Change Action Plan, developed under the Albania's FNC. Actions needed in the framework of the TNA, already identified for the LUCF category in Albania are addressed in the form of project ideas. A package of possible project ideas is designed by experts, which clearly address each of the top 4 technologies selected for the LUCF sector. The list of project ideas proposed for the LUCF category is the following:

1. *Identification of demand and supply for firewood in rural areas;*
2. *Integrate climate change concerns and sustainable development into the Forest Management Strategies and plans;*
3. *Reforestation of an area of 100000 ha on refused agriculture lands using more capable species to absorb the CO<sub>2</sub> and fast-growing species;*

## II. LAND USE CHANGE AND FORESTRY SECTOR

4. *Monitoring of the fire situation to assess the more threatened forest areas from the climate change point of view and the desertification scale due to fires;*

Based on the selected technologies, project ideas have been developed and presented in Annex II.

# III. AGRICULTURE

## III.1 Overview of options and resources

### III.1.1 Sector profile

Albania is predominantly an agricultural country. Albanian economy is and will continue to be dominated by agricultural activity for many years to come. Agriculture is a vital and one of the most important sectors of the economy, which provides a significant part of GDP - 54.9 %. In addition, the majority of population lives in rural areas and is self-employed in agriculture sector, reaching about 52.7 % of the labor force. It accounts for 12.8 % of total exports. Crop production accounts for 48.1 % and livestock production 51.9 % of the total agricultural production.

The rapid privatization and redistribution of land in 1992 and 1993 and the scrapping of all producer price controls accelerated agricultural growth. Land was distributed proportionately to every family according to size and was graded on the basis of irrigation, shape, renting and quality. The land market remains underdeveloped with some shape renting taking place, but few sales. Restrictions on the sale of land were removed since July 1995. Currently, there are no price controls or subsidies for agricultural products. Import and export quotas and restrictions have been removed. Owing to small farm size, farmers have only a small marketable surplus, lack access to credit and, thus cannot purchase the inputs required to improve productivity.

Further increases are at present limited by small fragmented family farms of an average 1.4 ha; the low productivity of the farm technology and management systems; inadequate access to credit as well as input and output markets; and a predominantly subsistence approach to farming caused by risk aversion. Owing to population pressure and a lack of employment opportunities in other sectors, farm holdings are small and fragmented (on average four parcels per farm) and productivity is low. Farmers continue subsistence farming on diversified and extensive farms faced with the collapse of basic state services and the poor maintenance of basic infrastructure. Efforts to minimize risks are based on continued insecurity regarding land rights, lack of access to agricultural services such as irrigation and inadequate resources to invest in farm production.

Agro-food industries have been privatized with the assistance of various aid programs, which provide credit, agribusiness management advice and extension services. About 52.7 % of the population is engaged in agriculture and related industries, which provide the main source of rural household incomes.

A significant reallocation between crops and livestock took place by switching marginal cropland into pastures. Vegetable production is still increasing, while arable land devoted to grain has decreased. Industrial crop production remains still at a low level owing to the lack of agro processing markets for their products. Grape (for wine production) is steadily increasing. Pastureland has drastically increased whereas food cereals have lost importance since many years.

The livestock is the part of agriculture sector related to the GHG emissions.

Even though small livestock production systems dominate the share of market and processed oriented – production is growing rapidly. The demand for livestock feeding stuff is increasing in this ever-growing sub-sector. Since the real possibilities to expand natural pastures are limited, the ever-growing demand for livestock feeding stuff should be met through improving production of forage crops like alfalfa, maize, etc as well as by using industrial by-products.

Dairy production, including butter and cheese, went up as a result of newly established dairy industries. Consumption of animal products (meat and milk) and fruits and vegetables also rose. Consumption of traditional staple food (cereals and bread) remained at the same level. For the year 2002, the Albanian consumer consumed on average: milk around 198 l/person, meat around 30,5 kg/person and eggs 12 l/person.

### **III.1.2 Policy and legal framework**

#### **III.1.2.1 Policy framework**

From 1992 to 1996, the agriculture sector has been developed in compliance with an “Agriculture Strategy” designed by the Government of Albania with the contribution of the World Bank (1992-1996) and for the period 1998-2001 under the “Green Strategy”. The implementation of both strategies has enabled Albania’s agriculture sector, as one of the basic components of the integrated rural development, to pass through a long and proper direction way since the beginning of transition period towards market economy.

Although the situation in Albania was not appropriate to face the drastic and very quick changes compared to the way that other CEE countries faced them many of substantial reforms have been applied, which include among other, privatization, land distribution, and liberalization of market and prices. Important investments accomplished so far on the rehabilitation of infrastructure have had an impact on development. The situation changed quickly due to rigid implementation of reforms, which brought about macroeconomic changes. The rural sector, not feasible and dominated by big state-owned enterprises and agricultural cooperatives, was transformed into fragmented rural sector characterized by thousands of small family farms that even though small and fragmented registered an increase in production.

The fast market globalization for agro-food production, as well as the process of regional and EU integration requires the adoption of Albanian agriculture with new conditions. The use of new technologies, which increase both production and income while respecting environment become imperative. It is the time for natural agriculture applied in remote areas and conventional one applied at the lowlands to be substituted gradually by sustainable agriculture as the alternative of the future for a safe food and a clean environment. For this reason a new “Strategy for the Development of the Agriculture and Food Sector” has been developed in 2003. It was designed and adopted as part of the NSSD. It aims at the consolidation of achievements of the agriculture sector and laying out the basis for medium and long-term development. It aims at a greater sustainability

### III. AGRICULTURE

of the reforms applied in this sector, further consolidation of the public investments for a sustainable sector and regional development. It also aims at the better utilization of the economic, social and financial resources to ensure the increase of the public and private investments in the fields of marketing, agro-processing, food control and sustainable management of the natural resources. Food security remains a constant priority for the population, in particular in the remote areas.

The objectives of the Strategy for the Development of the Agriculture and Food Sector are in line with those of the Action Plan in the frame of Stabilization and Association Agreement, the MDGs, objectives of the Decentralization Strategy through the transfer of management responsibilities of natural resources as land, forest, water etc., to the local government, and objectives of the other sector strategies like the Rural Development Strategy.

Regarding the livestock production, the strategy aims at consolidating the achievements reached so far by building new production chains, in order to implement livestock racial program; increase production of the combined livestock feeding stuff, and carry out qualitative production and market checks for the last ones.

#### III.1.2.2 Legal framework

The legal framework<sup>15</sup> regarding the agriculture sector directly or indirectly related to emissions released into atmosphere is relatively young, since 11 years from now. The new Strategy for the Development of the Agriculture and Food Sector opens the door to the improvement of the current legislation and development of the new laws aiming to regulate the agricultural activities, which in turn will reduce the impact on the environment like the Law “On Land Protection”; the Law “On pure breeders and racial flocks in livestock; regulatory framework on livestock feedstuff inspection, for the certification of animals with racial values on the market and provision of minimum standards for the pet breeding”. The current relevant legal framework is summarized as following:

##### Box III.1.

###### ■ **Legislation on land use:**

- Law “On land”, No. 7501, dated 19.07.1991
- Law “On some amendments of the Law no. 7501, dated 19.07.1991 “On Land”, No. 7715, dated 02.06.1993
- Law “On some additions to the Law “On land” No. 7763, dated 25.10.1993
- Law “On creation and operation of land protection and administration structures”, No 8752 dated 26.03.2001

###### ■ **Legislation on cultivated plants:**

- Law “On the service of plant’s protection”, No. 7662, dated 19.01.1993
- Law “On the protection of the medicinal herbs fond”, No. 7722, dated 15.06.1993

###### ■ **Legislation on the administration of waters for agriculture purposes:**

- Law “On water resources” No. 8093, dated 21.03.1996 and the by-laws on its implementation
- Law “On the regulatory framework of water supply sector and removal/treatment of waste waters”, No. 8102, dated 28.03.1996
- Law “On some changes and amendments of law no.8093, dated 21.03.1996 “On water resources ” No. 8605, dated 20.04.2000

<sup>15</sup>There are some relevant laws already mentioned in the Forests section like Law “On the meadows and pastures”, No. 7917, dated 13.04.1995, which are not repeated in this section.

## III.1.3 Overview of the work done under the Albania's First National Communication

Agriculture category is the second category that follows the energy one regarding its share against the net total emissions of greenhouse gases in Albania. Estimates from Albania's FNC show that the Agriculture category contributes with [1915.06 Gg] or has a share of 27.12% against the net total of greenhouse gas emissions [7061.45 Gg] calculated for 1994 as the base year.

CH<sub>4</sub> is found to be the GHG that has the most significant contribution to the Agriculture category. Main source categories of CH<sub>4</sub> emissions are enteric fermentation with a share of 95% and manure management with 5.12%. Cattle category is the main contributor for CH<sub>4</sub> emissions from enteric fermentations with 72.26% followed by sheep category with 16.27%.

N<sub>2</sub>O emissions are mainly released due to microbial processes in the soil, mostly by application of nitric fertilizers, which contribute with 84.81%.

Key sources analysis shows that the category of CH<sub>4</sub> from enteric fermentation is in the top of the key sources with a share of 22.49 %. Activity data for this category are much fragmented. After 90's, the state livestock farms and agriculture cooperatives were privatized and therefore the livestock breeding shifted from intensive to extensive.

The baseline scenario developed for the Agriculture category under the Albania's FNC for the baseline year 1994 to 2020 shows that by the year 2020 the CH<sub>4</sub> emissions are expected to reach the value of 114.16 Gg, compared to 79.91 Gg estimated for the year 1994.

The baseline scenario<sup>16</sup> developed for the agriculture category predicts higher values of CH<sub>4</sub> emissions from manure management systems, nearly 10 times higher [40 Gg] in 2020 compared to 1994 [4.08 Gg]. Also the scenario predicts higher values (around 10 times) for N<sub>2</sub>O emissions released from manure management systems.

The abatement scenario for agriculture category consist on a qualitative analysis of a set of six measures and selection<sup>17</sup> of two key measures as the most appropriate ones for GHG mitigation from the Agriculture category. The six measures proposed and analysed are listed as following:

### 1. *Improvement of diet quality and nutrient balance*

The improvement of diet quality and nutrient balance as part of the improved livestock management would considerably affect the amount of enteric methane. Low quality feedstuff is expected to produce a greater amount of methane per unit of production.

<sup>16</sup>Baseline scenario of GHG emissions from the Agriculture category is estimated for years 2010 and 2020. The IPCC methodology is used for the estimates.

<sup>17</sup>A qualitative assessment has been made for the Agriculture category under the Albania's FNC. Criteria used under this phase were: (i) mitigation potential; (ii) economic impact; (iii) environmental (non-climate) impact; (iv) potential ease of implementation; (v) long term sustainability; (vi) consistency with national development goals; (vii) data availability for evaluation



### 2. *Increase of the feed digestibility*

This measure is expected to reduce the amount of released methane especially in dairy cattle. The proposed measure stands in compliance with the government's main objective in the livestock sector, namely increase production supply by improving the breed, enhancing feed and controlling disease.

### 3. *Improvement of the animal genetics and reproduction.*

Research has also identified that some animals emit less methane than other animals of the same species. It may therefore be possible to selectively breed animals that have this characteristic.

### 4. *Reduction of the overgrazing pressure on marginal lands*

The proposed measure takes into account the mobility (nomadic life) of the small ruminants of Albania. Therefore increasing of the nutritional values of the pastures would increase the productivity of the grazing animals and reduce the methane emissions.

### 5. *Improvement of livestock manure management*

The improved management of the livestock manures through the implementation of the appropriate technologies is considered as an efficient measure for the decrease of the methane emissions.

### 6. *Increase of N fertilizer usage efficiency*

This measure aims at matching the N supply with crop demand and conserve plant residues N on the production site, thus contributing to the overall reduction of NO emissions from the agriculture sector.

The selection process made under the Albania's FNC concluded with the following two top measures: (i) *Increase of the feed digestibility* and (ii) *Reduction of the overgrazing pressure on marginal lands*.

#### **III.1.4 Take the stock of technologies currently in use**

An inventory of the technologies that help in reducing the GHG emissions released from agriculture activities has been made under the TNA. The following technologies are assessed to be less GHG emissions ones:

- *Treatment of maize straw with urea-ammonia for feeding cattle*

This low cost technology consisted in improving the feed digestibility through the increase of its crude protein content. The technology was largely implemented in the livestock state farms during the 80's and its purpose was somehow to preserve the lactating cattle productivity throughout the dry season. For this purpose chopped maize straw was treated with urea 20-40 g some times higher dissolved in 500 ml water for each kg straw. The technology contributed in the reduction of the methane release as a consequence of the improved digestibility. Currently few livestock breeders in the country are using the technology.

- *Use of molasses blocks as feed supplement in cattle*

In the southeastern part of Albania (Maliq Commune of Korca region) molasses blocks have been used as feed supplement in cattle. This technology was related to the existence of a sugar beet processing plant in this area. Molasses was a major by-product of this plant and is a good, palatable and cheap source of energy for cattle. Since liquid molasses was difficult to be used in farming practices, the liquid form was put in moulds and solidified in blocks before getting used.

- *Composting of manure*

Small scale composting has been a traditional way of manure management by the Albanian farmers.

The decomposed residue has been subsequently used as a soil conditioner. Research and studies indicate that compost usage can reduce fertilizer requirements by at least 20%, thereby significantly reducing net GHG emissions.

## Box III.2.

Composting is the aerobic<sup>18</sup> decomposition of organic matter by certain microorganisms. These microbes consume oxygen and use nutrients including carbon, nitrogen, phosphorus, and potassium as they feed on the organic matter. The resulting composted manure is humus-like organic material, fine-textured, low-moisture, and with a non-nasty earthy odor. If high enough temperatures have been reached during the composting process, pathogens and weed seeds have been killed.

## III.2 Identify criteria for assessment

As for previous sectors, the same assessment criteria are used for the selection of the key technologies: (i) Development benefits; (ii) Social acceptability and suitability for country conditions; (iii) Market potential and (iv) Contribution to climate change. Also the weight and scores remain the same: 1 determines the maximum weight of factors and 100 determines the maximum score of sub-factors. See Annex I.1, Table 3.

## III.3 Selection of key technologies

For the Agriculture sector, a set of the following four technologies has been object of the analysis. They are more specific compared to the technologies/measures analyzed under Albania's FNC. The GHG abatement technologies analyzed and ranked according to the set criteria are the following:

1. *Implementation of low cost bio-digesters for the manure processing in the farming system.*

This low cost technology promotes the efficient use of manure in the farming system of Albania. The use of low cost plastic bio-digesters, apart from ensuring a better management of manure brings additional advantages to the economy and the environment (production of gas for cooking and effluent to fertilize ponds for fish, aquatic plants and crops). The most appropriate and cost efficient model of bio-digester appears to be the Taiwan model, which makes

<sup>18</sup>Aerobic - requires oxygen

use of cheap polyethylene tubular film. The estimated cost for each device is 28 USD and can be covered by the farmers themselves.

#### *2. Implementation of anaerobic digester lagoon with methane gas recovery*

Anaerobic lagoons are perhaps the most trouble free, low maintenance systems available for the treatment of animal wastes. This is particularly true for the coastal area of Albania where winter temperatures are mild permitting anaerobic digestion year around. The effluent from the digester is a valuable source of nitrogen for plants. Placing a cover over the lagoon for collecting biogas virtually eliminates odor from the lagoon. The collected biogas, which is up to 70% methane, can be a valuable source of energy.

#### *3. Use of urea molasses nutrient blocks as a supplement in the diet of ruminants.*

This technology approach appears interesting for smallholder sheep and goat farmers. Albania is basically a small ruminants breeding country and introducing this technology would raise interest among breeders. Feeding trials have indicated a positive response in terms of weight gains in animals. No signs of toxicity due to urea have been observed so far.

#### *4. The development of farming systems and practices that encourage efficient nitrogen uptake by plants and minimize loss of nitrogen through de-nitrification, leaching, burning and other processes*

The nitrogen fixation process offers a unique option for an efficient use of nitrogen fertilizers or organic amendments. In that respect Rhizobium bacteria, either as established soil populations or added as legume inoculants make significant contributions to the total nitrogen inputs. Therefore the use of technologies that would ensure the survival of Rhizobium bacteria from the point of seed or soil application to the time of seed germination would ensure the functioning of the nitrogen fixation process. Some of these technologies that hold potentials of applications are as follows:

- Implementation of the user - friendly inoculant's formulations and methods for application as seed dressing or direct to soil;
- Inoculant's products that are compatible will dry sowing that allow grower greater flexibility in sowing time;
- Diagnostic tools for the rapid assessment of population densities of *Rhizobium bacteria* in soil.

A ranking process of the scored technologies has followed and a set of top two technologies has been selected as key ones for intervention for the Agriculture category. The evaluation matrix of measures is available in Annex I, Table 3. The final selection table is presented below:

No	Proposed technologies	Points
1	Low cost bio-digesters for the manure processing	750
2	Use of urea molasses blocks as a supplement in the diet of ruminants	700
3	Anaerobic digester lagoon with methane gas recovery	500
4	Implementation of user-friendly inoculants formulations for promoting the nitrogen fixation process	400

The above table shows that the most significant technologies that really to be addressed and implemented in the Agriculture category in Albania are:

#### Key technologies in agriculture

1. Low cost bio-digesters for the manure processing;
2. Use of urea molasses blocks as a supplement in the diet of ruminants.

#### III.4 Identification of existing barriers and policy needs

There are many barriers identified for the transfer of the recognized key technologies in agriculture sector.

The main barrier identified that needs to be taken into account is the *lack of capital investment*. The above technologies, especially the second one proposed will not be so easily transferred mainly due to the relatively high cost. Albania as a recipient country needs capital investment to access and adopt new technologies identified as appropriate to its conditions. This barrier may be primarily overcome by grants or loans provided by international donors. However, the financial aid may need to be accompanied by the removal of institutional barriers that hinder the process of technology transfer. The government can facilitate the process through incentives by regulating and improving institutions.

Also *lack of information and education* remain as significant barriers of technology transfer for the agriculture sector. In developing countries there exist a lack of access to information and awareness of what technologies fit with their conditions and sources of information where they can find the appropriate ones. There is a need of information exchange on international technologies for overcoming this barrier. The public role in education is crucial and well known and needs a lot of support. This could be mainly done by practical demonstrations through pilot projects.

Another barrier identified is the *lack of human resources* to deal with technology transfer in this sector. This barrier can be overcome through human capacity building and development, which also requires funding.

The main role in the technology transfer process in agriculture sector belongs to the *government*. The government can promote effective modalities for the access and transfer of technologies. Some of the most significant actions that the government can undertake are related to the resources mobilization for projects in the Agriculture sector that have a positive impact on climate mitigation, capacity building and development, research and development (R&D) focused on technological innovation and transfer, provision of incentives, dissemination of information on new technologies, etc.. Other players are *international organi-*

*zations*, which mainly facilitate the process through funding for institutional and capacity development, R&D, provide grants through projects, develop information systems for information sharing, etc.

*Private sector* is also important in the technology transfer process. It can provide technical assistance to appropriate users on new technologies and promote cooperation on R&D activities directed at technological innovation and technology transfer for climate change.

### III.5 Define and select actions

Actions needed in the framework of the TNA, already identified for the Agriculture category in Albania are addressed in the form of project ideas. A package of two project ideas designed by experts clearly addresses each technology selected for the Agriculture category. The list of projects proposed for the Agriculture category is as follows:

1. *Use of low cost bio-digesters for the manure processing in Albania's farming system.*
2. *Industrial production of nutrient blocks for livestock feeding*

Based on the selected technologies, project ideas have been developed and presented in Annex II.

## IV.1 Overview of options and resources

### IV.1.1 Sector profile

#### IV.1.1.1 Introduction

After '90s, when the country started the way towards the market economy, the problem of solid waste become a concern because of the generation of large quantities of urban waste as a consequence of the rapid increase of urban population due to the irregular migration and commercial exchanges with other countries as well.

The reduction of waste generation at source and the disposal of waste in a more suitable way as concerns the environment are lastly taken into consideration in the new legal framework on waste. Along with the increase of waste generation, Albania faces also their inappropriate management. The municipal waste are not managed in a safe manner leading to serious concerns about their potential environmental risks such as contamination of soil, surface and ground waters with possible impacts to drinking water, inland and coastal waters; adverse aesthetic impact on the natural environment; risks of self-sliding of the amount of waste deposited over time; existence of contaminated areas from the treatment and depositing of waste for many years which increases the cost of urban development and also presents serious health and environmental risks.

Albania is not in the position to secure adequate funds for the introduction and implementation of modern technologies and disposal systems.

The composition of urban solid waste is one of the main factors influencing both: the amount and the extent of  $\text{CH}_4$  production within solid waste disposal sites. Municipal Solid Waste (MSW) typically contains quantities of degradable organic matter. The content of organic substances in the total amount of waste generated in the country is high, which is a specific feature of the developing countries.

The dumping sites are practically the only disposal system for urban solid waste currently adopted in Albania. The technologies used for the final disposal are those, which do not include methane recovery systems.

The main solid wastes produced in Albania are urban domestic waste, industrial waste and hospital waste. The country situation is characterized by the increasing of the production of this kind of waste.

#### IV.1.1.2 Urban solid wastes

The increase of the generation of urban solid waste is the direct consequence of the products such as plastics, paper and cardboard, glass and cans. The introduction of these kinds of materials does not only worsen situation of the disposal of urban solid waste from a quantitative point of view, but also from a qualitative point of view.




## IV.WASTE

Another essential fact is the present generation of waste per person and especially the tendency for the future. The essential information is that the present production of urban solid waste per person, which can be valued at about 0.7-0.8 kg/day, tends to develop or increase towards the typical value of 1 kg/day of western European countries due to population growth and increase of the construction activities.

The reasonable estimated waste quantities for the near future will be 0.8 - 0.9 kg/day/person, because it is foreseen a period of population growth and increase in the construction activities, while it will reach the value of 1.1 – 1.2 kg/day/person towards 2010.

At national scale, during 1998, approximately 520000 ton of urban solid wastes have been generated. The major five cities: Tirana, Durres, Vlora, Shkodra and Elbasan, contribute with about 44 % of the total production of urban waste, while Tirana, the capital, contributes with about 116000 ton, or 22 % of the total amount generated in the country.

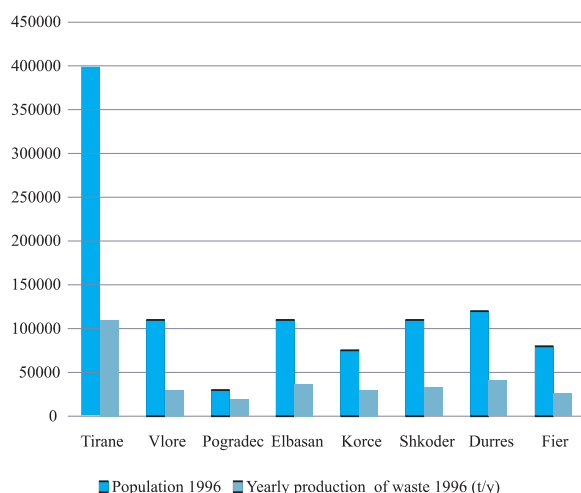


**Figure IV.1** Waste productions per year in main cities of Albania

The following table shows daily production for some prefectures in 1999-2000.

<b>Table IV.1: Daily production of MSW in some prefectures</b>			
Prefecture	City	Quantity (t/day)	Quantity (m <sup>3</sup> /day)
Berat	Berat	65	
	Kucove	40	
	Skrapar	15	
Diber	Diber	57.5	
	Mat	47.9	
	Bulqize	40.5	
Durres	All Prefecture	200	
Elbasan	Elbasan	100	
Fier	Fier	80	
	Lushnje	80	
	Divjake	7	
Gjirokaster	Kelcyre	6.8	
	Permet	13	
	Tepelene		30
	Gjirokaster		80
Korce	Korce	70	

	Pogradec		23.5
Shkoder	All Prefecture	55	
Tirane	Kavaje	40;	
	Tirane	268.3	
Vlore	Sarande	14; 6	
	Delvine	7	
	Vlore		90

The composition of waste is one of the main factors influencing both the amount and the extent of CH<sub>4</sub> production and release from solid waste disposal sites. Municipal solid waste typically contains significant quantities of degradable organic matter.

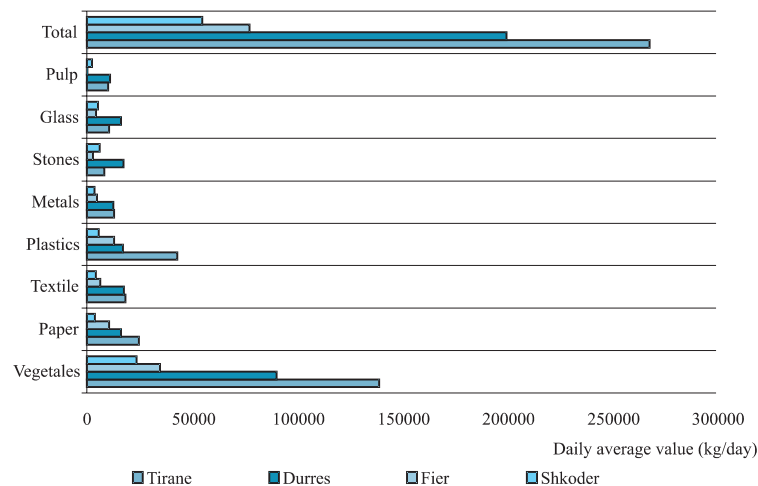

**Figure IV.2:** Waste composition in 4 monitored prefectures

These facts bring to consider the serious effects such as the potential pollution of the water-bearing strata, air, the emission of gas, smells, etc. The dumping sites are practically the only disposal system for urban solid waste in Albania.

## IV.1.1.3 Industrial wastes

In the past and up to now environmental problems deriving from industrial production have not been taken into consideration. The types of industries existing in the country are those, which traditionally determine the serious conditions in terms of polluting emissions. Several chemical plants actually don't operate, or operate at low capacity, but they are sources of pollution for the environment.

The mining field has a great weight on the environment. Solid and liquid substances pollute rivers and lakes with chemical products. The quantity of industrial solid waste discharged by the enrichment plants is estimated around 1.2 million tons per year.

The industrial waste, which contains toxic substances and are produced by the treatment carried out by mining, metallurgical and other kinds of industries are simply stored up in disposal sites without any preliminary treatments. In consideration of the fact that suitable waterproof measures are not carried out at the dumping sites, the water undergoes an uncontrolled contamination. The present moment that the Albanian industry is in limits the production of industrial waste.

### IV.1.1.4 Hospital wastes

At present there are 51 hospitals in Albania. The quantity of hospital waste produced daily has been estimated around 2 kg per patient. From the data analysis it was estimated that around 7.3 tons of hospital wastes are produced every day in seven cities. This amounts to 2600 tons per year.

The waste and medications coming from infectious hospitals, or departments usually are treated in the hospital unit through incineration. The rest of the waste produced by the hospital is transported to the municipal dumping sites and are being disposed of the same as the urban solid waste that has been generated in the city.

### IV.1.2 Policy and legal framework

#### IV.1.2.1 Policy framework

A National Waste Management Plan exists since 1998. The Plan has been developed under the EU PHARE Environmental Program for Albania. The main objectives of this Plan were: (i) Define standards and regulations for classification and final disposal of urban and industrial wastes in Albania; (ii) Reduction of soil and water contamination caused by the uncontrolled disposal of waste; (iii) Recover a series of degraded dumpsites; (iv) Mitigate risk to human health from inappropriate waste collection and disposal methods; (v) Identify and recommend appropriate waste treatment methods and financing plans capable of providing necessary investments.

The National Waste Management Plan consists of the following components:

- Waste management laws, regulations and standards;
- Urban solid waste;
- Industrial waste;
- Hospital waste;
- Improvement of contaminated sites;
- Waste disposal systems and dumpsite design;
- Selection of an appropriate disposal site;
- Waste management proposal for major Albanian municipalities;
- Analysis and testing systems.

According to the Plan, the whole collection, transport and disposal system for urban solid waste must be completely reorganized. This should also keep into due consideration the actual financial situation or resources. There are two type of interventions proposed in the Plan: the short term interventions and the medium - long term ones. In the short term the priority would be given to simple technology interventions, because these interventions involve lower costs. It is recommended to construct a series of sanitary landfills and also to carry out reclamations for the present plants. At the same time it will be important to carry out pilot interventions employing complex technologies, such as for example, small composting plants.

In the second stage, it will be important to carry out all those interventions which cannot be accomplished at the moment, because of the lack of financial resources, such as the completion of recycling and incineration plants, and systems such as the one for the differentiated collection of waste.

The subdivision of the national territory in collection basins has the substantial aim of having lower costs and also of improving the management of the services themselves as much as possible. 12 different collection basins have been foreseen for urban solid waste. For each basin the carrying out of a sanitary landfill is foreseen in the short term. This system has been chosen both because it involves lower costs in comparison to other systems, and also because this kind of intervention can be carried out on a national scale, thus reducing the costs even more.

One of the main components of the National Waste Management Plan is the Plan Proposals. The most important points of these proposals are as follows:

- Prevention of waste production;
- Recovery and recycling of the waste produced;
- Safe disposal and reclamation of contaminated sites;
- Re-organization of the public services;
- Construction of waste collection basins in the country;
- Institutional framework building and policy development;
- Waste management costs and financial instruments and resources.

There is a proposal to build environmentally sound landfills in six mayor cities of Albania, which has been approved by the Government in 1999, but the funding has not been available. Some sorting of the glass bottles, paper, cardboard, scrap steel, aluminum cans and small quantities of scrap cooper takes place. There is no information available about the people and companies that sort and reuse such waste.

Since objectives of such a Plan are not fulfilled due to lack of financial and human resources, there is a strong need for the Plan to be revised.

The main institutions responsible for the waste management in Albania are the Ministry of Environment, the Ministry of Territory and Tourism, and Municipalities.

### **IV.1.2.2 Legal framework**

No specific law that regulates the release of GHG emissions from the solid waste management processes exists in Albania. The main Law “*On Environmental Protection*” No. 8934, dated 05.09.2002 guides the current legal framework for waste management. Waste issue is a central topic under this law. Starting from Article 21, there are a couple of Articles that address the waste issue. Article 20 of this law, namely Waste Management addresses the aim of this action.

Another important law that follows the Law on Environmental Protection is the Law “*On the Environmental Administration of Solid Wastes*”, No. 9010, dated 13.02.2003. The purpose of this law is to ensure the protection of environment and human health from the pollution and damage resulting from solid waste through their environmental treatment at every stage: creation, collection, separation, protection, transportation, recycling, processing and elimination leading to waste reduction and the reduction of their hazardous and dangerous impact.

There are also other Laws, Decisions of the Council of Ministers and public Regulations approved by the Local Government aiming to set rules on the land-fills, on the transportation of wastes and on their disposal that fill in the current legal framework. A clear picture on that is given in the following box:

**Box IV.1:**

- Law “*On the Environmental Protection*” No. 8934, dated 05.09.2002;
- Law “*On the Environmental Administration of Solid Wastes*” No. 9010, dated 13.02.2003;
- Law “*On the Public Waste Disposal*” No.8094, dated 21.03.1996;
- Law “*On Organization and Functioning of the Local Government*”, dated 8652, dated 31.07.2000
- Decision of the Council of Ministers on Hazardous Wastes and residues No.26, dated 31.01.1994;
- Regulation “*On the Waste Exportation and Transition*” signed by the Minister of Environment on October 2003;

As of June 1999, Albania became a contracting Party to the Basel Convention on the Control of Trans-boundary Movement of Hazardous Waste and their Disposal. The main objective of the Basel Convention is the Protection of health and environment from the negative impacts of the production, administration and trans-boundary movement of the waste in general and hazardous waste in particular.

### IV.1.3 Overview of the work done under the Albania’s First National Communication

The national GHG inventory for the base year 1994 pointed out that the share of waste sector to the overall GHG emissions from waste sector is 4.81 % or 339.65 Gg CO<sub>2</sub> equivalents. Estimates show that CH<sub>4</sub> and N<sub>2</sub>O emissions released from waste category are respectively 13.94 Gg of and 0.152 Gg. The main source of CH<sub>4</sub> emissions is agriculture sector which has a share of 77.74 %, while the waste category contributes with a share of 13.60 % to the total CH<sub>4</sub> emissions. The net annual CH<sub>4</sub> emissions are released by unmanaged landfills or dumpsites.

**Box IV.2.**

*Methane is generated from solid waste and wastewater through anaerobic decomposition. Together, solid waste and wastewater disposal and treatment represent about 20% of human induced methane emissions. Methane emissions can be reduced in many ways, including reducing waste generation (source reduction), diverting waste away from disposal sites (i.e., through composting, recycling or incineration), recovering methane generated from waste, or ensuring that waste does not decompose in an aerobic environment. In general, every technique or technology that reduces methane generation or converts methane into carbon dioxide through combustion will reduce GHG.*

**IPCC Methodological and Technological Issues in Technology Transfer, 2000.**

Albania doesn’t have a wastewater treatment plant still. Since the system is aerobic, it means that CH<sub>4</sub> emissions released are equal to zero.

According to the baseline scenario in 2020, the annual methane emissions from waste sector (landfills) are expected to rise to 66917 Gg or around five times more compared with the base year, 1994.

Also the indirect nitrous oxide emissions from Waste Sector (human sewage) are foreseen to reach an amount of 0.267 Gg for the year 2020 from only 0.15 Gg in 1994. Their contribution in terms of CO<sub>2</sub> equivalent will be around 6% of the total GHG expected from the waste category in 2020.

The abatement scenario developed for the waste category under the Albania's FNC consists on the following abatement options:

1. Reducing the generated municipal solid waste;
2. Recycling and composting in order to reduce the organic matter;
3. Reducing the quantity of organic material in land filling waste;
4. Construction of sanitary landfills with recovery gas system;
5. Construction of MSW incinerator with energy utilization;
6. Construction of wastewater treatment (WWT) plants.

Discussing over the criteria for screening options decided under the Albania's FNC, the following are selected as more optimal:

1. Building new sanitized dumps and utilize the produced dump's gas;
2. Building a new MSW incinerator with energy use.

### IV.1.4 Take the stock of technologies currently in use

The dumping sites are practically the only disposal system for *urban solid waste* adopted in Albania. These disposal plants don't have any drainage system as regards the percolation effect or efficacious compacting systems. The technologies used for the final disposal of urban solid waste do not include differentiation of wastes and methane recovery systems. Urban wastes are simply discharged. Existing landfills (actually simple dumpsites) do not have a system to protect groundwater against the leaching of hazardous substances. Few landfill sites for municipal disposal exist and they not meet the international landfill construction standards and health norms. They are major sources of surface and groundwater contamination, especially industrial waste landfills.

As per the *industrial waste*, the past industrial activities left Albania with a heavy inheritance in terms of industrial waste, which was not suitably disposed of but simply discharged on the territory. Because of the current situation in which Albania's industry is, the industrial waste amount is going through the limits of production. However, due to the lack of devices to limit the impact on environment as well as appropriate and suitable technologies that are still obsolete, the industrial waste produced such as toxic gases, dust, waste waters are released without any kind of treatment.

As regards *hospital waste*, the waste and medications coming from the infections department and surgical department undergo incineration, in the Hospital



University Centre based in Tirana, by means of a plant which is located inside the sanitary structure itself, while the rest of the waste produced by the hospital is transported with special vehicles to the municipality dumping site. These wastes share the same density as the normal urban solid waste which has been produced in the city.

### IV.2 Identify criteria for assessment

Selection criteria remain the same as for other sectors under assessment: (i) Development benefits; (ii) Social acceptability and suitability for country conditions; (iii) Market potential and (iv) Contribution to climate change. 1 determines the maximum weight of factors and 100 determine the maximum score of sub-factors.

### IV.3 Selection of key technologies

Scoring of the technologies was the next step of the assessment followed by the ranking process. A set of top 2 technologies is found. Two top technologies have been selected as key ones for intervention for the Waste category. The evaluation matrix of technologies is available in Annex I, Table 4. The final selection table is shown below:

No	Proposed technologies	Points
1	Construction of sanitary landfills with recovery gas system	169.5
2	Construction of MSW incinerator with energy utilization	131
3	Construction of WWT plants	128
4	Recycling and composting in order to reduce the organic matter.	70.00
5	Reduce the quantity of organic material in waste landfill.	67.30
6	Reducing the MSW generated	67.30

The above table shows the most significant technologies that really need to be addressed and implemented in the waste category in Albania are:

#### Key technologies in waste category

1. Construction of sanitary landfills with recovery gas system
2. Construction of MSW incinerator with energy utilization

This assessment brought the same technologies selected under the Albania's FNC.

*Sanitary landfill* is the system, which has the lower costs, and it is the only system, which can be suggested in the short-term and on the entire national territory. The cost of the plant per ton of solid urban waste does not decrease too much with the increase of the material and it does not require a minimum quantity of daily material. If the quantity is low, it is possible to construct a smaller plant or otherwise to extend its life span.

On the other hand, the sanitary landfills presents the problem of the limited period of its life, and especially the problem of the strong environmental impact during its working stage, which however, continues to show even after the end of its activity.

At the moment the landfill does not appear too expensive, therefore the solution of the landfill is the most obvious and above all the easiest to be carried out and managed by local enterprises. The actual composition of municipal solid waste, generally poor with a low heat power, does not suggest using other technologies (e.g. incineration).

As regards the technology of incineration, the investment cost of an incineration plant is much higher than the one of a sanitary landfill. Also, this kind of technology plant has high maintenance costs and needs technical preparation.

The present financial situation and the low profitability of the investments, which derive from the small dimensions of the plants makes it difficult to construct incineration plants in the short and medium term.

In the long term it might be possible to state that only the transport of the waste of the capital Tirana, which amounts 200-250 tons per day, would be able to reach the limit of the economic profitability for an incineration plant.

From a technical point of view, in the present situation of the country, the short and medium term dumpsites or landfills is the only type of plant that represents an instrument at an accessible cost.

### **IV.4 Identification of existing barriers and policy needs.**

The main barriers identified for the waste category include the following:

*Limited availability of funding:* Collection and treatment of urban solid waste and water waste in general is highly expensive. The case of waste incineration is too expensive compared to the construction of sanitary landfills (see section IV.3). In addition, the cost of maintaining and upgrading waste management systems is relatively high. Therefore funding is a significant barrier for transfer of such technologies. At national level, the funding needs go beyond the government capabilities. Innovative financing schemes are necessary to remove such a barrier.

*Limited institutional support:* This barrier is mainly linked to the scarce coordination between the Ministries and institutions in charge of waste management issues. A good management of waste requires good cooperation between national entities responsible for strategies, policies, waste collection, disposal, treatment, revenues collection etc. A clear-cut division of the responsibilities of various institutions on this issue is needed as well.

*Lack of a revised National Waste Management Plan* that along other issues must address the issue of GHG reduction and climate change implications. Policy, institutional framework and legal are crucial to the attraction of foreign investments in the waste sector.

*Lack of awareness:* There is no awareness on the benefits of a good management of waste from the GHG reduction point of view.

*Lack of capacity building:* This includes lack of technical training in both, state and private sector regarding the managerial aspects of wastes and also, lack of information exchange on the modern waste management systems, which are changing rapidly.

Technology transfer in the waste category occurs predominantly along the government pathways with participation of both government levels, municipal and national. Experiences from other countries show that the key role of the government to the technology transfer in waste management will dominate in the future as well. The government role to design the right policy and legal framework supports and encourages the participation of the private sector, supports facilitates and encourages capacity building and in some cases provides incentives.

Lessons learned from other countries' experiences have shown that waste sector can contribute to GHGs mitigation in ways that are economically viable and meet any social priorities. The technology transfer process in waste sector is underway even in Albania because of the continuing and growing need to provide and improve waste management services for the people.

### **IV.5 Define and select actions**

Actions needed in the framework of the TNA, already identified for the waste category in Albania are addressed in the form of project ideas. A package of two project ideas is designed for the waste category in the following projects:

1. *Construction of sanitary landfills for urban solid waste management;*
2. *Construction of municipal solid waste incinerator with energy recovery for Tirana city.*

Project ideas can be found in Annex II.

## V.1 Overview of options and resources

### V.1.1 Sector profile

The analysis of the economic development during the last decade shows a decline of the contribution of the industry sector to the national development. In other words, the contribution of the general industrial production in absolute values of GDP is much lower than used to be before 90's.

After the political and social transformations, the property changes and industrial enterprise management, there is a tendency towards a new stabilized situation due to the establishment of the market economy. During 90's Albania's industry sector has accounted for a steady 12% of GDP.

#### **Box V.1.**

*The industrial sector is extremely diverse and involves a wide range of activities including the extraction of natural resources, conversion into raw materials, and manufacture of the finished products. IPCC defines the industrial sector as industry including the minerals processing industries. The sub-sectors that accounts for roughly 45% of all industrial energy consumption are iron and steel chemicals, petroleum refining, pulp and paper, and cement.*

*These industries are generally concerned with the transformation of the raw material inputs (e.g. iron ore, crude oil, wood) into usable minerals and products for an economy. Due to the wide variety in activities, energy demand and GHG emissions vary greatly. Hence, the aggregate energy use and emissions depend on the structure (or specific set of activities) of industry, and the energy and carbon intensity of each of these activities. The structure of industry may depend on the phase of economy, as well as many other factors like resource and technology availability as well as historical factors.*

*Methodological and technological issues in technology transfer. IPCC. 2000.*

The main industry sub-sectors developed in Albania are metallurgy, chemical, building materials, mining, food/beverage/tobacco, textile/leather/shoes, wood/paper/printing, mechanical and others.

The statistics of the last 10-15 years show a considerable decline of the heavy industry productions (metal minerals over 20 times, coal 50 times, oil and natural gas respectively 3 and 50 times, non-ferrous metallurgy over 100 times, chemicals over 70 times); cement and building materials over 3 times, mechanical industry over 50 times; light industry over 10 times; food industry over 10 times, etc. But meanwhile, it should be underlined that many industrial and energy products such as steel and ferrochromium, electricity, bricks, tiles and lime production, meat and milk by-products, refreshment drinks, clothing and leather production, despite many difficulties have occupied a large part of the market, playing an important role in the economy with a contribution of approximately 15% (or 360 Million USD) in the real GDP. During the last 10 years, the stabilizing developments and increasing tendencies in the processing industry are mainly based on the existing technology, with few positive developments. From energy consumption point of view, the industry continues to have very high intensity<sup>19</sup>. This means that the macro economic output normally denounced by the GDP (especially from industry sector), has been low compared with the overall energy consumption. The reasons are the same as for the other Central and Eastern European Countries (CEEC), which have been orientated towards energy intensive industries such as mining and metallurgy, and where energy prices have been prevailing low. Nevertheless, the GHG emission and respective abatement technologies from the energy consumption in industry sector are considered under the energy and transport section (section I) and would not be analyzed in this section.

<sup>19</sup>For each production unit in nature it consumes 0.1 toe/ton and for each produced monetary unit it consumes: 0.8 toe/thousand USD (which means that in order to produce a value of 1000 USD from industrial products the energy cost is 200 USD).

## V. INDUSTRIAL PROCESSES

All of Albania's industrial branches suffered from obsolete equipment, inadequate infrastructure, and low levels of worker skill and motivation. The equipment inherited at the start of the decade had mostly been supplied first by the former Soviet Union and then by China, little of which proved internationally competitive when Albania opened to world markets.

Referring to the Albania's FNC, the following industrial sub-sectors are identified in Albania as responsible for the emission of direct and indirect GHG, therefore, they will be object of the analysis and consideration under this section: (i) Cement production; (ii) Chromium production; (iii) Iron and Steel production; (iv) Copper production; (v) Nitric acid production.

### V.1.1.1 Cement production

Albania is a country with a geological structure, which provides raw materials for this purpose. A few factories are built for cement production in Tirana, Shkodra, Fushe- Kruje, Elbasan and Vlora, which have been working on their full capacity up to 1990.

Altogether a production of nearly 900000 tons Portland cement of the trademarks 400 to 600 has been statistically registered. About 200000 tons are exported, meanwhile for special works are imported large quantities of white cement, hydraulic cement, etc. Technologically more advanced objects are built up in the 70's in Fushe Kruje and Elbasan, but still with deficiencies regarding the elimination of the dust and CO<sub>2</sub>. After the 90's the production of cement had some oscillations because of the delay of plant privatization process.

Nowadays, only the cement factories of Fushe Kruja and Vlora are working. Clinker material is imported in the first one, which is only grounded and packed. The dynamics of the cement production from 1994 to 2001 is as follows:

<i>Table V.1: The annual production of cement and clinker in 1,000 tons</i>								
Factories	1994	1995	1996	1997	1998	1999	2000	2001
<b>FUSHE KRUJE</b>								
Cement	100	100	100	60	60	-	-	-
Clinker	80	80	80	40	40	200	200	200
<b>ELBASAN</b>								
Cement	95	95	95	70	70	150	150	150
Clinker	80	80	80	70	70	200	200	200

### V.1.1.2 Lime production

After the year 1994 the production of lime had an annual growth, reaching out the point of 120000 tons per year.

Too many limestone furnaces have been built up in the area of Shkodra, Kruja, Tirana, Elbasan, Ura-Vajgurore, etc. Being so spearheaded and of a small capacity, their technology has been generally backward, except of those in Metallurgical Complex of Elbasan and that of Soda-PVC plant in Vlora. Building up furnaces of opened type has caused higher emissions of GHGs. On the other hand, coal of poor quality has been used (in the past) and after the '90s with the

closing down of coal mines, these furnaces operated with combustible fuel of a very low quality like the dust coal, residues of naphtha and finally vehicle tires. There is a strong need for filtering and other equipment to control air emissions released from lime furnaces.

### V.1.1.3 Chromium production

Albania is one of the richest countries in chrome mineral sources. Quantities of 1 million tons of minerals per year have been exported.

During the 70's besides utilization of these minerals, the metallurgy plant of Ferro-chromium production was built up first in Burrel and after that in Elbasan.

In 1994 the Burrel metallurgy plant started the reconstruction of one of its melting furnaces, converting it from the closed type to the opened one, intending the elaboration of the poor minerals, which in the same time decreases the possibility of the explosion and doesn't have rigorous requests for the granular content of the first stuff. But the use of open furnaces causes less control of gas emissions from the melting zone. After 2000, an Italian company, namely DARFO gained the control of the mining and the industry of chromium production.

<i>Table V.2: Industrial production of Ferro-chromium in 1,000 tons</i>									
	1994	1995	1996	1997	1998	1999	2000	2001	2002
Carbonic Ferro-chromium	33.7	42.9	31.2	31.4	30.2	28.1	36	4	50

### V.1.1.4 Iron and steel

In Albania, iron and steel is represented by the production of cast iron and steel. The production of cast iron has begun in mechanical factories for their needs, followed by steel production at the Metallurgy Plant of Elbasan in 1976. On the ongoing of the process there have been some oscillations up to 1994 when the steel production started again using as raw materials mainly scraps, both gathered in the country and imported ones. After 2000, the Turkish company namely KURUM leased the melting furnaces of steel production. In the future, the company plans to import scraps from the region countries of the region.

<i>Table V.3: Steel productions in 1,000 tons</i>									
	1994	1995	1996	1997	1998	1999	2000	2001	2002
Cast iron	-	-	-	-	-	-	-	-	-
Steel	-	-	-	22.23	22.16	23.8	64.8	71.9	80.2

It's worth highlighting that the emissions of direct GHGs are much higher in classical converters than those emitted from electrical furnaces, while the indirect GHGs are quite eliminated in the second ones.



### V.1.1.5 Copper production

The production of copper in Albania is known since ancient times from the elaboration of copper minerals. The industrial production has started in 1943 in Rubik of Mirdita Region (a rich area with copper mineral). In 1960 the melting plant in Gjegjan of Kukes was constructed and after that the one using the electrolyze process in Lac.

Metallurgical plants use classical methods. From the environmental point of view these methods bring high emissions of gases like CO<sub>2</sub> and SO<sub>2</sub> and less CO and NO<sub>x</sub>.

After the 90's the copper production has fallen down continually and after the year 2000, the copper metallurgy doesn't operate any more.

**Table V.4:** *The annual production of industrial copper in Rubik in 1000 t*

	1992	1993	1994	1995	1996	1997	1998	1999
Copper blister	2.27	2.31	1.52	2.9	1.42	-	1.63	128

### V.1.1.6 Nitric acid production

The production of nitric acid is especially distinguished as a source of indirect GHGs. As of 1964, in Albania there have been produced two types of nitric acid: diluted 50-60% and concentrated 96-98%. Actually, the production of nitric fertilizers stopped since 1994, mainly due to the lack of raw materials and methane gas.

## V.1.2 Policy and legal framework

### V.1.2.1 Policy framework

Until the beginning of 2004, no national strategy for the development of the industry sector existed. In April 2004 a National Strategy for the Development of the Non-Food Industry Sector in Albania is adopted by the Council of Ministers according to the Decision No. 269, dated 23.04.2004.

During 2000-2001, the National Institutes of Metallurgy, Chemistry, Light Industry, and Wood & Mechanical Industry respectively agreed to develop a couple of strategic papers for the development of each industry sector under their responsibility. This first attempt aimed at analysis of the sectors including investments from the private sector. An analysis of the positive and negative factors that impacted their development was conducted as well. The aim of these documents was the privatization and transformation of these industries and creation of a favorable environment for the development of the private sector in these sub-sectors.

During the transition period many grants and funds from foreign donors have been used to facilitate the re-profiling and privatization of many non-food industry enterprises. The first group that passed to the privatization was a few small

and medium enterprises (SMEs) of the wood, handicrafts, etc. Their privatization consisted in the establishment of joint ventures with foreign partners. As regards the big enterprises, they first went through the physical re-profiling by the establishment of some smaller units that would help the better unitization in order to facilitate their privatization in a latter stage. Most of these big enterprises were under the responsibility of the local government. After the collapse of the non-food industry during the 90's the reactivation has started thanks to the privatization of the majority of enterprises, which in turn brought a significant flow of foreign investments. During 1998-2003 around 82% of the public ownership enterprises were privatized. In such circumstances the design of a national strategy for the development of the industry sector became a necessity.

The newly adopted strategy is an integral part of the NSSD. It covers all industry sub-sectors, except of food industry. It is a document, which shows the changes that have occurred in this sector in the course of the last years and identifies the pathways of development in a sustainable manner in the conditions of global market economy. The strategy aims at the transfer of the overall public ownership to the foreign and native investors through privatization or concessions, which in turn will create the enabling environment for the reactivation and development of the industry sector in Albania.

For the first time the document of the strategy identifies the chemical industry and those of leather treatment and metallurgy as the most significant and hot ones that cause environmental pollution at dangerous levels in the country. The strategy addresses the environmental protection and proposes the development and transfer of the environmentally friendly technologies.

### V.1.2.2 Legal framework

Actually, alike in other sectors there is no law that explicitly regulates the GHG emissions released from industrial activities performed in Albania. The legal framework that currently regulates industrial processes addresses indirectly the phenomena. From the viewpoint of GHG emissions the aforementioned law is closely related to environmental protection legal framework, therefore both are listed in the box below:

#### Box V2.


- Law "On Minerals", no.7796, dated 17.02.1994 and its amendments;
- Law "On Ionizing Radiations", no.8025, dated 09.11.1995;
- Law "On Hydrocarbons (research and production)", no.7746, dated 28.07.1993 and its amendments;
- Law "On Chemical Substances"; no. 9108, dated 17.07.2003;
- Decision of the Council of Ministers "On Hazardous Substances", no. 459, dated 22.07.1998;
- Law "On Environmental Protection", no.8934, dated 05.09.2002;
- Law "On Protection of Air from Pollution"; no.8897, dated 16.05.2002;
- Law "On Solid Waste Management"; no. 9010, dated 13.02.2003;
- Law "On Environment Impact Assessment"; no.8990, dated 23.01.2003;
- Decision of the Council of Ministers "On Environment Monitoring in the Republic of Albania"; no.103, dated 31.03.2002;
- Decision of the Council of Ministers "On the Norms of Air Emissions" no 435, dated 2002;
- Decision of the Council of Ministers "On the Temporary Norms of Air Emissions" no 248, dated 2003;
- Decision of the Council of Ministers "On Approval of the National Environment Action Plan" no.34, dated 28.01. 2002.

## V. INDUSTRIAL PROCESSES

### V.1.4 Overview of the work done under the Albania's First National Communication

Referring to the Albania's FNC, the share of the industry sector to the overall Albania's anthropogenic GHG emissions for the base year 1994 accounts for 2,96 % or 206.01 Gg versus 7061.45 Gg of CO<sub>2</sub> equivalents.

The main source of CO<sub>2</sub> emissions released from industry is the category of cement production. In 1994, CO<sub>2</sub> emissions released from cement production activities were 118.8 Gg or about 60% of total CO<sub>2</sub> emissions released from industry sector followed by chromium production with 43.89 Gg of CO<sub>2</sub> equivalent, iron and steel with 26.88 Gg of CO<sub>2</sub> equivalent, nitric acid with 11.16 Gg of CO<sub>2</sub> equivalent, and lime production with 4.5 Gg of CO<sub>2</sub> equivalent.

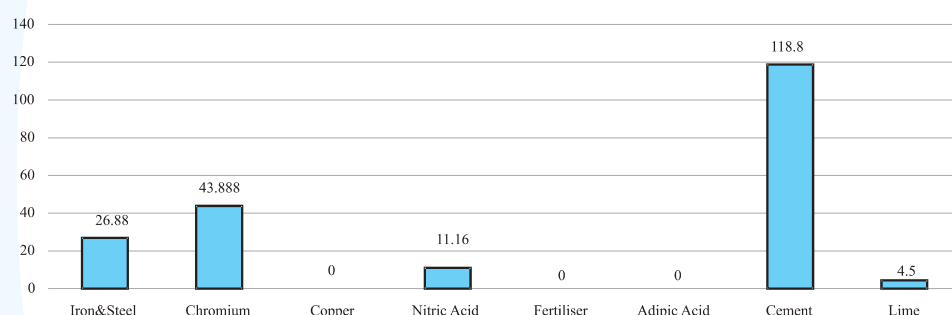

**Figure V.1:** Aggregated GHG emissions in CO<sub>2</sub> (eqv.) from Industrial processes [205.28 Gg], 1994

Estimates show that N<sub>2</sub>O emissions released from industrial processes have a share of 3.77% or 0.036 Gg versus the CO<sub>2</sub> equivalent emissions released from industry sector.

As per the emissions of indirect GHG like CO, NO<sub>x</sub> and NMVOC for 1994, the industry sector has contributed with 0.21 % for NO<sub>x</sub> emissions, 0.04% for CO emissions and 1.23% for NMVOC emissions.

Referring to the baseline emission scenario developed for the industry sector, the cement industry will continue to be the largest contributor with around 817Gg by 2020, while the total CO<sub>2</sub> emissions coming from industry sector are expected to reach the amount of 992 Gg. The estimated amounts of SO<sub>2</sub> and NMVOC emissions by 2020 are expected to be relatively small, only 0.6 Gg and 1.19 Gg respectively.

Due to the lack of statistical data and the fact that the contribution of industry sector to the overall national GHG inventory in 1994 and towards 2020 is not significant, the national team did not develop an abatement scenario for that sector. A set of measures as options to abate GHG emissions from industrial processes was analyzed qualitatively.

### V.1.4 Take the stock of technologies currently in use

#### V.1.4 .1 Cement industry

The technology in the factories of cement industry is mostly the classical traditional one (wet way), while only that of Tirana works in a dry way. The produced cement is of Portland type that is widely used in the buildings as an adhesive hydraulic material, which gives to the concrete a high mechanical solidity, sustainable to the air, water and frosts. Limestone and argyles are used as raw material, which in some cases are replaced with furnace slag and silicate.

Portland cement is being produced by grinding thin preliminary materials precisely dozed, and mixed up with water depending on the way of elaboration. Than, the material in shellac shape gets baked in a high temperature of 1400-1500° C forming a solid material namely clinker. Portland cement is formed by grinding the clinker. The technology foresees also the addition of some supplements of inert and hydraulic properties. The last process is packing and/or storing it in the bunker. The technology is wet or dry depending on the environment when the grinding takes place. The technology is classical of Chinese plants of years 1966 and 1968, reconstructed in 1972 and 1976.

#### V.1.4.2 Lime production

In Albania the lime is produced from the burned limestone. The process is developed in temperatures higher than 900°C in opened furnaces where the pressure of CO<sub>2</sub> becomes equal with that of the atmosphere. The technology is old, local, and without technological lines and machinery.

#### V.1.4.3 Chromium production

Industry of Ferrochrome is constructed firstly in Burrel and after that in Elbasan. Reducing materials with carbon content such as coal and coke are also used besides chrome alloy minerals while melts like limestone, quartzite and bauxite are used as well.

Firstly, chrome mineral is chopped in pieces of 300 mm in size and smaller. After that it gets mixed-up with combustible, metallurgical coke and the melts (quartz). Reduction reactions of oxides with carbon in the process of the ferric bounds continue with the inhalation of the heat so that an outer source of heat is needed. Nowadays, carbonic Ferrochrome is produced in the arc electrical furnace. The process of the Ferrochrome production consists of in the chrome and Ferro oxides reduction with carbonic adapter in chrome mineral.

The process of melting Ferro-chrome in Albania develops in the well-type closed furnaces (loaded with portions covering electrodes of the electric arc) where the mixture of chrome and coke chopped in 80 and 25 mm particles respectively, together with silica is inserted. The technology in Burrel and Elbasan is classical, imported from China in 1979.

### V.1.4.4 Iron and steel

Iron and steel are represented in Albania by the production of cast-iron and steel. First materials for production of cast-iron are ferrous minerals like hematite, limonite, siderites and pyrites, which are mainly found in Middle and East Albania. The main process develops in the furnace where other substances such as melts of limestone and dolomites effecting in the creation of scraps are added while the burning substance is coke.

The process of production of cast iron is classical, producing a melting ferrous alloy with carbon content where the percentage of the latter is higher than 4%. Usually, in addition to production of cast-iron, the production of steel from cast-iron takes place. The process develops in the converter as a closed peer downward covered with heat shield material. Besides the melted cast-iron, other substances like melts, deoxidizes, refiners, and trashes are added. The technology of the production is Chinese since 1974-1976.

### V.1.4.5 Copper production

The industrial production started in 1943 in Rubik. The industrial elaboration is based on utilization of copper sulphur mostly in the shape of chalcopyrite and chalcocine.

In Albania the metallurgical production of copper is performed in the dry way (pirrometalurgy), melting the copper rich minerals with the combustible stuff, which are loaded in the melting furnace that is closed or opened. During the melting the metalline is earned. In these furnaces except the solid stuff, the oxygen that blows downward performs the oxidation of sulphur and carbon in  $\text{SO}_2$  and  $\text{CO}_2$ . Besides metalline, the scraps are also separated. Meanwhile, the metalline is subdued under further processes in the converter oxidizing  $\text{FeS}$ , which turns into scraps in the presence of silica.  $\text{CuS}$  is than oxidized and passes finally into metallic copper, called blister with the rate of 98% cleanness.

The technology is classical with the water-jacket furnaces built since 1943 from Italian industry and reconstructed twice in 1952 and 1971 by Albanian engineers. The further processes are the ones of thermal refinement profiting copper electronically, suitable for the processes of wires and cables production.

## V.2 Identify criteria for assessment

The same assessment criteria<sup>20</sup>, weight and scores<sup>21</sup> are used as for the previous sectors.

## V.3 Selection of key technologies

Despite of its relatively low contribution to the overall GHG emissions, the

<sup>20</sup>(i) Development benefits; (ii) Social acceptability and suitability for country conditions; (iii) Market potential and (iv) contribution to climate change.

<sup>21</sup>1 determines the maximum weight of factors and 100 determine the maximum score of sub-factors.

industry sector was considered along other sectors. For this purpose a set of the following three proposed technology options has been object of the analysis. The GHG abatement technologies analyzed and ranked according to the set criteria are as following:

- *Steel production by using the stock of the scrap (country made and/or imported from the region)*

This way of steel production doesn't consist in a new applied technology. This implies in fact the recycling process in steel industry, where as raw material might be remaining scraps. This process brings advantages to both the economy and the environment by avoiding the process of minerals' elaboration that will produce steel. An important problem to be considered is the right ratio in favor of non-oxidized scraps.

- *The use of hermetic technologies for cement production*

This technology option consists in amelioration of the pollution indexes introduced basically in the cement production process, which can be achieved through:

- (i) The preparation of the base mixture through a mixing system;
- (ii) Full computerizing of the production regime;
- (iii) Change of the technology from horizontal to vertical hermetic systems;
- (iv) Introducing cleaning systems of technologic gases;
- (v) The simultaneous production of the cement with betonies.

This practice is common for example in Germany where certain cement factories have also brought the decrease of cost production.

- *Small interventions in the main process of Ferro-chromium production*

This branch of industry is particularly important for Albania due to huge mineral resources available in the country. The installment of a dust catch system (already present in one of the furnaces of Elbasan Metallurgical Plant) is the first intervention to be undertaken. The second step is modifying furnaces into a direct hermetic system of dust catch. The third step might be the installation of Duplex systems.

A ranking process of the scored technologies has followed and top two technologies have been selected as key ones for intervention in the industry sector. The evaluation matrix of measures is available in Annex I, Table 5. The final selection table is shown below:



## V. INDUSTRIAL PROCESSES

No	Proposed technologies	Points
1	Steel production by using the stock of the scrap	209
2	The use of hermetic technologies for cement production	204
3	Small interventions in the main process of Ferro-chromium production	176.25

The above table shows that the top two technologies that really need to be addressed and implemented in industry category in Albania are those that obtained the highest scores:

### Key technologies in industry

1. Steel production by using the stock of the scrap
2. The use of hermetic technologies for cement production

### V.4 Identification of existing barriers and policy needs

Albania, as all developing countries and economies in transition suffer from many barriers that hinder the technology transfer process. In addition, most of these problems are proved to be present even in industrialized countries. Lack of capital to purchase the modern equipment is a major barrier for this sector followed by the high inflation rates and economic and political instability of the country, which increase the risk for foreign and domestic investors that in turn limit the capital availability.

*Lack of awareness* about climate change, its impacts and human influences is also another barrier, which followed by the lack of information on less-GHG emission technologies, becomes a real constraint for the distribution and transfer of technologies.

*Lack of skilled and trained personnel*, especially in SMEs leads also to difficulties in cases when new equipment is installed as most personnel are always busy dealing and maintaining production levels rather than installing the new equipment.

In addition to the above problems, *inadequate policies and institutional structures* to promote the distribution of modern technologies in industry sector is another barrier. Institutional barriers and policies influence the transition process as well as the efficiency of the transfer process.

#### Box V. 3.

*An effective technology transfer process in industry sector requires interactivity between various players like users, producers, and developers of technologies. The variety of the stakeholder specter makes it necessary to have a clear as part of the industry policy framework for technology transfer and cooperation. Such a framework may include environmental, energy, international trade, taxation, patent legislation as well as a variety of well-aimed incentives. Policy makers are responsible for developing such a framework. The interactive and dynamic character of technology transfer stresses the need for innovative and flexible approaches through partnership between various stakeholders, including public-private partnerships. There is a strong need to develop the public and private capacities to access and select technologies, in particular for state-owned and SMEs. Stakeholders (Policy makers, private investors, financial institutions) in developing countries have even more difficult access to technology information, emphasizing the need for a clearinghouse of information on climate change abatement technologies well integrated in the policy framework. To be successful long-term support for capacity building is essential, highlighting the need for public support and cooperation of technology suppliers and users.*

**Methodological and technological issues in technology transfer. IPCC. 2000.**

### V.5 Define and select actions

Top two technology options selected in section V.3 are addressed in the project ideas proposed (see Annex II). There are two project ideas proposed in this Annex as flowing:

1. *Steel production by using the stock of the scrap*
2. *The use of hermetic technologies for cement production*

## CHAPTER II

# TECHNOLOGY NEEDS ASSESSMENT FOR ADAPTATION TO CLIMATE CHANGES

## TECHNOLOGY NEEDS ASSESSMENT FOR ADAPTATION TO CLIMATE CHANGES

### Introduction

TNA for adaptation to climate change is a continuation of the work performed under the Albania's First National Communication on vulnerability and adaptation. Unlike the Albania's FNC the TNA for adaptation is focused on Albania's coastal area rather than on its overall territory.

### Why Albania's coastal area?

Albania's coastal area is the most important part of the country from the economic and human activity viewpoint. It generates a large number of services and goods that are valuable to the country. It has attracted many people and investors, especially for the tourism development opportunities.

The vulnerability analysis under Albania's FNC has indicated this area as of high vulnerability to current climate. Expected changes in temperature and precipitation patterns as well as the expected increase in the sea level are likely to impact significantly this area. This is the main reason that the vulnerability and adaptation team has decided to narrow the focus of assessment to this area.

#### Box 1.

*Coastal adaptation to climate change must be seen as part of a broader coastal-management policy, which includes consideration of numerous non-climatic issues. It typically follows a continuous and iterative cycle involving four main steps: (i) information development and awareness raising; (ii) planning and design; (iii) implementation and (iv) monitoring and evaluation. To date, technology transfer for coastal adaptation has focused primary on the implementation stage: the actual hardware that can be employed to protect, retreat and accommodate. Coastal adaptation should also aim at increasing at the extent to which mechanisms are in place and technologies, expertise and other resources are available to assist.*

*IPCC Methodological and Technological Issues in Technology Transfer, 2000*

# I. COASTAL AREA

## I.1 Overview of options and resources

### I.1.1 Profile of the coastal area

This area lies along the Adriatic and Ionian seas, the overwhelming part of the Western Plain, Albanian Riviera and the coastal area south of the country.

The littoral has a surface of 10050 km<sup>2</sup> or 35% of the country. About 75% of this territory is plains and hills, while the rest are mountains. This area includes 14 districts, 119 communes (rural) and 30 municipalities (mainly urban). In 2002 as compared to 1960, the number of cities covered by this area doubled from 17 to 34, while the number of villages grew 1.67 times i.e. from 624 up to 1044.

The southwestern coast of Albania lies on the Ionian Sea known for its depth.

Riviera is the hottest part of the country. The Ionian coast, about 100 km long is mainly high and eroded.

Mountains reaching up to 2000 m high dominate this coast. In various sectors they fall right into the sea. Erosion and the carstic phenomena have created in some places carstic pits, only small part of which have already been explored so far. In the other parts landscape is completely different. Mountains are replaced by little plains (Borshi, Qiparo, etc.).

Some lagoons are situated along the sea-coast. The main ones are lagoons of Karavasta, Narta and Butrinti.

The total river discharge into the Adriatic Sea is of 25.6 km<sup>3</sup>. This water volume corresponds to a mean annual discharge of 814 m<sup>3</sup>/sec or a module of 29 l/s/km<sup>2</sup>. The contribution of the rivers discharging into the Adriatic Sea (95%) is very large in comparison with the rivers discharging into the Ionian Sea (5%).

The coastal area is a region with scarce *water resources*. The water module of this region is less than 10 l/s/km<sup>2</sup>. During the wet period of the year, the total annual precipitation in the coastal area is lower than in the other parts of the territory. Therefore there is a small contribution from this area to the water flow. The main water uses are: drinking water supply, industry, agriculture, hydropower etc. The drinking water is taken mainly from groundwater resources (captured at springs or pumped from wells).

*Agriculture* has always been, and is still, the main resource of Albania and therefore of the coastal area where it is more developed. The irrigation network is yet suffering by direct destruction or by lack of maintenance.



Source: Encarta 2000

**Figure I.1** Map of Albania

The *coastal forest* occupies only 33700 ha or 3.2 % of the total forest area of the country. The forest area along the Ionian coast covers 12700 ha or 37.6 % and that one along the Adriatic coast covers 21000 ha or 62.4 %. Forests have a standing wood stock about 2756000 m<sup>3</sup> or 3.4 % of the standing wood stock of all the national forests. Over this territory everyone can see all the vegetation flats, beginning with oranges, olives and evergreen forests, continuing with deciduous forests, black pine, silver fir and *Pinus leucodermus* forests, with Mediterranean alpine pastures on the highest elevations.

The main forests are the mixed conifer and broadleaves forest in the Llogara region and single-species broadleaves forest in the Karaburun-Vlora district; the oak forest in Gradishta, Gjeneruk-Lushnje, Ishmi-Durres, Renci-Lezha and Shkodra; the *Quercus aegilops* forests in Mile, Kakome-Saranda, Himara, Karaburun and Tragjas-Vlora; the Mediterranean pine forests (*Allepo pine* and *Stone pine*) in Porro-Vlora and Fier districts and in Divjaka-Lushnje. All the man-made forests, mainly based on Mediterranean conifers, are located along the coast as a shelterbelt to protect the crops from sea sale winds (Kume of Vlora, Seman coast of Fier, Spille and Golem-Kavaja, Bisht Kamez and Rrushkull-Durres, Fushe Kuqe-Lac, Tale, Kune, Vain, Shengjin-Lezhe and Velipoja-Shkoder) and to green the territory (Saranda mountain); and shrubs which are mainly found along the Ionian coast [Demiraj etc. al., 1996]. Also some experiments have been established by planting of fast growing and exotic species, such as the *Monterey pine*, *red pine*, *eucalyptus species*, etc. [Demiraj etc. al., 1996].

During 1960-1990 the population of coastal zone grew by average 28429 inhabitants per year, Meanwhile during 1991-2002, the rate of grow was 21217 inhabitants per year, and the population density reached about 200 inhabitants/km<sup>2</sup>.

In early 2002, the population of coastal zone was 2.15 times higher than in 1960 and 7.5% more than in 1990. In 1990, the share of population of the coastal areas was 52% and 60% in 2002.

## I.1.2 Coastal policy framework

Albania's coastal area has been and still is in the focus of many studies and development strategies of relevant sectors. Despite of those studies that address climate change issues the rest do not take into consideration adaptation issues of this area as a consequence of expected climate changes. A short analysis of these studies and strategies is given below:

*Coastal Zone Management Plan (CZMP) for the North and South Regions of Albania's coastal Zone* (PAP/MAP-UNEP, July 1995) and *CZMP for the Region of Durrësi – Vlora* (PAP/RAC, February 1996). This Plan analyzes coastal and marine pollution, inadequate water and waste management, over-exploitation of natural resources, improper placement of structures and settlements, inadequate protection of and research on archeological heritage, inadequate protection of biodiversity assets, incomplete strategy for the tourism develop-



ment, inadequate protection of architectural resources, incomplete legislation, etc. It also proposes response actions for the management of the coastal zone of Albania. All proposed actions in the CZMP are evaluated taking into account (i) biodiversity and environmental protection; (ii) tourism, conservation and cultural heritage; (iii) institutional capacity building. Climate change impacts and adaptation issues are not considered at all.

*National Strategy for Development of Tourism.* The strategy is adopted in 2002 by Albania's government. It is conceived in two parts. The first part, namely analysis of potential and crossroads emphasizes that Albania may use more than actually its resources in the favor of tourism. The second part describes the conceptual strategy and the developing program for Albania to be a future tourist destination. This concept asks for Albania to increase at full blast the sectors' potential and to develop a sustainable tourism (in all sectors: cultural, social, environmental and economic)<sup>22</sup>. However, there is no consideration of the impacts and implications of expected climate change to this sector.

*Implications of climate change for the Albanian coast* (MAP Technical Reports Series, No. 98. 1996). This is a study performed under the UNEP Mediterranean Action Plan (MAP) and completed in 1996. It summarizes the very first efforts of a multidisciplinary task team to examine the possible consequences of increases in temperature and mean sea level and of the changed climate for the Albanian coast and to estimate its possible implications for the terrestrial, aquatic and marine ecosystems, population, land use and other human activities. This is also the first study performed in Albania on climate change phenomena.

*Albania's First National Communication to the Conference of Parties of the United Nations Framework Convention on Climate Change.* This Report is performed in the framework of the project namely "Enabling Albania to prepare its FNC in Response to its Commitments to UNFCCC", funded by GEF and completed in 2002. Among other studies it includes a study on vulnerability assessment and adaptation options. It assesses the impact of expected climate changes and measures to adapt them. The study, carried out in accordance with the IPCC guidelines of 1994, is focused on the assessment of the expected climate impacts in hydrosphere, natural and managed ecosystems, energy, tourism, health and sanitation, and population. The study covers all the Albania's territory. In order to investigate the likely influence of climate changes three time horizons have been considered: years by 2025, 2050 and 2100. A set of alternative suggestions/recommendations that must be taken into consideration during the process of preparing the national strategies has been proposed guided by two main goals: (i) the promotion of sustainable development (with objectives: regional economic development, environmental protection, equity); and (ii) the reduction of vulnerability (with objectives: minimize risk, minimize economic losses, increase institutional response).

*Preservation of Mediterranean wetlands and coastal ecosystems* (Narta/Karaburun and Vlora). (UNDP/GEF, ALB/98/G33/1G/99). This is the national com-

<sup>22</sup>Tourism Development in Albania. May 2002

ponent under the Mediterranean regional project that includes Albania, Egypt, Lebanon, Morocco, Palestinian Authority and Tunis. The project is funded by GEF and is designed to reinforce the legal and regulatory conditions, the institutional conditions and the tools required for the conservation of biodiversity under threat in the wetlands and coastal areas of the Mediterranean basin, at the regional level, as well as at the national and local level in each of the countries having ratified the Convention on Biological Diversity. After a detailed assessment of the local threats to biodiversity on each of the selected sites, the project will identify and apply the innovative tools required for integrated management, including particularly the use of land policies complementing the regulatory system and formulating adequate policies for wetland management. It will endeavor to develop those management systems and build capacity both at the national and local levels, and focus on awareness-raising, information and participation of the various stakeholders, especially at the local level, whose involvement in the project will create the conditions required for its success and replicable to other sites, along the national coastline and in the Mediterranean region.

## I.1.3 Overview of the work done under the Albania's First National Communication

This section summarizes some of the main findings of the vulnerability and adaptation study performed under the Albania's FNC as regards the coastal area.

The expected changes are summarized in Table I.1.

<b>Table I.1: Expected climate and sea level changes</b>			
Scenarios for Albania	Time horizon (year)		
	2025	2050	2100
Annual temperature (°C)	0.8 to 1.0	1.2 to 1.8	2.1 to 3.6
Annual precipitation (%)	-3.8 to -2.4	-6.1 to -3.8	-12.5 to -6.0
Sea level (cm)		20 to 24	48 to 61

Climate change scenarios for Albania lead to an annual increase in temperature up to 1°C, 1.8°C, 3.6°C respectively by 2025, 2050 and 2100 and a decrease in precipitation up to -3.8%, -6.1%, -12.5% by the same time horizons. Sea level is expected to increase up to 20 -24 cm by 2050 and 48-61 cm by 2100.

Analysis of future scenarios on seasonal temperature and precipitation changes show that we may expect milder winters, warmer springs, drier autumn and hotter and drier summer. The expected severe summer with higher temperatures (increase up to 4.1°C) and lower precipitation (decrease up to -27%) over all the territory, followed by the increase in drought duration, intensity and frequency may impact negatively in many sectors. The vulnerability caused by extreme events is evident even nowadays (an example in figure. I.2), so the expected increase in their frequency might cause irreversible damages if no necessary adaptive measurements will be taken.



Source IHM

**Figure I.2** Case of an extreme event. Flood of Seman River on 25.09.2002.

The most important vulnerabilities found under Albania's FNC that might impact especially the coastal area, are the following:

- Decrease in the long term mean annual runoff, estimated to vary between 9 and 23% by 2050 and wider limits by 2100 respectively would affect the surface water flow, reducing its amount;
- Under the conditions when climate change would modify rainfall, evaporation and soil moisture storage, the capacity of reservoirs and irrigation distribution systems will decrease more, therefore increasing the irrigation requirements;
- Insufficient irrigation would be a more important restrictive factor to the yield crops for the years 2050 and 2100, if appropriate measures will not be taken for the rehabilitation, the maintenance and improvement of the conveyance and distribution systems;
- Under reduced surface flow and increased evaporation, the storage of reservoirs will decrease, which will effect the energy production by hydropower stations;
- Albania is heavily reliant on hydropower electricity production. A 20% reduction in natural water runoff was estimated to cause a reduction in power generation of 60%. Thus, a heavy reliance of hydropower may be good for reducing greenhouse gas emissions and improving air quality in Albania, but can increase vulnerability to climate change;
- Because of the reduction of stream flows in the wetlands, western part of Albania would experience both increased demand and reduced supply for water, which would decrease wetland area;
- Other consequences of expected warming include not only changes in total water amount and levels, but also erosion of riverbeds, and modification of turbidity and sediment load;
- Water quality is expected to degrade. This not only due to climate changes, but also because of the new industrial and agricultural development. The main hot spots for this problem are the districts of *Tirana, Fier, Korçë, Kavajë, Durrës, Vlorë, Elbasan and Berat*;
- Agriculture may suffer from the reduction in the extent of arable land due to soil erosion and alteration. Changes might occur in the growth cycles, harvest time and the quality of the agricultural production, especially along the coastal area, owing to an increase in salinity due to the sea level rise and

- intrusion of salt water into the soil;
- The expected changes are likely to bring about better living conditions for existing fish species or for the migration of others. The expected increase in salinity and sea water temperature could affect the inflow of nutrients from rivers or from the upwelling of deep water;
- A set of important impacts is specified in forestry. Eu-Mediterranean evergreen forest of Lauretum flat (*Lw- warm Lauretum*) would adapt to the expected conditions (temperature and precipitation) and would spread to higher altitudes, up to 150 m by 2025, 275 m by 2050 and 500 m by 2100. Eu-Mediterranean evergreen forest mixed with deciduous tree of Lauretum flat (*Lm- middle Lauretum*) would adapt and spread to higher altitudes about 150 m, 250 m and 500 m respectively by 2025, 2050 and 2100. etc.;
- The forest species that resist against high temperatures and severe long dry seasons would be able to over live. For those that need moisture (*silver fir*, etc.), the danger of being limited in distribution or disappearing does exist. Species that produce many small seeds and have a high distribution potential (*Pinus* etc.) would be able to survive and to spread at sea level, whereas oak species, which produce big seeds would occupy new areas but very slowly;
- Climate change may also affect the supply of energy from solar and wind power. A likely increase in the global solar radiation and the hours of sunshine will lead to an increase of potential for solar energy use in different energy services. The increase of the wind speed up to 1.3 to 2.3 % related to the period 1961 – 1990 by 2050 and 2100 respectively might be of interest to think about introducing wind energy in the energy schemes in the future;
- Shortage of drinking water of adequate quality could be especially keen during summer. As a consequence, an increase in contagious diseases cases, digestive system diseases, etc., is expected;
- Increase in temperature would not affect the physiological and compensatory system of healthy people. Thus, age groups like: babies, children and elders where the decrease in compensatory system is common, will have changes in their health condition, which would cause higher incidence of some diseases influenced by atmospheric changes. The infections in the respiratory system will be the most visible.

The sea level rise of 48-61 cm by 2100 might impact to:

- Direct flooding of coastal area. With increasing sea level rise, flooding will be intensified both directly by the sea and indirectly by changes in water tables. The beaches belonging to the areas affected by land subsidence (those of Shëngjin, Kune-Vain, Tale, Patok, Ishëm), and a substantial number of fields (drained in the late '50s and early '60s.) will be swept over by floods. Likewise, these floods will find their way into important segments of the local and national roads (including a part of the new road Fushë Krujë-Lezhë running through the former Lac swamp land);
- Increase in the salinity of aquifers especially for the coastal area would impact the potable water supply sources (located in Lezha and Laç plains), as well as many lodging and tourism structures which have been, and continue



to be built along these beaches;

- Floods will partially affect the beaches situated in the territories undergoing elevation (those of Durrës, Golem, Divjakë, Himarë, Borsh etc.), in addition to the tourism infrastructure. The same lot is expected to be suffered by agricultural land (in the former swamps of Durrës, Myzeqe, Narta, Vrug etc.) as well as dwelling centers and rural infrastructure which reach up to 50 cm above the sea level; then the entire dwelling places, hotels, roads and agricultural areas etc. situated in the lower zones of the Adriatic coastal line (excluding the territories under the effect of raising movements) will be flooded;
- Natural communities associated with such areas are expected to move inland. However, certain communities including existing coastal dunes, saline marshlands and wetlands are likely to reduce their surfaces and, although new dunes, marshlands and wetlands may gradually form elsewhere;
- Infrastructure such as sewers, water supply, electricity and other service could be flooded and corrosion of pipes and intrusion of seawater into pipes and sewage systems will occur;
- Sea level rise will impair estuarine water quality in other subtle ways, contributing to the degradation of in situ conditions for aquatic biota (e.g. increased temperature results in lower dissolved oxygen) and increasing the health risks of the populations dependent on withdrawals of fresh water from the rivers;
- Sea level rise, by directly influencing the increase in the ground-water levels and composition, would limit the growing of some forest species that do not like the moisture and salt along the Adriatic coast;
- Coastal tourism is expected to suffer the vulnerabilities caused by sea level increase. The possibility for new beaches to create (in a natural way) does exist, but building a new tourism infrastructure would require huge investments.

A set of adaptation options for each sector has been identified. A long list of adaptation options for every sector is already identified under Albania's FCN taking into account two main objectives (i) *promotion of sustainable development* and (ii) *the reduction of vulnerability*. The adaptation options are identified taking into consideration the principles such as prevention of loss, tolerating loss, sharing loss, changing use or activity, changing locations, research and restoration. The most important options are defined by a detailed selection procedure (using the screening, effectiveness and multi criteria analysis)<sup>23</sup>.

The adaptation options proposed for each sector under analysis are given as following:

#### *Water resources:*

- Modification of existing physical infrastructure;
- Construction of new infrastructure;
- Water pollution control;
- Improvement of the monitoring and forecasting system for flood and drought;

---

<sup>23</sup>Draft "Vulnerability Assessment and Adaptation Options"

- Drafting and approval of new legislation for water use;
- Setting a real price for water use;
- Implementation of the Integrated Coastal Zone Management.

### *Natural ecosystems:*

- The establishment and maintenance of protected areas (in situ conservation);
- The active management of wild populations outside of protected areas (inter situ management);
- The maintenance of captive populations (ex-situ methods);
- Monitoring of species.

### *Agriculture:*

- Afforestation and the setting up of the barriers to protect the arable land threatened by soil erosion and alteration;
- Planning of agricultural production toward xenophile crops to allow adaptation to the higher winter and summer temperatures and to the scarcity of water in summer. Agricultural development should be adjusted towards species that would adapt best to the expected soil and atmospheric conditions;
- A significant improvement of irrigation systems.

### *Forestry:*

- Formulation of the Sustainable Forest Development Strategy;
- Preparation and implementation of the study-research programs for forest management;
- Increasing of the protected forest area;
- Reducing the illegal cuttings;
- Increasing of the investments to implement more actions in existing forests;
- Implementation of the actions to increase the existing forest productivity;
- Increasing of the forest area through reforestation;
- Monitoring of the forest health;
- Studying and monitoring the fire situation in forests;
- Reduction of the wood consumption for energy.

### *Energy:*

- Consider runoff/water flow rate expected change in integrated resource planning;
- Account for the expected change in runoff/water flow rate in the design of thermal power facilities;
- Account for the expected change in runoff/water flow rate in the design of hydropower plants;
- Invest in energy conservation (Demand Site Management) measures for space cooling;
- Reduce energy subsidies.

### *Sanitation and health:*

- Exercise permanent control over the drinking water quality;



- Exercise permanent control over water supply and sewerage systems affected by salt-water corrosion and intrusion in coastal areas;
- Permanent monitoring and the drafting of a new law for air quality.

## *Population, tourism*

As expected by 2025, about 60% of the general population would be settled in the capital and the coastal area. The major economic sector will be that of services, which is expected to employ 40-50% of the active population in this region. To have a good functioning of the services sector, the following measures need to be taken:

- The provision of new potable water supply resources and the construction of new water supply, filtration and distribution systems;
- The provision of new power supply resources and the rearrangement of the appropriate distribution system;
- The construction of new sewage systems for both households and industry, as well as of new processing units for all the urban solid waste.

### **I.1.4 Take the stock of technologies currently in use**

This section makes a general review only for those adaptation technologies that are currently in use. These technologies are not applied for coastal adaptation purposes but indirectly help to adapt to the climate changes. The reviewed adaptation technologies that are currently in use in the coastal area are classified according to the following categories: (i) Climate; (ii) Water resources; (iii) Agriculture; (iv) Livestock; (v) Fishery; (vi) Forestry; (vii) Tourism and Population; (viii) Health.

#### **I.1.4.1 Climate**

The following technologies are related to the climate system. As highlighted above they are not applied for adaptation purposes but nevertheless their application helps to adapt to the current and future changes of the climate system.

##### **I.1.4.1.1 Alternative sources of energy**

The use of alternative energy sources such as the solar, wind and hydro energy have significant impact to the reduction of GHG emissions which in turn will reduce air pollution. Efforts of utilization of solar energy have been tried since the '80s, but its practice utilization in Albania in private form for the family use started after '90s. Utilization of this technology is very potential due to considerable number of sunny days per year.

The utilization of hydro sources it is very well developed. Albanian power system relies practically on hydropower plants. Over 90% of energy comes from hydro sources. For more information on alternative energy sources refer to chapter I, section I.1.4. As far as wind energy in Albania is concerned, it is still in the research phase.

## I.1.4.1.2 Air quality monitoring


There are actually five stations for monitoring of air quality in our country. These stations are almost distributed uniformly to overall Albania's territory. Some air quality elements such as dry deposits and chemistry of rain are measured and their physical-chemical properties are analyzed. Perturbation of atmosphere and SO<sub>2</sub> concentration are measured only in the Tirana station.

Establishment of the air quality monitoring system is very urgent, as well as upgrading the existing meteorological service, in order to assess the possible increase in air contamination and in time danger warning.

## I.1.4.1.3 Meteorological network

Monitoring of meteorological elements in Albania, which is very important to evident the climate changes and variability, started since the end of XIX century. It is established and strengthened in the 50s, spreading out in all territory and in the same time increasing the number of meteorological elements measured. After its "blossoming" in the 1980 (about 230 meteorological stations) the national meteorological network in Albania reduced drastically in 1990 and nowadays grew up to 126 meteorological stations (Figure I.3).

In general, the current measurement technology used for some meteorological elements is very old and measurement error is considerable. In addition, lack of equipment remains a problem. The stock of equipment consists of: 10 pluviographs measure the intensity of atmospheric precipitation, 4 stations sunshine duration, 14 stations measure wind whereas only 3 of them have electric equipment. Meanwhile, the evidence of atmospheric events as the number of dew days, number of frosty days, number of hail days etc., is monitored almost over all our meteorological stations. It is planned to replace gradually the old technology with a new one. At present, 2 automatic stations are installed.

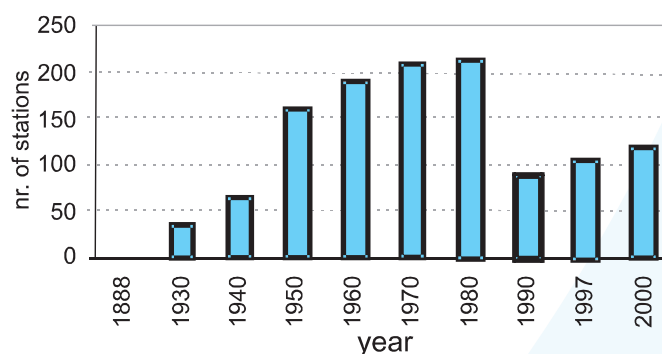

Source IHM

**Figure I.3:** Changes of meteorological network.

## I.1.4.1.4 Hydrological network

The Albanian hydrological network is established in 1949, but before this date there were 4 water gauges observing the water level only.

In 1989 the National Hydrological Network (NHN) was composed by 207 stations, from which 159 in rivers (35 with recorders), 10 stations in lakes (6 with recorders), 32 stations in springs and irrigation channels and 6 stations in sea-coast and lagoons (all with recorders). After 1990 the NHN was seriously damaged. The number of the stations was reduced and the quality and quantity of all hydrometric activity has been affected. Currently the NHN consists of 103 stations, from which 92 in rivers, springs and channels, 6 stations in seacoast and lagoons and 5 in lakes.

The main parameters monitored are: (i) *water level* by the staff gauges or automatic recording system (15 analogue water level recorders, 5 electronic level recorders and 2 D.C.P), (ii) *river discharge* by the method of flow velocities, using the current meters.

As far marine monitoring network, tide parameters, wind, water temperature and some chemical elements are measured. Currently, no recorder devices exist.

## I.1.4.1.5 Meteorological and hydrological data transmission

At present, the Hydro Meteorological Institute (HMI) controls the actions of data transmission from stations to the collection and processing center in Tirana. The most important role, especially in using the meteorological data in the weather forecast is the way of transmission of the meteorological data from stations to the HMI.

At present, in some stations transmission is made by phone on daily basis for data of the extreme temperatures and precipitation. Monthly data monitored from all stations reach the center one month later by mail. For the field activities linked to hydrology (collection of water level data, discharge measurements etc.) the tasks are distributed among 8 regional centers. All the data monitored on the site reach the center (HMI) once in two months.

This procedure is not available and effective for weather and extreme event predictions, and especially for prediction of river discharge and warning of the agriculture land inundation. This is why HMI is making efforts to build up a minimum network with automatic meteorological and hydrological stations in order to transmit in distance and in real time.

All the hydro meteorological information sent to the Institute by mail, after processing is archived. This procedure needs a lot of time due to the lack of the network system computers. The meteorological archive consists of raw and processed data of air temperature (all indexes - minimum, maximum, and mean); precipitation (daily, monthly, yearly amount, intensity for different time

duration etc.); wind; sunshine radiation; humidity, etc. The hydrological data archived are the mean daily water level, monthly and yearly mean, maximal and minimal water level, daily discharge and monthly and yearly mean, maximal and minimal discharge. All these data are stored in the paper format and only a part of it is in the electronic format. Nowadays they are under the digitizing process. A very simple method, the alpha numeric one, is in use so far. Updated software to create the hydro meteorological databank is imperative.

### I.1.4.2 Water resources

#### I.1.4.2.1 Defense structures

As previously highlighted, coastal and river's technologies are currently set up to cope with climate variability and not directly with adaptation to expected climate changes. However, they can be applied for adaptation purposes as well.

Technologies available in some considered hot spots consist in constructions of defense structures in river management as man made water falls, dams, forestry etc., in mid and lower Vjosa, Seman and Shkumbini basins. The same measures were taken in mid Osumi river basin around Berati city. There are some other unfinished measures in Buna River.

Saranda's immediate coastal zone has around 1 km area protected by coastal protection units (armor units of tetrahedron shape). These measures were taken to avert coastal erosion and aid in pedestrian's circulation.

The same protection measures were undertaken years ago in the Durrës coastal zone for the management of the coastal infrastructure (the Currila Beach). The cubic armor units were used in this location. In Porto Romano (Durrës) zone the coastal protection is protected with cross-section armor units (perpendicular to coastal line) and tetrapode armor shape units, for a few hundred of meters. This is build to protect the wetland from the sea erosion. The aforementioned cubic armor units are also used in Vlora beach to enlarge and facilitate the road circulation.

The main aim of these measures was the management of the coastal infrastructure but it is also a suitable adaptive technology to climate change. Unfortunately all these measures are not taken in the framework of a general management plan. Only in few zones an accurate study is performed. The Laboratory of Hydraulics has studied some particular aspects of the problem but the lack of technology is an obstacle to them. The most problematic zones near the sea-shore are listed below:

- *Zhuporo (Vlore)*. In this area the erosion is already a well-known phenomenon. This is a problematic zone and so far no measures have been taken;
- *Lalzi (Durrës)*. During the last 20 years a big change of the seashore line has been observed. The intrusion of the sea in land is still a very problematic and uncontrolled event; (Figure I.4)
- *Patok Beach*. This beautiful beach currently doesn't exist any more. The sea has flooded all the area;

- *Velipoje*. If no measures are taken this beach is designated to disappear;
- *Karpen (Kavaje)*. Significant erosion is observed in this area too. The dunes along the seashore that used to be meters far from the sea now are under the sea level;
- The delta of *Hoxhara Chanel (Vjose-Seman)* it's a heavily eroded zone, as well as *Terkuza delta*.



**Figure I.4** Bunkers into the sea as evidence of the sea intrusion - Porto Romano, 2003

As regards the *irrigation system* the most problematic systems are the drainage systems of *Velipoje*, *Shengjin*, *Spitalle* which are in danger. In the *Karavasta* area, *Hoxhare*, *Vrina*, *Butrinti (Sarande)* *Narta (Vlore)* an ecological disaster is inevitable. The existing irrigation system has a small hydro module and they have never been modified or reconstructed so far.

The same situation is for the hydropower stations. Only this year a discussion about a project to remove the sediments from the reservoirs has started.

### I.1.4.3 Agriculture

Currently, small farming practices and related businesses in Albania are risk-averse and use of new technologies is also discouraged through lack of information; financial and human capital, transportation, temporary tenure; and unreliable equipment and supplies.

Farming practices of the coastal areas of Albania have been challenged by the relatively long persistence of warm climate associated with extended periods of drought especially during the last decade. On the other hand, during the same period the coastal areas were demographically overloaded by new settlers displaced from the unproductive and poor agriculture areas of the north to the more fertile soils of the coast. However, the new settlers have predominantly populated the hilly areas located in the suburbs of the big cities making possible the utilization of the agricultural land in those parts.

#### I.1.4.3.1 Land management practices

Dealing with the slope configuration like leveling, roughening, bench terracing of the occupied land helped new farmers incur into some sort of spontaneous adaptation measures to ensure the expected production.

Land leveling has been practiced by the new settlers for the reduction of runoff and improvement of water uptake in soil surfaces less than 1 acre. This surface was barely able to cover the survival needs of a farmer's family.

Bench terracing and field subdivision was an approach applied to soil surfaces bigger than 1 acre and involving several farmer families with parental ties.

Roughening of the land surface was another approach. Although not at the extent of the previous measures, some farmer families have adopted this practice when settled in ridges nearby a stream.

The above set of adaptation measures was mostly spontaneous and lacked a genuine technology approach.

### **I.1.4.3.2 Soil management practices**

The new settlers from the north who populated the coastal areas made possible the utilization of the available free steep land surfaces, which were mostly highly eroded and suffered from lack of irrigation. To render the surfaces productive the farmers incurred the following measures:

Application of minimum tillage is usually applied, as it is rather inexpensive. However, it is time consuming. Especially the new settlers have used this adaptation approach in many farming practices.

Application of contour cropping to slope is another approach that has been principally applied by farmers making use of agriculture land bordering a slope prone to erosion. Mainly crops with a highly developed root system have been selected.

Use of lower planting densities is another practice that help adaptation, used mainly to conserve soil moisture and nutrients.

The persistence of drought in the coastal areas and the average increase of temperature have exerted a considerable moisture stress in cropping practices in the coastal areas. This has urged farmers to:

- *Change farming timing to better fit into new climatic conditions*

This has been mostly achieved through *advancing the sowing dates to offset moisture stress during warm period*. Agriculture soils of the coastal areas in Albania have been persistently exposed to prolonged drought.

- *Improve water use efficiency and control erosion*

Shortages of the water resources due to persistent droughts imply problems with water availability and use by the farmers. To face the challenge many farmers have incurred into some adaptation measures such as: (i) Use of low cost pumps for water supply; (ii) Adoption of drip irrigation system; (iii) Digging of line canals or installing low cost pipes.

### **I.1.4.3.3 Planting management**

Agriculture soils of the coastal areas in Albania have been persistently exposed to prolonged drought. On the other hand the shortages of the water resources imply constraints on water availability and utilization by the farmers. To face



with these challenges many farmers have incurred into some adaptation measures aiming at better coping with current climate. Change of planting time through early sowing in order to offset moisture stress during warm period has started application at present.

In addition, farmers are using other practices to overcome water shortages such as use of low cost pumps for water supply. This practice has been strongly supported by the counties water use associations, specially introduced and promoted through workshops organized with farmers.

In some areas the drip irrigation system has been adopted. The introduction of this low cost approach appears to have been very well accepted by some farming practices.

Digging of line canals or installing low cost pipes is another measure that has been extensively applied for irrigation purposes in farming practices of the coastal region.

Livestock and livestock production in the coastal area has been stressed by higher temperatures especially during the summer period. This has affected to a certain extent the expected yields and decreased the profits.

#### **I.1.4.4 Livestock**

##### **I.1.4.4.1 Farmhouse microclimate control**

This is a kind of adaptation technology that helps keeping under control the farmhouse microclimate inside the range of thermal neutrality. This technological approach consists in the thermal insulation of the farmhouses. Thermal insulation is made through the use of thermal insulation constructing materials, sometimes by using asbestos as insulation material, which is not environmental friendly. Some big poultry breeders have invested in improving the ventilation devices of their premises and inserted in some cases air conditioning facilities.

##### **I.1.4.4.2 Disease prevention and control**

The general increase of temperatures and especially the mild winters of the last decade in Albania have apparently created the conditions for the breeding of previously unknown insect species mainly inhabiting the tropical regions. These insect species are notorious as vectors of infectious diseases spread in animals. A previously unrecognized parasite insect species, namely *Culicoides imicola* feeding on blood of its host (sheep) has recently appeared in Albania. With the appearance of this new species a massive outbreak of a viral disease known as Bluetongue affected the sheep population of the country, which in turn impacted animal husbandry that suffered from considerable losses in terms of mortality, decrease of production etc.

Considering the situation veterinary services have adopted a set of measures aiming at early identification of the disease in animals and the control of its

widespread. These measures consist in a rapid serological test for the identification of the disease and stamping out of the infected animals to prevent the widespread of disease.

### **I.1.4.5 Fishery**

Fishery activities along the coastal areas of Albania have been affected by the climate variations especially during the last decade. The eutrophication of some wetland areas, the increase of sea level and water temperatures associated with a decrease of salinity have brought to an abnormal growth of toxic phytoplankton. As a consequence, in some harvesting areas of bivalve mollusks, abnormally high levels of toxic phytoplankton have been detected. In addition, in some mollusks species, exceeded high levels of some neuro-paralytic bio-toxins have been detected.

There is a growing concern expressed by the mollusks breeders in terms of ensuring the safety of their products for human consumption. Measures are undertaken to combat the situation and consist in setting up of warning systems in the harvesting areas to alert the onset of abnormal phytoplankton blooms. It is followed by a fast screening test for the detection of bio-toxins in shellfish species.

### **I.1.4.6 Forestry**

The proposed technologies/measures under Albania's FNC for the forest categories are mainly a usual practice in Albania, but not properly applied. They do not take into consideration the expected changes of climate and measures to adapt the forest to these changes.

#### **I.1.4.6.1 Addressing climate change issues to forest development strategies**

The forest sector in Albania is being managed according to a National Strategy and Action Plan for Forests and Pastures. As highlighted in the chapter I, section II.1.2.1 the strategy and action plan *does not take into account the climate change and its implications*. In this context, it is an imperative need the preparation of a new strategy or to revise the current strategy in order to reflect the climate change impact, implication and adaptation of forestry to climate change.

About 100 % of the forest area is managed in accordance with the management plans but these plans need to be reviewed according to the objective to adapt the forest system to climate changes. It is imperative to favor more adapted species to the expected changes of climate and sea level rise also, and species that have not capability to occupy the flats in new likely conditions.

Many studies and research projects in the forest sector are under way. Most of them lack to take into consideration the climate change issue.

## I.1.4.6.2 Increase of forest productivity

Actions to increase the existing forest productivity or average annual increment are undertaken through interventions in nature forests for rehabilitation of degraded forest, conversion of coppice and shrub forests to high stem forests with the same species, mostly broadleaf species or planting the fast-growing species or more capable species to absorb CO<sub>2</sub> emissions. Interventions have always been made to have mix forests in a area over half of the total forest area and to better manage the pruned forest area (mostly oak and beech forests) for fodder in conditions of small livestock husbandry increasing, mostly goats.

Some fast-growing forest species are experimented and a few of them have resulted successful, such as poplar hybrids, Monterey pine, Douglas fir and, seaside pine. Some others are under experimentation. The possibility to plant some of them in considerable area is under the studying process. There is a need to import the seeds of controlled origin by USA or New Zealand to plant some of American fast-growing species as Douglas fir, Monterey pine etc.

## I.1.4.6.3 Reforestation techniques

Increase of the forest area through reforestation techniques is a practice that enables a better adaptation to climate change and rises of the sea level and enables species to absorb CO<sub>2</sub> emissions especially on the eroded lands, refused agriculture lands and burned lands (about a area of 10000 ha).

A lot of reforestation projects are implemented especially on the eroded lands and refused agriculture lands, and also on burned forest areas.

Too many man-made forests are set up through planting of Mediterranean pines (*Aleppo pine-Pinus halepensis* Mill, *Seaside pine-Pinus pinaster* and *Stone pine-Pinus pinea* L.) on the limestone geological formations and on sandy turns along the coast and black pine (*Pinus nigra* Arn.) on the serpentine geological formations, as well as poplars along the rivers on sandy terns. There were also planted some other broadleaf species as walnut (*Juglans regia* L.), chestnut (*Castanea sativa* L.), Sweetball (*Laurus nobilis* L.) etc. and fast growing forest tree species as: Black-locust (*Robinia pseudoacacia* L.), and a tiny area with Monterey pine (*Pinus radiata* D.Don.), etc.

Even though the planting technology is known, the field experimentation is a useful tool to response in due time to the climate impact. Nonetheless, reforestation projects that foresee operations for rehabilitation of the burned forest area need to be prepared and applied.

There are the well-known traditional practices to cultivate the necessary seedlings for the establishment of man-made forests but requires the import of new seedling cultivation technologies, which are more effective from the economic viewpoint.

## **I.1.4.7 Tourism, population**

In the course of last years much is spoken for the climate change and its influence on the natural environment and socio-economic activities in Albania. Despite of that, no direct response measures for adaptation of population, settlements and tourism activities are implemented so far. However, some of the actions taken during the second half of the last century to the littoral site for other purposes have indirectly influenced and will continue to influence positively for the adaptation to the climate change.

### **I.1.4.7.1 Physical planning**

During the former times (until 1990) the construction of all buildings (residences, economic objects and tourist infrastructure) has been made under a planning process. The majority of buildings were constructed over high tracks; therefore they will be not threatened by the future sea level rise. After 1990, along the coast and often very close to the coastal line were built up over 2400 illegal buildings, mainly used for tourism purposes, which have damaged the beaches, have polluted the environment and are threatened because of the expected increase of the sea level.

Both legal and illegal construction does not only reduce the agricultural and forest land, but also create hips of waste, pollutes the environment and degrade the landscape. Spontaneity in construction has resulted in chaos, especially in the suburbs of urban centers and beaches.

### **I.1.4.7.2 Drainage technique**

There is some experience in Albania regarding the drainage of the soils even when they are situated under the sea level. Until 1990 the drainage systems have well functioned. Some of them had a mechanical pumping system for water discharge into the sea. After 1990 many technical problems were generated. Investments are needed to recover.

### **I.1.4.7.3 Coastal erosion prevention**

Damage of the natural and cultivated vegetation along the littoral sites and the utilization of the sand dunes and beaches have favored coastal erosion.

During 1945- 1990 the deforestation of the littoral land is made by the state for the purpose of opening new lands while after 1990 individuals cut hectares of forestland for private reasons. In both cases the damage is not only the decrease of the forest area, but it has also favored the coast erosion and the advance of the sea toward the land. As a result, many sand dunes damaged in the beaches of Velipoja, Vilun, Kune - Vain, Patok, Seman, Narte etc. In the last 150 years, in some areas such as Patok, Seman, etc, the sea has advanced 2.5-3 km toward the land. Moreover, the illegal utilization of the beach sand has favored the advance of the sea toward the land. A typical example for the implication of such bad practices is the destruction of Seman beach.

Change of the river outfall was another practice of negative impact to the adaptation to climate change. The most negative consequence of this practice is the case of Ishmi River outfall change. Aiming at filling the Patok lagoon in order to provide agricultural land, during 1970, the Ishmi River was channeled to discharge into the lagoon and as a consequence, its deposits were accumulated there. This measure favored the sea erosion increase, which for 20 years managed to destroy totally the Patok beach causing a big economic and environmental damage (the entire tourist infrastructure is destroyed). Similar negative consequences have had the Butrint littoral by the change of the Bistrica and Kalase rivers' outfall.

Construction of the Hydropower dykes has especially influenced on stony discharges decrease in Drini and Mat Rivers (a significant amount of them are accumulated in the lakes of HPPs) and therefore preventing the advance of rhythm of the river deltas toward the sea and to the creation of the littoral arrows and cordons.

The utilization of the inert in the riverbeds, during the last decade has also a negative consequence to the erosion. A significant amount of the stony deposits do not get to the sea, but they are accumulated into the holes created along their bed. Therefore, the equilibrium accumulation in the river deltas is damaged, causing erosion.

After some recent flooding, the Government has taken some response measures to the erosion prevention such as stopping the gravel utilization from riverbeds and cutting of forest trees along the coast area.

### **I.1.4.8 Health**

The community living in coastal areas is, in general, suffering by deficiencies in environmental infrastructure, mainly in running water supply, in wastewater discharge and its treatment. At present, sewage of urban areas discharges into surface waters (rivers) or directly into the sea and without any treatment before discharge.

The drinking water supply is provided at retailed and at limited hours to the population of the coastal area. The existing technology does not guarantee the quality of running water. This situation often brings about problems and consequences for the public health. There are observed cases of infectious diseases, such as hepatitis viral B etc., caused by utilization of polluted water in coastal urban areas.

Intensive precipitation of fall 2002 and winter 2003 followed by flooding of north coastal areas (Kurbin, Lezha and Shkodra areas), caused outbreaks of Hepatitis viral A and Dysenteries in population of these areas, mainly due to the bad infrastructure of water supply.

The area between Lushnja and Vlora is considered as a malaria area up to the end of 60s. Through a National Action Plan of 1957 (425 new cases of malaria

were registered that year) and a multilateral intervention, malaria disappeared (by using DDT and other infrastructure and health interventions). After 1962, the first case of malaria was observed carried from abroad and up to 2002 the cases number accounted for 38. They are mainly imported by Asia (China -- 23 cases), Africa (Kenya, Tanzania -14 cases) and South America (1 case).

## **I.2 Identify criteria for assessment**

As highlighted in the introduction section of this report, the assessment criteria used for adaptation technology needs are the same as for abatement technologies:

- Contribution to the achievement of most of the MDGs;
- Social acceptability and suitability for Albania's conditions;
- Market potential;
- Contribution to climate change mitigation/adaptation.

The same sub-criteria already used for needs assessment of abatement technologies are used for adaptation technology assessment as well. As indicated in the introduction of this report an equal weight and scoring is used for assessment of adaptation technologies. A qualitative assessment is performed for each relevant category/section. For more details on evaluation matrixes please refer to Annex I (tables #6, 7 8...10).

## **I.3. Selection of key technologies**

A few adaptation technologies already proposed under Albania's FNC and somewhere used in Albania are identified, taking into account that they are expected not only to reduce the vulnerabilities from impacts of climate change but also to reduce current damages (vulnerabilities) related to climate variability or extreme weather events. In addition, some technologies already used in other countries with climate analogies as well as similarities in coastal features and socio- economic developments (for a considerable period of time) are also considered.

Adaptation technologies are best implemented as part of a broader, integrated coastal management framework that recognizes immediate and long-term sector needs. Other countries experience have shown that win-win situations could be established when coastal adaptation technologies also provide benefits unrelated to climate change.

The team has collected information on alternative adaptation technologies and related market (wherever possible) information for those sectors. This information is collected from existing studies and development plans for the related sectors or from literature and the Internet. The set of adaptation technologies consists in a summary of alternative climate change response technologies for each sector that could easily meet local needs and circumstances. These technologies are divided into three categories:



- *Data gathering technologies*, which enhance understanding of the basic geo-morphological characteristics of the coast as well as its dynamic processes including: data (gauges, sensors, remote sensing and monitoring), management and decision technologies (GIS, models, databases);
- *Coastal protection technologies*, which are incorporated within, or required to carry out, the implementation of the three main coastal adaptation options: managed retreat (e.g. movable structures, inland flood defenses, flood warning systems), accommodation (e.g. dune management, waste-water treatment, etc.) or protection (e.g. beach nourishment, sea walls, etc.);
- *Other sector-related technologies*.

After the evaluation, the selection process or prioritization has taken place for each sector under analysis. More information on selection process is provided through a summary table of priority adaptation technologies. For more information refer to Annex I, Table 11.

A detailed analysis of the selected priority adaptation technologies is provided below.

## **I.3.1 Data gathering technologies**

### **I.3.1.1 Establishment of a network of automatic meteorological stations**

The automatic meteorological station is relatively a new way of measurement and transmission of meteorological data. Data gathering of meteorological elements through automatic stations can provide information in real time, which is very useful for the prediction of floods and inundation of agriculture land. The elements monitored through these stations are: atmospheric pressure, air temperature, relative humidity, sunshine radiation, atmospheric precipitations, the wind direction and speed. On the other hand, interface equipment will be attached in the automatic station in order to get the possibility to connect with the central computer. In this way, a network for monitoring the meteorological elements and getting the information to the central station in real time is planned to be implemented.

The number of these automatic stations and distribution over the country depends on some factors. The most important one is the meteorological representation of the places where the station will be set up as well as the cost. This information will be used more effectively in the weather and hydrological forecast, especially in floods prediction, etc

The establishment of automatic stations network within the National Meteorological Network is the best but very expensive alternative. In case of lacking the appropriate funds, another alternative may be used: the upgrading of existing network by substitution of following equipments with high quality recorders, such as wind recorders, pluviograph, pyranograph.

*Wind recorders* measure various proprieties of wind (e.g. strength, direction). Once installed, wind records require basic maintenance and data handling skills.

*Pluviograph* registers continuously the rainfall. The intensity of precipitation calculated from the diagram of pluviograph is a very important index for calculation of land erosion. Also, it is used to perform predicting models of the floods and inundation of agriculture land.

*Pyranograph* registers continuously the total energy coming from the sun. These data serve to evaluate the possible sunshine radiation energy as clean energy source.

The establishment of an automatic station with all the elements mentioned above costs around 20,000 USD. Maintenance costs account for about 500 USD per year.

### **I.3.1.2 Establishment of a network of automatic hydrological stations**

The automatic network requires advanced technology, which are accessible thanks to the progress in electronics and data processing. Furthermore, they ensure greater reliability while being easier to use. They can be installed in uninhabited areas such as forests and pastures as well. Automatic stations are indispensable for purposes requiring real time data collection. These new methodologies make it possible to improve the organization of networks from several standpoints: follow-up of the proper functioning of remote stations, limited data handling and easier access to information. The information gathered in real time is used to better face the flooding problems.

Flood warning given several days in advance can make it possible to reduce the economic cost of floods. In the basin where the concentration time is a few hours, human life may be endangered by a sudden rise in the water level. In this case organizing rapid flood warnings becomes vital. Hydrological and meteorological measurement automatic network makes it possible to reach all these objectives.

Designed for different purposes, they have similar structures made up of standard components such as (i) Measurement station; (ii) Data transmission; (iii) Data collection and processing center.

Measurement station is the chiefly handles water – level measurement. These sensors are connected to a data collection unit, which takes care of encoding, storing, and transmitting messages. On site data storage ensures considerable autonomy for stations to which access is limited.

Data transmission techniques are selected according to the performance, reliability, and speed desired. Satellite links are reliable and independent ways for transmitting data, allowing data collection in convenient delays for operational application.

Data collection and processing center aims at carrying out the periodically interrogation of stations, monitoring, data filing, and display. It uses data in order to simulate phenomena in advance. It has hardware aspects with its equipment for computing and storing data. It has also software aspects with the creation of real time modeling programs. This aspect determines the reliability of the forecast.

The measurement devices that are the basis of every operational system gather data, which after coding are transmitted in real time or stored on the site.

Nowadays, the condition for installing these new types of gauges is less constrained than those for conventional float gauges.

At present, the technology for these sensors is evolving and new instruments have recently been developed. Taking into consideration the conditions of our country a perfect automatic station is one equipped with ARGOS system. This system is easier to install, to maintain, and to assist. They can be installed in locations where is difficult to be reached by people, as mostly of our hydrometric stations are. And last but not the least is their relatively low cost.

Various countries and specialized organizations can provide this technology. The Hydrological Department in the Institute of Hydrometeorology has a good experience in the collaboration with ELTA (France) and OTT (Germany) etc. The project for an automatic network in our country includes at least two automatic stations in each river one upstream and the other downstream.

### I.3.1.3 Monitoring of sea and shoreline

Shoreline and sea monitoring involves the collection of various kinds of quantitative and qualitative data.

- *Tide gages.* The ability to detect changes in relative sea level is an extremely important aspect of adoption. Tide gages measure water levels relative to land. Requires very long-term commitment to maintain system of gages and analyze data;
- *Wave gages.* Wave gages are used to measure various characteristics of water as: height, period, length, direction. Network of wave monitoring stations require sophisticated maintenance and data handling skill;
- *Current Meters.* Current Meters are used to measure current velocity and direction as well as to map sea surface topography;
- *Saline-meters.* Saline-meters are instruments to determine the degree of salt water intrusion in coastal areas;
- *Echo-Sounders (E.S.) and continuous seismic profilers (CSP).* They are used in bathymetric surveys to obtain information about the topography of the ocean bottom;
- *Modeling of wave processes.* Wave generation and wave transformation processes can themselves be modeled. High quality data input and training is necessary, while the results can be of limited accuracy.

All above-mentioned data can be collected and further processed using some of the technologies listed below:

- *Water Level Recorder*

The Water Level Recorder **WLR7** is specially designed to measure sea water levels. Mounted on the seabed, this instrument records pressure, temperature and salinity at regular intervals. On the basis of these data, precise variations in water level can then be calculated. This instrument is extensively used for monitoring seabed depression. Data collected by the **WLR7** is stored in the Data Storage Unit (DSU) 2990 which also records the time of the first measurement and subsequently the time of every first measurement after midnight. The data is simultaneously transmitted acoustically into the sea by switching on and off a 16384 KHz carrier. These acoustic signals can be monitored at the surface by the use of Aanderaa's Hydrophone Receiver 3079.

- *Wave and Tide Recorder*

The **WTR9** is a rugged, self-contained instrument designed for mounting on the seabed a fixed structure for measurement of waves, water level and temperature in shallow waters. The recommended deployment depth is 15 meters (maximum is 60 meters). A quartz pressure transducer measures waves and tides and the temperature is measured by a Fenwall thermistor. The **WTR9** has selectable sampling intervals and the data are stored in Aanderaa's DSU 2990E storage unit. Real-time data can be brought ashore via cable and connected to a PC computer via Aanderaa's Deck Unit 3127 or Computing Unit 3015.

- *Doppler Current Meter*

The development of small, low power Doppler current sensors in recent years have opened up many interesting applications; one of these is the **RCM9**, a unique new self-contained instrument that can be moored in the sea for long periods of time. It measures the horizontal current speed and direction, temperature, conductivity and turbidity of the water as well as instrument depth.

In addition, the **RCM9** has a free channel for an optional sensor that can be supplied from the manufacturer or be built by the user. The recording intervals can be set from 1 to 120 minutes in eight steps, or can be set to operate continuously. At the 60 minute recording interval the instrument can operate for more than two years.

- *Conductivity / Temperature Profile Recorder*

Information on vertical temperature profiles in the sea is of interest for numerous reasons. For some of these applications, in situ recording of data is satisfactory, for others, telemetry of data ashore or to ships is required. The **TR7** is suited for both applications. The **TR7** Temperature Profile Recorder is a rugged, versatile, high-precision instrument consisting of a 12 channel recording unit and a thermistor string. Four different temperature ranges are available.

The **TR7**'s Recording Unit contains all necessary functions and electronics to scan and store the temperature values at preset, quartz clock controlled, and intervals.

The cost for this equipment is relatively high. They can vary from 10,000-20,000 USD each.

### **I.3.1.4 Modernization of hydraulic laboratories**

Hydraulic laboratories are important for testing the engineering properties of structures in particular hydrodynamic conditions and can support various kinds of modeling activities: experimental; numerical; dynamical. Laboratories represent essential institutional capacity to assist in coastal adoption. However, they are expensive to maintain.

All these data gathering technologies will help for data collection and creation of a data bank for various natural phenomena. The use of these data is very necessary in predicting the defending tools for coastal zone, especially for beaches, tourist infrastructure, housings and other material goods.

### **I.3.1.5 Satellite remote sensing**

Remote sensing technology refers to the techniques and methods used to acquire and process information about an observed and studied object, without getting physically in touch with it.

The space remote-sensing technology for the environmental observation and study utilizes orbiting satellite platforms, equipped with "sensors" devoted to acquire information about observed objects (targets) referred to land, atmosphere and sea.

From synoptic point of view no other technique can obtain such comparable results, for instance, the airborne photo-grammetry that due to its different characteristics requires a number of time-differed passages to cover such extending areas.

The analyses of remote sensed data allows, for instance, the identification and classification of significant environmental parameters such as water surface temperature, sea and land surface color, sea and land roughness etc.

Remote sensing data are successfully used both as a direct source of information (i.e. for the individuation of the characteristics of the target) and as geographical referent system where conventional data from the other sources.

This allows to evidence changes in environmental conditions, to plan -when-ever necessary - with more accuracy, further ground investigations and a consequent considerable saving of time and costs in the carrying-out of them.

According to these potentialities, the satellite remote-sensing is usefully applied to the study, and to control many environmental phenomena, as well as to



support several planning and control activities.

As far as meteorology and climatology are concerned, remote sensing data have helped spawn a revolution and enabled a better understanding and knowledge of the climate dynamics and its evolution. For instance, remote sensing allows high frequency control of cloud patterns, assessment of temperature and moisture profiles, precipitation estimation, wind determination over the ocean and in atmosphere, etc.



Source: ALBANIA CAMP

**Figure 1.5** Changes occurred in the southern zone of Shkumbini delta between 1937 and 1992.

In all above fields, the support of remote sensing proves really successful, and great scientific efforts are growingly improving the space remote sensing technology, thus contributing to the effective understanding of environmental conditions and changes

### I.3.1.6 Geographical Information System (GIS)

GIS enhances understanding of the basic geomorphologic characteristics as well as its dynamic processes.

GIS combines computer mapping and visualization techniques with spatial databases and statistical, modeling and analytical tools. It offers powerful methods to collect, manage, retrieve, integrate, manipulate, combine, visualize and analyze spatial data. It derives information from these data that help to assess the expected vulnerabilities of climate changes. There is no doubt that GIS offers a great potential for society wishing to anticipate and understand the consequences of climate changes to cope with the potential impacts.

First-order application of GIS in coastal adaptation would be overlaying scenarios of sea level rise with elevation and coastal development data to define impact zones. More sophisticated application may include morphological dynamic modeling. GIS technology is evolving rapidly and is increasingly used for sophisticated modeling. GIS can provide excellent support to coastal managers for making decisions about adaptation.

Collected data can be stored in a GIS, combined to developed new insights and information, and visualized for interpretation. GIS can assist planners to identify appropriate adoption technologies as well as their optimal location for implementation.

Institute of Geographical Studies and Geographical Institute of Military are applying GIS technology in our country. Some efforts to implement this technology are in process now, but there are some constraints, which delay it such as the high cost of computer hardware and software, lack of appropriate digitalized data, lack of collaboration between national research institutions.



## I.3.2 Coastal protection technologies

The coastal zone is not static, but a dynamic, unpredictable, adaptive and interdependent set of subsystems. While this idea is well internalized within the coastal zone engineering and management community, these characteristics are frequently ignored in the planning, design and implementation of coastal projects. Identifying specific technologies needed to respond to the sealevel rise is therefore a complex task.

The dynamism of the coastal zone is both a problem and an opportunity for coastal managers. On the one hand, it can be difficult to model and predict the effectiveness of a particular coastal adaptation technology, or indeed the positive or negative side effects associated with the technology. Moreover, most existing coastal zone problems are the result of a cumulative set of maladaptive practices (e.g. development in hazardous zones, the use of inappropriate coastal adaptation technologies, etc.)

The team has recommended the following protection technologies as well as the adaptation options they could support.

### I.3.2.1 Coastal defense structures

Considering climate similarities and marine common features (tide magnitudes, waves height) as well as coastal features and social- economic developments (for a considerable period of time), the team of experts came into the conclusion that technological approaches related to impeding the sea advancement applied into the Mediterranean area (Greece) and in the Black sea area (Georgia), could be considered for application in Albania as well.

- *Construction of a series of dams parallel and perpendicular to the coastal line as well as the intensive refilling of the beaches through a temporary bypassing.*

This technology can be used for the protection of the low type sandy coasts of Shengjin, Durres and Vlora beaches. It constitutes the most ambitious project implemented so far in Greece (Pierias coast) for the protection of the low type sandy coasts, with a very small inclination and with sectors below the sea level affected by waves of an average height of 2.5 m (in the southeastern part). The littoral transport of the sediments oriented to the north has been disturbed by the construction of portal works along the coast. Solid carryovers of the water effluences were diminished also from the non-regulated collection of solid matter from the riverbeds. Within a short period of time the beautiful sandy beaches vanished and were substituted in turn by sandy and granular beaches. The coastal protection study initiated on 1988 and included the 10 erosion most affected sectors. The coastal line has been stabilized and beaches have been recovered and used for tourism purposes. The results were moderate, since the sea is very shallow and the oceanographic conditions are suitable. The cost is estimated at 590 USD per linear meter of protected coast in stone build dams and about

1,200 USD/m in concrete build dams (reference prices 1991).

- *Construction of dams parallel to the coast. This technology can be used in the beaches of Currila, district of Durrës.*

The project deals with the protection of the elevated rocky coast of the Aegean Sea (the northeastern coast of the Skyros Island). The coast has been affected by the natural erosion associated with prolonged perishes. The coast has been exposed to strong waves from the northeastern sector, with a maximal height of 4 m. According to the estimation made during the twentieth century, the coastal line has retreated 40-50 m with an annual average of 40-50 cm.

The natural retreat has been additionally deteriorated by man-made activities. To build their houses on the verge of the frail coast the inhabitants have build up gigantic concrete walls. During the stormy weather, the waves struck the walls and collect the reduced amount of sand still present on the beach. The sector protection by a system composed of three separate dams has proven effective. Dams have functioned appropriately (1990) and as consequence sand has been deposited in a band with a width of 40 m at the place where the sandy beach disappeared many years ago. The cost is evaluated about 1,300 USD for linear meter of protected coast.

- *Construction of a system of dams parallel and perpendicular to the coastal line above and under the sea level and the refilling of the beach with sand retrieved from the sea.*

This technology can be used in the small beaches of the Riviera. The project aims at restoring and regulating the Ixia coast in Rhodes- one of the best balnear and tourist centers of the island with a sheltering capacity of 10000 beds situated within 2 km coastal length. The owners of the hotels are very much interested at rendering the beach attractive to stimulate the balnear activities.

The project aimed at two principal objectives: obtain a wide sandy beach replacing the existing granular one and ensure a more stable coastal band than before. The protection works aimed also at scattering the energy of waves (up to 3 m of height) in order to protect the beach and ensuring a safer balnear zone.

The optimization of the master plan and the calculation of the efficiency for the envisaged works have been based on a detailed study design on the sedimentary reduction model. The study has also rendered possible the setting up of a cheaper configuration involving both initial and maintenance inputs. Very good results have been achieved. The length of the beach has increased at about 20% whereas its surface triplicates from 35000 up to 120000 m<sup>3</sup>. The physical-sedimentary model proved to be an indispensable tool for big scale corrective studies. It should be considered a valuable mean for optimizing the protection systems both from the technical and economical viewpoints.

The cost of about 2,800 USD for linear meter of protected coast is considerably higher compared to the previously described projects.

- *Supplying the sea with the sediment amounts* needed for the creation of beaches in places where they used to be. This technology can be used in the beaches of Patok and Seman.

Since a long time, the area lying between Sotchi and Batoumi (Black-Sea, Georgia) has been affected by the sea erosion. Starting from the '80s, Georgia lost almost 1400 acres along the 220 km of coastal line. To restore the coastal line the Georgian team choosed the method of the positive balance accumulation-erosion. The work performed was rigorously scientific. The utilized materials were similar to the materials transported by the local water effluences. The collection of materials was done at the rivers deltas before reaching the coastal sea canyons. Exact calculations were performed to estimate the necessary mass needed for refilling and for ensuring the beach appropriate inclination to protect from the sea erosion.

The monthly control of the beaches enables the evaluation of the expected results, undertake corrections, discover errors and provide the necessary assistance to preserve the obtained balance.

This method requires the compensation of the effects of the sea abrasion with carryovers of new material along the coast. However, these balancing refills are moderate compared to the initial restoring process. The recreation of the beach requires on average the depositing of 2000.000 m<sup>3</sup> of material (sand, granules) for each km, whereas for preserving the situation created in filled (recreated beaches) in north Batoum an annual fortification of about 150000 m<sup>3</sup> for 50 km coast is required.

The obtained results are visible. The coastal line between Sotchi and Batoumi has been restored almost to its initial status. Since 1981 almost 50 km of beach has been recreated. The profiles of the newly created beaches are identical to the natural beaches. Therefore a highly qualitative tourist potential has been setup although not much exploited so far. The implemented procedures in Georgia's coasts affected by tides with amplitude of 30-40 cm can be successfully implemented elsewhere for bigger tidal amplitudes as well.

- *Building with "nature" techniques.*

Building with "nature" techniques can include the creation, maintenance or restoration of wetlands, marshlands and dune systems. In cases where re-vegetation is required to simulate natural forms of dune or back-shore protection, this may involve the use of horticultural or arboricultural technologies to produce large numbers of seedlings or young plants needed to newly green large areas. Re-vegetation does not disrupt costal processes. Indigenous "pioneer" species for dune stabilization are particularly effective as a "bridging technique" so that natural vegetation can be restored. It's important to choose the right vegetation, planting and fertilization for local condition.

These natural technologies may only accelerate existing morphological trends but not change them. Such approaches may only work well for small wave climates and in particular seasons. They have a relatively low cost.

- *Protection of sandy dunes and dune management.*

Sandy dunes are excellent natural barriers for settlements and the entire tourist infrastructure. In our beaches they are at risk principally due to the collection of sand for construction purposes.

The active management of dunes can contribute to the reduction of human-caused stresses and wind damage on the coastal zone and allow dunes to retreat landward. Potential drawbacks include reduced access and amenity and eventual land loss on the inland side of dunes.

- *Protective constructions in ports and inhabited areas.*

Constructing parallel dams perpendicular to the coastal line, traps and walls aiming at reducing and scattering the energy of waves. The specialists, faced with the need of preserving the sand banks near to the works, were focused in improving the construction technology of the protective works. The proposed solution was the modification of the wall architecture abiding it to the environment, the form of waves and reducing their destructive impacts. Later, cheaper concrete blocks were situated along the banks struck by the waves to reduce their destructive potential

- *Beaches refilling.*

The Americans have revolutionized the protective system in the sixties, when US Army Engineers corps inserted the “beach renourishment” system, exerting a big influence in other countries as well. Hundred of American beaches have been systematically refilled.

- *Constructing and reconstructing the street and railway network.*

The road and railway network along the coastal line should be build up on high levels to cope with the envisaged increase of the sea level. The system should also serve the evacuation needs for people of the area in cases of need following sea storms.

Coastal and flooding defenses are structures, which essentially create a new strip that is vulnerable to more frequent flooding. The area behind the defense is less vulnerable. This is a potentially cheaper option than other protection technologies; though it involves the adoption of land use near the river. Such structures can be the following:

- *Gabions* that are low-cost wire or plastic baskets filled with local materials. The baskets vary in size from half to one cubic meter. Baskets are placed together as building blocks to form structures or buried revetments to act

as a line of defense in high waters. The great advantage of gabions is that they can be constructed with a minimum of equipment. They are also portable and can be removed if not effective. However, they deteriorate rapidly. Some supervision may be required to fill with suitable size and shape rocks;

- *Hand-placed rock* walls are local rocks combined with other materials. Placed correctly and maintained hand-placed rocks walls have been demonstrated as an effective technology. Human-built structures can be surprisingly better than machine ones, as humans are good at packing and placing rocks. These walls are relatively simple to put in place but still need some skill. However, they have limited capacity to withstand inundations;
- *Breakwaters* are double – sided structures with water on both sides used to dissipate waters and current energy. They can be constructed perpendicular or parallel to the river or seashore. Breakwaters are generally expensive, sophisticated structures;
- *Coastal protection units (concrete units)* are an important technology of coastal structures. Concrete units are precast high-strength concrete structures. They are available in many different shapes and sizes;
- *Groynes* are structures placed perpendicularly to the shore to trap sediments. They re-distribute currents along the coast. Groynes are constructed using wood, local materials, concrete or steel;
- *Revetment* is a medium to high-cost structure, which provides protection to banks or cliffs of erosive material.

### I.3.3 Other sector technologies

#### I.3.3.1 Agriculture

Most available adaptation options take advantage of the general flexibility of the agricultural systems. However, in Albania the margins of flexibility are often constrained by soil quality, water availability and a complex set of economic, technological and institutional barriers. Therefore the autonomous adjustment performed by farmers does not have the appropriate access to the right information and tools. Hence, it is recommended to upgrade the following adaptation technologies, aimed at reducing runoff, improving water uptake through changes of land topography:

- *Land leveling.*

Land leveling might be described as a technology aiming at improving water management, which in turn improves weed suppression and control, crop establishment, nutrient use efficiency, crop uniformity and maturation, drainage, yields, and profits.

The benefit of land leveling is greater with more uneven land but cost increases with the amount of soil to move.

Land leveling has been practiced by the new settlers for the reduction of runoff and improvement of water uptake in soil surfaces less than 1 ha (average 0.5 ha), however, in countries like USA, Australia fields may be leveled up to 4 ha or more. This surface was barely able to cover the survival needs of a farmer's family.

- *Bench terracing and fields subdivisions.*

Bench terracing is a technology involving the construction of a series of platforms along contours that are cut into hill slope in a step-like formation. These platforms are separated at regular intervals by vertical drops or by steep sides and protected by vegetation and sometimes by packed stones retaining walls. Terrace spacing is generally known as the vertical interval between two terraces. The vertical interval is dependent on the depth of the cut and since the cut and the fill are to be balanced, it is equal to double the depth of the cut. Normally, the alignment of the bench terraces starts from the ridge and progresses towards the valley. This kind of approach involved soil surfaces bigger than 1 ha and involved several farmers' families with parental ties.

- *Roughening of the land surface.*

Surface roughening or scarification is a technology used for creating unevenness on bare soil to prevent slope erosion and the formation of rills. The primary functions of surface roughening are to reduce erosion potential by decreasing runoff speed, trap sediments, increase filtration of water into the soil and help the establishment of vegetative cover.

Although not to same the extent of the previous measures, this option has been adopted by some farmers, families settled in ridges nearby a stream.

This set of adaptation measures was mostly spontaneous and lacked a genuine technology approach.

Another major objective, prone to adaptation measures by the Albanian farmers was the conservation of soil moisture and nutrients and reduction of runoff control erosion. To render surfaces productive, farmers need to widen the application of the following adaptation measures:

- *Application of minimum tillage.*

Minimum tillage as a technology approach can be defined in many different ways. It encompasses reduced tillage, no tillage and zero tillage. There is no single right method. Minimum tillage aims to retain crop residues and establish crops with the least realistic amount of soil disturbance while still maintaining crop yield.



Minimum tillage requires that each and every process or action, from harvest to harvest, is carefully assessed. It must be thought as a whole package, with practices adapted to the situation. Minimum tillage is not just “non- plugging”.

This rather inexpensive but time consuming adaptation approach has been used in many farming practices especially by the new settlers.

- *Application of contour cropping to slope.*

This kind of practice consists in planting of alternate strips of different crops in the same field. The mostly used type of strip cropping in Albania is the contour strip cropping in the vicinity of slopes. However, other techniques of field cropping are available such as the field strip cropping and buffer strip cropping.

Farmers making use of agriculture land bordering a slope prone to erosion have principally applied this adaptation measure. Mainly crops with a highly developed root system have been selected for the purpose.

- *Use of lower planting densities.*

Another adaptation measure used mainly to conserve soil moisture and nutrients.

The persistence of drought in the coastal areas and the average increase of temperature have exerted a considerable moisture stress in cropping practices in the coastal areas. This has urged farmers to change farming timing to better fit the new climatic conditions.

This has been mostly achieved through:

- *Advancing the sowing dates to offset moisture stress during warm period.*

To face the challenge many farmers have incurred into some adaptation measures aiming at improving the water use and availability and controlling erosion.

Some of the already adopted technologies consist in:

- *Use of low cost pumps in water supplies.*

This approach has been strongly supported by the counties water use associations, introduced and promoted through workshops organized with farmers.

- *In some areas the drip irrigation system has been adopted.*

The drip irrigation system consists in a network of pipes and tubes, which form a delivery system to feed exact amount of water and agro-inputs to each plant directly to its root zone, drop by drop.

Water is applied at low pressure and frequent intervals over a period of time as per plant requirement. This ensures the optimization of product without subjecting the plant to stress or strain.

The introduction of this low cost new technology approach appears to have been well accepted by some farming practices.

- *Digging of line canals or installing low cost pipes.*

Digging of line canals has been extensively applied for irrigation purposes in farming practices of the coastal region. In some areas, installing of low cost pipes has been considered as well.

### **I.3.3.2 Livestock**

Animal husbandry adaptation practices consist mainly at some measures aiming at keeping the farmhouse microclimate inside the range of thermal neutrality. The set of measures consist in:

- Use of thermal insulating constructing materials;
- Some big poultry breeders have invested in improving the ventilation devices of their premises and inserted in some cases air conditioning facilities.

As far as early identification of the disease in animals and the control of its widespread is concerned:

- Implementation of a rapid serological test for the identification of the disease;
- Stamping out of the infected animals.

### **I.3.3.3 Fishery**

As there is a growing concern expressed by the mollusks breeders in terms of ensuring the safety of their products for human consumption, the adaptation technologies proposed that need to be extensively adopted are:

- *Setting up of warning systems in the harvesting areas to alert the onset of abnormal phytoplankton blooms.*

The system involves a database integrating data flows from the 8 coastal districts of Albania dealing with fishing and bivalve mollusks harvesting areas. The system promptly uploads and downloads data from a specifically developed web site.

- *Implementation of fast screening tests for the detection of bio-toxins in shellfish species.*

This kind of technology approach involves the use of fast screening tests for the

prompt bio-toxin detection and in particular the mouse bioassay-screening test and the lateral flow immune chromatography test. Both techniques are low cost techniques and easily transferable and applicable.

## I. 3.3.4 Forestry

- *Revision of the forest and pastures development strategy.*

This measure aims at reviewing the forest and pastures development strategy based in the principle of sustainable development and to consider the climate change implications and carbon balance.

It also aims at funding different studies and research projects such as:

- *Identification of the climate change impacts for 27 forest unit of 10 coastal districts.*

The project estimated cost is about 3,025,000 USD. The aim of this project is to know the impacts of climate change and to propose adaptation actions for each forest unit management.

- *Study of genetically variation among forest tree species and inside species.*

The project estimated cost is about 90,000 USD. The aim of the project is to know the genetically variation in relationship with actual climate conditions. It is expected to find out and to recommend the best forest species and provenances for adaptation to climate change.

- *Forest tree provenance and progeny tests in different conditions of climate.*

The estimated project cost is about 120,000 USD. It aims at the experimentation of different forest tree provenance and progenies. It is expected to see the results of adaptation in different climate conditions.

- *The experimentation of fast-growing species to better adapt to new conditions and much capable to sink more CO<sub>2</sub> emissions.*

The estimated project cost is about 120,000 USD. The project aims to find and to recommend the best fast-growing forest species for cultivation to sink more CO<sub>2</sub> gas through the experimentation of fast-growing species.

- *The experimentation on rehabilitation of burned forest area.*

The estimated project cost is about 90,000 USD. The aim of the project is to find the best method for rehabilitating the burned forest areas. This is expected to be achieved through experimentation of forest tree by sampling planting and pasture grasses seeds with different methods of land preparation.

- *The study and experimentation on better cultivation systems to adapt the forest to climate changes.*

The estimated project cost is about 140,000 USD. The project aims to find the best cutting systems to favor the adapted species to climate change, to occupy the turns with expected conditions and to find the best agro-forestry systems in different climate conditions.

### I. 3.3.5 Health

Polluted water is unsuitable for drinking or other uses. This effect is similar to reducing water supply. In addition, reduced runoff from climate change will most likely increase concentrations of pollutants in the water column. Reducing water pollution effectively increases the supply of water.

Climate changes can lead to the growth and proliferation of many disease-causing vectors, like malaria, hemorrhagic fever, etc. which have as a factor the evolution of insects and other hosts of these diseases. These disturbances can especially grow in coastal zones and mainly in swamps.

The lack of adequate infrastructure in coastal zones can cause environmental, earth and water pollution, causing the increase of rodents, pollution of water from bacteria, and different viruses.

Climatic changes can even lead to predicted changes in food safety, mainly in agricultural products of coastal zones also as a result of the decrease of drinking water in the preparation of this food, which may be accompanied by health damages and various bacterial diseases, like gastro-enteritis, enterovirosis etc.

Predicted climatic changes require the intervention and the taking of some prior precautions to prevent the appearance of health damages and illnesses in different populations through:

- *Building a health information system (alert information system).*

It will make possible the right evaluation of the appearance of vector diseases (malaria, hemorrhagic fever, etc.) and the specification of accurate intervention to diminish and erase them.

The existing alert information system cannot carry out the goal because the connection is not totally electronic. This will require the installation of an electronic information system (starting from the health center – epidemiological regional service to the contagious disease central service. Now this system functions partially through the electronic information system and its upgrading all over the country according to the careful studied structure required.

The cost for the establishment of an electronic information alert system accounts for approximately 1.5 million USD, (training of the personnel and the correct functioning of the network inclusive). This cannot be achieved counting

only on the state's budget.

- *The improvement of community health infrastructure would make possible a better access of the population to health service.*

The establishment of over 80 health centers fulfills the structure of the existent sanitary map, giving the population access to health service in the center of the community; at the same time evaluating in continuity the migration of population and the restoration of health service by addition of new health centers. The infrastructural upgrading and provision will improve the quality of health service and as a result the fast evaluation and enhancement of the population health condition.

The construction of health centers needs a budget of approximately 400,000 USD. The study of the sanitary map as a result of the migration of population would require an amount of about 300,000 USD.

- *The establishment and the operation of the water quality monitoring system and its improvement in the bacteria and viruses containment control.*

By the improvement of the water monitoring schemes and the provision of apparatuses the quality of the monitoring will be enhanced, and at the same time, it will make possible the specification and evaluation of those parameters that actually are not applied. The placement of an analytical monitoring technology with electronic apparatuses will increase the guarantee of the consumers and decrease the influences to their health.

To evaluate the monitoring scheme of drinking water quality and the master plan for the public health laboratories an amount of approximately 2.5 million USD is required. It cannot be completely provided by the state's budget and funding from donors is needed.

The establishment of the evaluation structures for various disease causing vectors because of the climatic changes, such as mosquitoes, rodents etc. are required.

The application of control and permanent monitoring schemes of the disease-causing vectors will be carried out by a trained staff and with the appropriate apparatuses in every region. Their supply with adequate technology, which currently doesn't exist, as well as with disinfecting material, will bring the decrease of damages in the population's health. To achieve this system the training of a team of 8-10 members and the specification of a monitoring scheme all over the country is required; and for the creation of an elaboration technology to fight the vectors a sum of 0.5 million USD will be required, which can not be funded by the state's budget. The World Health Organization can support it.

## **I.4 Identification of existing barriers and policy needs**

Technology transfer in coastal zones faces a number of barriers. Many of these barriers are technology and site specific and therefore require specific interventions and solutions. Among all barriers identified already by the team and stakeholder consultations the following ones are considered as the most significant: (i) lack of funds to cover the high cost of technologies; (ii) lack of information and knowledge regarding adaptation technologies; (iii) lack of capacities for technology utilization and maintenance; (iv) lack of coordination between various stakeholders and institutions; (v) lack of infrastructure like (electricity interruptions) that damage equipment.

The strongest pathway to adapt to climate change in coastal zone is found to be the public sector. Experiences with other countries show that the technology transfer process in coastal adaptation is mostly government drive process. It is the government that has to create and maintain the environment for an effective and successful transfer of technologies through its supportive policy. It is the government that has to encourage and promote national research institutions and organizations if research hand development activities in favor of adaptation technologies.

## **I.5 Define and select actions**

All the adaptation technologies classified as priority ones are represented briefly as project ideas in the Annex II.





## EVALUATION MATRIXES

- **GHG ABATEMENT TECHNOLOGIES**
- **COASTAL ADAPTATION TECHNOLOGIES**

## ENERGY

Table 1: Evaluation matrix for Energy and Transport

		Development benefits (0.3)								Social acceptability and suitability for country conditions (0.25)		Market potential (0.25)				Contribution to Climate Change (0.3)		TOTAL
		JW (50)	FS (50)	HI (100)	CB (50)	EES (50)	EIEI (100)	GE (50)	Yes (75)	No (0)	COC (50)	CA (75)	RPS (50)	GHG R (100)	AP (50)			
	<b>Technology</b>																	
	<b>Households</b>																	
1	Introduction of thermal insulation of households/service (public buildings) which use fuel wood, LPG, electricity and kerosene as energy source to meet space heating demand;	50	35	75	50	50	100	50	75	0	50	75	50	90	50	227.50		
2	Introduction of solar water heaters instead of electric boilers in households/service sector;	50	35	100	50	50	75	40	60	0	30	70	50	100	50	217.50		
3	Introduction of LPG instead of electricity for space heating and cooking in households and service sectors;	25	25	50	30	30	100	30	30	0	40	40	40	50	25	147.00		
4	Introduction of efficient lighting (incandescent lamps instead of fluorescent ones) in households/service/industry;	10	0	60	30	40	50	20	75	0	25	25	30	60	30	128.75		
5	Introduction of thermal times witches in electric boilers (for DHW) in household sector;	5	0	30	20	20	20	25	30	0	30	10	10	30	20	71.00		
6	Introduction of prepayment meters in household sector;	10	5	40	30	30	30	25	35	0	35	15	20	40	30	98.25		
7	Introduction of efficient refrigerators in household/service sectors;	15	25	40	20	30	30	40	60	0	30	40	10	30	30	113.00		
	<b>Service Sector</b>															0.00		
8	Introduction of central heating and district heating in public buildings and private buildings (hotels etc) in service/industry sector	50	40	90	50	40	80	30	60	0	40	60	40	75	40	198.50		

9	Introduction of combined heat and power plants in public buildings and private buildings (hotels etc) in service/industry sector	50	40	100	40	50	100	40	75	0	35	70	50	90	50	225.50
<b>Industry Sector</b>																
10	Improvements of efficient boilers which use coal/oil coke/residual fuel oil/heavy fuel oil as fuel;	50	45	90	20	50	90	45	70	0	45	60	50	65	45	206.25
11	Substitution of coal, residual fuel oil and oil coke fired boilers with heavy fuel oil fired boilers;	35	30	80	10	40	70	20	60	0	35	55	30	60	30	157.50
12	Improvement of power factor in industrial & service consumers;	50	35	80	30	50	100	20	75	0	50	75	50	85	40	209.50
13	Introduction of efficient electric motors in service/industry sectors;	25	25	50	20	20	50	10	55	0	30	30	30	50	20	181.75
<b>Transport Sector</b>																
14	Introduction of public passenger transport with buses and trains instead of cars and mini buses ;	50	50	90	50	50	70	45	65	0	45	65	40	90	45	215.75
15	Introduction of freight transport with heavy trucks and trains instead of small trucks and medium trucks;	35	30	60	20	30	50	20	55	0	25	55	40	80	35	151.75
<b>Agriculture Sector</b>																
16	Introduction of efficient irrigation systems in Agriculture sector;	40	40	50	20	25	25	30	35	0	20	25	20	60	30	121.00
<b>Transformation Sector</b>																
17	Introduction of mini hydro power plants instead of diesel generators;	50	30	90		50	65	45	75	0	40	75	50	90	48	200.40
18	Introduction of wind turbines instead of diesel generators;	30	20	70	30	30	55	25	40	0	30	30	25	70	30	139.25
19	Introduction of gas power plants instead of heavy fuel oil power plants;	20	10	60	30	30	70	10	50	0	20	50	40	60	30	136.00
20	Introduction of hydro power plants instead of heavy fuel oil power plants;	30	10	70	30	40	60	10	30	0	20	40	35	85	35	142.25
21	Introduction of landfill gas plants with 70% recovery;	20	5	75	30	35	25	25	55	0	20	10	15	45	35	113.50
22	Introduction of PV electricity instead of diesel generators;	25	15	65	30	45	10	10	25	0	10	10	15	45	25	96.00

Table 2: Evaluation matrix for Land Used Change and Forestry - Selected technologies

		Development benefits (0.3)							Social acceptability and suitability for country conditions (0.25)		Market potential (0.25)				Contribution to Climate Change (0.3)		TOTAL
		JW (50)	FS (50)	HI (100)	CB (50)	EES (50)	EIEI (100)	GE (50)	Yes (75)	No (0)	COC (50)	CA (75)	RPS (50)	GHG R (100)	AP (50)		
	Technology																
1	Development of local forest sustainable development action plans based on the national ones	6	0	30	11	30	21	0	19	0	13	19	13	30	15	58.90	
2	Monitoring of fire situation to assess the more threatened forest areas from climate change point of view and the desertification scale due to fires	15	0	30	15	30	30	15	19	0	13	19	13	30	15	70.00	
3	Increase of the forest protected area	6	0	30	15	30	30	15	19	0	13	19	13	30	15	67.30	
4	Conversion of the coppice forests to high stem forests by planting the fast -growing species or more capable species to sink CO <sub>2</sub> in an area of 20,000 hectares	15	0	30	15	30	30	6	19	0	13	19	13	30	15	67.30	
5	Reforestation of an area of 100,000 ha on refused agriculture lands, using more capable species to absorb the CO <sub>2</sub> and fast-growing species	15	0	30	15	20	20	25	30	0	30	10	10	30	20	72.50	
6	Regeneration of a forest area of about 15,000 ha with more capable species to absorb CO <sub>2</sub> by planting the fast -growing species and more adapted species to the expected climate change and the sea level rise, harvesting therefore a mix forest	15	0	30	15	30	30	6	19	0	5	19	13	30	15	65.30	

7	Study of the potential of forest biomass usage for energy purposes in rural area	11	0	30	15	30	30	0	19	0	13	19	13	30	13	<b>63.70</b>
8	Monitoring of the forest situation and forest health situation in relation with climate change and sea level rise	15	0	30	15	30	30	0	19	0	5	19	13	30	15	<b>63.50</b>
9	Integrate climate change concerns into the National Strategy for forest development and to other related strategies	15	15	30	15	30	21	15	19	0	13	19	13	30	15	<b>71.80</b>
10	Study on the firewood reduction ways out	5	0	21	15	30	21	15	19	0	13	19	13	30	0	<b>57.10</b>
11	Develop a new law on forest protection by fire associated with the reorganization of the fire protection service	6	0	6	6	30	30	0	19	0	13	19	13	30	0	<b>48.40</b>
12	Rehabilitation of burned forest area	15	0	30	15	30	21	0	19	0	9	13	9	30	15	<b>59.30</b>
13	Identification of firewood needs of farmers and their forest resources to meet them	6	0	6	6	30	30	0	19	0	13	19	13	30	0	<b>76.60</b>



## Agriculture

**Table 3: Evaluation matrix for Agriculture - Selected technologies**

		Development benefits (0.3)							Social acceptability and suitability for country conditions (0.25)	Market potential (0.25)			Contribution to CC (0.3)		Total
		JW (50)	FS (50)	HI (100)	CB (50)	EES (50)	EI (100)	GE (50)	SA&S (75)	COC (50)	CA (75)	RPS (50)	GHG R (100)	AP (50)	
	Technology														
1	Low cost bio-digesters for the manure processing	50	0	100	50	100	0	50	75	50	75	50	100	50	750
2	Anaerobic digester lagoon with methane gas recovery	0	0	100	50	100	100	0	0	0	0	50	100		500
3	Use of urea molasses blocks as a supplement in the diet of ruminants	50	50	0	50	0	100	0	75	50	75	50	100	100	700
4	Implementation of user-friendly inoculants formulations for promoting the nitrogen fixation process	0	50	0	0	100	100	0	0	50	50	0	50	0	400

## Waste

Table 4: Evaluation matrix for Waste- Selected technologies															
		Development benefits (0.3)							Social acceptability and suitability for country conditions (0.25)	Market potential (0.25)			Contribution to CC (0.3)		Total
		JW (50)	FS (50)	HI (100)	CB (50)	EES (50)	EI (100)	GE (50)		SA&S (75)	COC (50)	CA (75)	RPS (50)	GHG R (100)	
	Technology														
1	Reduction of the MSW generated	3	0	9	3	15	9	9	15	5	0	1.25	21	6	96.25
2	Recycling and Composting in order to reduce the organic matter	12	0	12	3	18	12	9	15	5	5	7.5	21	12	125.5
3	Reduction of the quantity of organic material in waste landfill	3	0	10.5	3	15	9	18	0	5	0	7.5	18	6	95
4	Construction of sanitary landfills with recovery gas system	6	0	15	9	24	18	18	15	12.5	7.5	2.5	24	18	169.5
5	Construction of MSW incinerator with energy utilization	6	0	21	12	24	21	12	0	17.5	0	0	15	3	131
6	Construction of WWWT plants.	6	0	21	12	24	9	6	15	10	5	5	9	6	128

## Industrial Processes

Table 5: Evaluation matrix for Industry- Selected technologies																
		Development benefits (0.3)							Social acceptability and suitability for country conditions (0.25)	Market potential (0.25)			Contribution to CC (0.3)		Total	
		JW (50)	FS (50)	HI (100)	CB (50)	EES (50)	EI (100)	GE (50)	SA&S (75)	COC (50)	CA (75)	RPS (50)	GHGR (100)	AP (50)		
	Technology															
1	Steel production by using the stock of the scrap	50	0	100	40	100	100	0	50	25	50	30	100	40		209
2	The use of hermetic technologies for cement production	50	0	100	50	90	90	0	75	50	50	50	100	50		204
3	Small interventions in the main process of Ferro-chromium production	50	0	90	40	80	80	0	40	25	50	50	80	30		176.25

## Climate monitoring

Technology	Criteria												
	Development benefit						Market potential.			Contribute to CC			
	JW	FS	HI	CB	EES	EI	GE	SA&S	COC	CA	RPS	GR	AP
Meteorological automatic station				+	+	+		+	+	+			
Satellite remote sensing	+			+	+	+		+					
Wind records						+		+					
Pluviograph						+		+					
Pyranograph						+		+					
Predicting climate modeling				+	+	+			+	+	+		
GIS	+			+	+	+		+		+	+		
Flood warning and emergency response systems.	+	+	+	+	+	+		+	+				
Better management of rain/waste water	+	+	+	+	+	+	+	+	+	+	+		

## Water Resources

Table 7: Evaluation matrix for water resources

Technology	Criteria												
	Development benefits						Market potential				Contribution to CC		
	JW	FS	HI	CB	EES	EI	GE	SA&S	COC	CA	RPS	GR	AP
Flood warning and emergency response	+	+	+	+	+	+		+	+	+	+		+
Monitoring of sea and shoreline	+			+	+	+		+	+	+	+		+
GIS	+			+		+		+	+	+			
Modernization of the Hydraulic laboratories				+	+	+		+	+	+	+		
Satellite remote sensing				+		+		+		+	+		
Construction of coastal defense structures Gabions, Hand-placed rock walls, Coastal protection units	+	+	+	+	+	+	+	+	+	+	+		+

## Agriculture

Table 8: Evaluation matrix for agriculture

Technology	Criteria												
	Development benefits						Market potential			Contribution to CC			
	JW	FS	HI	CB	EES	EI	GE	SA&S	COC	CA	RPS	GR	AP
Land leveling	+	+		+				+			+		+
Application of minimum tillage		+			+			+				+	+
Application of contour cropping to slope	+	+		+	+			+			+		+
Advancement of sowing dates		+						+			+		+
Introduction of salt tolerant and drought resistant plant species in arid areas.	+	+		+	+	+		+	+	+		+	+
Use of thermal insulating material in farmhouse construction	+	+	+	+		+		+	+	+	+	+	+
Setting up of an alert system for the early warning of abnormal toxic phytoplankton growth and bio-toxins in sea water and bivalve mollusks.		+	+	+		+				+			+
Introduction of vacuum packaging for food preservation	+	+	+	+		+	+	+	+				
Setting up of an network alert system for the identification of vector borne diseases in farm animals	+	+	+	+		+		+	+	+	+		+



## Forestry

<i>Table 9: Evaluation matrix for forestry</i>		Criteria												
	Technology	Development benefits								Market potential			Contribution to CC	
		JW	FS	HI	CB	EES	EI	GE	SA&S	COC	CA	RPS	GR	AP
1	Development of the Forestry Development Strategy that addresses the climate change issue	+	+	+	+		+	+	+	+	+	+	+	+
2	Preparation of the management plans guide based on sustainability development principle	+	+	+	+		+	+	+	+	+	+	+	+
3	Revision, of all the prepared development strategies (of Agriculture, Tourism, etc.) considering the implication of climate changes to have a sustainable development.	+	+	+	+	+	+	+	+	+	+	+	+	+
4	Identification of the climate change and sea level rise effects for 27 forest units of 10 coastal districts.	+	+	+	+		+	+	+	+		+	+	+
5	Effects of forestry investments to climate change.	+	+	+	+		+	+	+	+		+	+	+
6	Study to increase the protection of forest area.		+	+	+		+	+	+	+		+	+	+
7	Study on desertification scale due to fires.	+	+	+	+		+	+	+	+		+	+	+
8	Study and experimentation on better cultivation systems to adapt the forest to climate changes.		+	+	+		+	+	+	+		+	+	+
9	Experimentation on rehabilitation of burned forest area.	+	+	+	+			+	+	+		+	+	+
10	Study on genetically variation among forest tree species and inside of each species.		+	+	+		+	+	+	+	+	+	+	+
11	Forest tree provenance and progeny tests in different conditions of climate.	+	+	+	+		+	+	+	+	+	+	+	+
12	Experimentation of fast-growing species to better adapt in new condition and more capable to sink more CO2 gas.	+	+	+	+		+	+	+	+	+	+	+	+
13	Study and experimentation on rehabilitation of degraded forests.	+	+	+	+		+	+	+	+	+	+	+	+
14	Study and experimentation on the productivity increasing of the low productivity forest.	+	+	+	+		+	+	+	+	+	+	+	+
15	Preparation of Sustainable Development projects for 10 coastal districts	+	+	+	+	+	+	+	+	+	+	+	+	+
16	Preparation of management plans for 27 forest units of 10 coastal units, after the guide to consider the climate change.	+	+	+	+		+	+	+	+	+	+	+	+
17	Implementation of projects to rehabilitate the degraded forest area of 800 ha.	+	+	+	+		+	+	+	+	+	+	+	+
18	Implementation of projects to converse the coppice forests in high stem forests with the same species mostly broadleaf species in an area of 9,000 ha.	+	+	+	+		+	+	+	+	+	+	+	+
19	Implementation of projects to converse the coppice and shrub forests in high stem forests planting the fast-growing species or more capable species to sink CO2 gas always to have mix forests in an area of 9,800 ha.	+	+	+	+		+	+	+	+	+	+	+	+
20	Implementation of projects to afforest an area of about 8,300 ha, especially on the eroded lands and refused agriculture lands..	+	+	+	+		+	+	+	+	+	+	+	+

## Tourism

Technology	Criteria												
	Development benefits						Market potential				Contribution to CC		
	JW	FS	HI	CB	EES	EI	GE	SA&S	COC	CA	RPS	GR	AP
1. Data gathering	+	+	+	+	+	+		+	+	+	+		+
2. Construction of a series of dams intensive refilling of the beaches through a temporary bypassing	+			+	+	+		+	+	+	+		+
3. Construction of dams parallel to the coast ...	+			+	+	+		+	+	+	+		+
4. Construction of a system of dams above and under the sea level and the refilling of the beach with sand retrieved from the sea.	+			+	+	+		+	+	+	+		+
5. Supplying to the sea the sediment amounts	+			+	+	+		+	+	+	+		+
6. “Building with nature” techniques.	+	+	+	+	+	+	+	+	+	+	+		+
7. Protection of sandy dunes and dune management.				+	+	+		+	+	+	+		+
8. Protective constructions in ports and inhabited areas.	+		+	+	+	+	+	+	+	+	+		+
9. Beaches refilling.	+			+	+	+		+	+	+	+		+
10. Constructing and reconstructing the street and railway network			+	+	+	+	+		+	+	+		+
11. Ensuring the efficiency and upgrading of drainage and pumping system	+		+	+	+	+		+	+	+	+		+
12. Preserving the river beds and ensuring their further deepening	+		+	+	+	+		+	+	+	+		+
13. Controlling and eventually stopping the collection of solid matters from the river beds	+		+	+	+	+		+	+	+	+		+

**Table 11:** Summary table of priority coastal adaptation technologies (ordered according to the priority)

Priority	Climate	Water	Agriculture	Forestry	Tourism	Health
I	Better management of rain/waste water	Flood warning and emergency response	Introduction of vacuum packaging for food preservation	Preparation of Sustainable Development Projects for 10 coastal districts	Construction of defense coastal structures	Monitoring system for the quality of drinking water
II	Flood warning and emergency response systems	Monitoring of sea and shoreline	Use of thermal insulating material in farmhouse construction	Preparing of management plans for 27 forest units of 10 coastal units that take climate change into consideration.	“Building with nature” techniques.	Improvement of health infrastructure and services
III	Meteorological automatic station	Modernization of the hydraulic laboratories	Introduction of salt tolerant and drought resistant plant species in arid areas.	Study and experimentation on cultivation systems.	Data gathering (GIS)	Health information system (alert information system)
IV	GIS	GIS	Setting up of an network alert system for the identification of vector borne diseases in farm animals	Study of desertification scale due to fires.	Protective constructions in ports and inhabited areas.	Improvement of structures for diagnosis of various disease-causing vectors
V	Predicting climate modeling	Satellite remote sensing	Application of contour cropping to slope	Experimentation on rehabilitation of burned forest area.	Ensuring the efficiency and the upgrading of drainage and pumping system	
VI	Satellite remote sensing		Alert system for the early warning of abnormal toxic phytoplankton growth and bio-toxins in seawater and bivalve mollusks.	Study of genetically variation among forest tree species and inside each species.	Preservation of river beds and ensuring their further deepening	
VII			Land levelling	Fast-growing species to adapt in new conditions	Construction of a series of dams intensive refilling of the beaches through a temporary bypass	
VIII			Application of minimum tillage	Study and experimentation on rehabilitation of degraded forests	Construction of dams parallel to the coast ...	
IX			Advancement of sowing dates	Implementation of projects for rehabilitation of the degraded forest area through conversion of coppice forests to high stem forests with the same species in an area with fast-growing species. Reforestation of the eroded and refused agriculture lands and rehabilitation of the burned forest.	Protection of the elevated rocky coast above and under the sea level and the refilling of the beach with sand retrieved from the sea.	
X				Study and experimentation on rehabilitation of degraded forests	Supplying to the sea the sediment amounts	

## **PROJECT IDEAS**

- **GHG ABATEMENT TECHNOLOGIES**
- **COASTAL ADAPTATION TECHNOLOGIES**

## ENERGY

<b>Project 1</b>	<i>Introducing thermal insulation of households/service (public buildings), which use fuel wood, LPG, electricity or kerosene as energy source to meet energy demand for space heating and air conditioning.</i>
<b>Sector</b>	Energy
<b>Objectives</b>	<p>The overall objective of the project is to increase security of supply for electricity and heat in Albania by promoting the least cost solution in demand side through thermal insulation of the outside areas of buildings in public service public and households sectors (private buildings).</p> <p>The immediate objective of this project is to enable the various Albanian stakeholders to take decisions regarding potential projects within thermal insulation of outside areas of public and private building stock.</p> <p>Other related objectives are:</p> <ul style="list-style-type: none"> <li>• Significant increases of the investment in Energy efficiency and savings in Albanias new private households and new public buildings through implementation of Energetic Building Code of Albania;</li> <li>• Significant increase of energy supply security by increasing energy efficiency, which in the same time will reduce GHG and acid rain gases and will be environment friendly;</li> <li>• Significant increases of bankable projects in energy efficiency through demand side management (by introducing thermal insulation in existing and new stock of buildings) measures;</li> </ul> <p>Improvement of data reliability on energy efficiency in household and public buildings.</p>
<b>Country</b>	<b>Albania</b>
<b>Budget,</b>	54.28 million USD
<b>Project linkage to national priorities</b>	Climate change issue is seriously addressed in the National Energy Strategy which complements the National Strategy on Socio Economic Development (NSSED). Among other policies addressed in the National Energy Strategy is the thermal insulation of the buildings. In this regard the proposed project is expected to contribute in the implementation of the energy strategy and definitely contribute to the attainment of the sustainable development and Millennium Development Goals/Goal 7. Also the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Background</b>	<p>The availability of energy supply in Albania is one of the key limitations on economic growth and power reduction. Electricity and other forms of energy are key inputs to support economic growth, income generation and job creation, industrial activities, commerce, the service sector, communications and transport. During the Albanian transition period, the chronically shortage in power supply has taken forms of sharp crisis especially during the winter periods. The increasing need for power supply in Albania cannot be met with only country resources anymore. Although the installed national productive capacity is around 1 600 MW, since it is based on hydropower production, it lacks efficiency and operates under its nominal capacity because of shortage on water resources as a consequence of prolonged dry seasons. In general, the national power production satisfies actually less than 2/3 of the consumption needs, the balance is covered through imports and load shadings. Other reasons contributing to the worsening of the energy situation include the lack of sizeable investment in power production, the delays in sector regulation, unbundling and liberalization, the mismanagement of demand and supply balance, the weak cost recovery, the subsidized electricity costs, the pattern of energy consumption, the losses in the power transmission and distribution networks and the level of abuses and non-payment of electricity bills, which is still high. Since the electricity demand is estimated to increase with a rate of 89 % per year during the coming years, it is evident that there is a need for new generation capacities, which should be mainly thermal, in the near future.</p> <p>The households and service energy sectors are one of the important energy consuming sectors in Albania. Its importance is highlighted by the fact that it consumes large quantities of electricity, LPG and fuel wood, which has contributed to the countrys current severe energy crisis. As a result, there was an over cutting of trees (much of which is illegal) and overloading the electricity distribution system. Electricity is supplied to the regions by a 110 kV transmission line that is far away from the power plants. This phenomenon has brought in a very low level of voltage in electricity supplied, which is down 150 V in household sector. The growing use of electrical appliances, fuel wood shortages and other related issues, such as access and prices, are worrying and can cause further future problems.</p> <p>Existing building stock in Albania is responsible for more than 48% of final energy consumption, a figure which will become higher in the future due to the coming stock to be built. The new stock is built without any idea to apply the existing building code and the new energetic building code, which is prepared recently by the National Agency of Energy. This is why it has much sense to know the potential for the penetration of thermal insulation in households and public buildings.</p> <p><u>Thermal insulation in households buildings</u></p> <p>In households, most part of energy resources is consumed for space heating, while most of the dwellings are not thermo-insulated, they have old windows and mostly electricity is used for space heating. Knowing that the main heat losses with transmittance and ventilation come from outside walls, roof/terrace and windows, the analysis has taken into consideration these elements separately and together.</p> <p><u>Thermal insulation of roofs and terraces</u></p> <p>Normally, heat losses from the roof/terrace are estimated at approx. 25-30% of total losses. Taking this into consideration, energy conservation from thermo insulation of roof/terrace was calculated through respective programs prepared by National Energy Strategy for different types of buildings. Table 5.1 foresees the thermo insulation percentages, for each zone (Albania is divided into three zones as per grouped heating degree days). The analyses include the investments starting in 2004 and terminating in 2015, for the whole existing stock to be thermo insulated. Based on calculating programs of heat losses and LEAP software, energy conservations from implementing of this measure together with the saved cost per kWh in 2015, are estimated and presented in table 1 as well.</p>

**Table 1: Main indicators of terrace/roof thermal insulation analysis**

Name		% of thermal insulation in 2015	Total saving ktoe	Unit cost \$/kWh
Zone I	Urban	25	2.06	0.0288
	Rural	20	0.53	0.0592
Zone II	Urban	30	1.38	0.0283
	Rural	25	0.93	0.0580
Zone III	Urban	35	0.81	0.0255
	Rural	30	0.75	0.0385

As indicated by the above analysis, the interference of thermal insulation in the existing stock is very effective, since the unit cost of thermal insulation varies from 2.6-5.8 cent/kWh.

#### Change of windows from single to double glasses

Theoretically, heat losses through transmission and ventilation from the windows are 15 -20% of the total losses in a dwelling. For Albania, energy savings from substitution of existing windows with duralumin double glasses ones was calculated according to the respective programs prepared by the National Energy Strategy. As a consequence, for each zone the percentages of changing the old windows with double glass duralumin ones are foreseen, as given in Table 5.2. Investments are foreseen to start in 2004 and terminate in 2015. Energy saved from implementing of this measure was also calculated for each zone, as well as saved cost per kWh in 2015. All parameters are given in table 2.

**Table 2: Main indicators of installing double glass windows analysis**

Name		% Installing double glass windows in 2015	Total saving ktoe	Unit cost \$/kWh
Zone I	Urban	80	2.47	0.047
	Rural	70	1.18	0.057
Zone II	Urban	80	1.64	0.037
	Rural	70	1.12	0.068
Zone III	Urban	80	0.97	0.024
	Rural	70	0.91	0.043

As indicated by the above analysis, the introduction of duralumin windows with double glasses is efficient with an investment unit cost of 2.4-6.8 cent/kWh.

#### Thermal insulation of outside-walls

The third element analyzed is the sidewalls, where transmission thermal losses reach a level of 40 -50%. Based on world experience and calculations made by the NAE for different types of buildings, for each zone the percentages of sidewalls thermo insulation, given in table 3 are foreseen. As indicated by the table, the percentage of sidewalls thermo insulation in the third zone will be higher due to greatest effect. Investments are foreseen to start in 2004 and terminate in 2015. Energy saving from implementing of this measure was also calculated for each zone as well as unit cost per kWh of saved energy in 2015. All parameters are given in table 3.

**Table 3: Main indicators of thermal insulation of outside wall analysis**

Name		% Installing outside walls in 2015	Total saving ktoe	Unit cost \$/kWh
Zone I	Urban	15	3.67	0.013
	Rural	10	0.96	0.023
Zone II	Urban	20	2.46	0.014
	Rural	15	1.68	0.023
Zone III	Urban	25	1.45	0.011
	Rural	20	1.35	0.022


#### Thermal insulation of public buildings

In the service sector, particularly in public buildings, most part of energy resources is consumed for space heating. The existing stock of buildings is not thermo insulated, it has old windows and in most cases electricity is used for space heating. Based on world experience and studies carried out by the NAE and other institutions, and taking into account that the main losses of heat in buildings are those from heat transmission from walls, roofs and terraces as well as those from ventilation and transmission from windows, was foreseen that the public building stock till 2015 will be thermo insulated and the existing windows substituted with double glasses windows. These measures are foreseen to save energy from 0.5 ktoe in 2004 to 10.5 ktoe in 2015, affecting on electricity and fuel wood consumption decline.


It should be emphasized that this is a measure with a longer-term effect in the energy save, based on the longevity of thermal insulation, which is 40 years. In the figure 1 is shown the energy saving of public buildings and the figure 2 shows investments for thermal insulation of public buildings (US\$ million). The total investments for thermal insulation till 2015, are foreseen to be 18.8 Million US\$ and energy saving 25.5 ktoe. The total unit cost of three thermal insulation interferences is within the range of 1.1-6.8 cent per kWh. The calculation of unit cost does not take into consideration the fact that the energy savings profits will continue after 2015, otherwise this fact would reduce even more the unit cost of energy savings. As a conclusion, thermal insulation is a measure with economic profit and necessary to be implemented. The positive effect of thermal insulation will be even higher (and unit cost would be even lower) if one takes in consideration the effect on energy demand reduction regards air conditioni



# GHG ABATEMENT TECHNOLOGIES

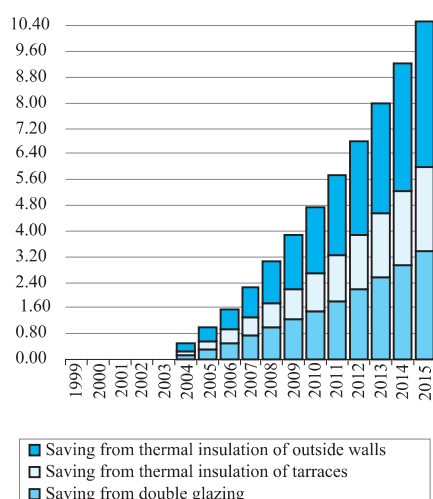

**Figure 1:** Energy save from thermal insulation of public buildings (ktoe)

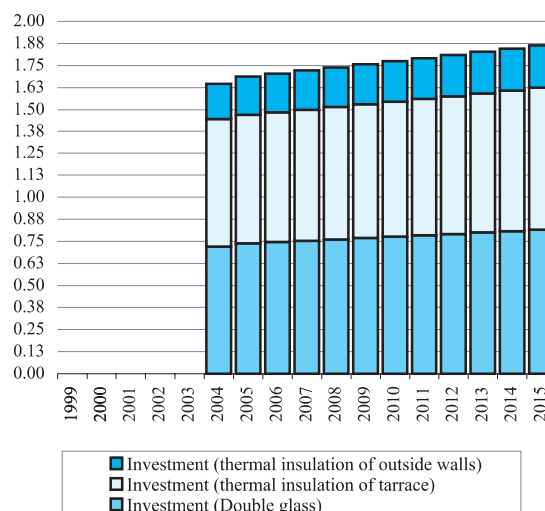

**Figure 2:** Investments for thermal insulation of public buildings (US\$ million)

## Expected outputs

The main argument in favor of thermal insulation is that it enables an advantage to meet space heating demand (and air conditioning demand) with less energy commodities. Other detailed specific benefits are:

- Increased energy security of supply in general and electricity supply in particular by introduction of thermal insulation in service and households sectors;
- National energy efficiency improved;
- Reduced levels of GHG emissions and other environmental pollution substances such as SO<sub>2</sub>, NO<sub>x</sub> which cause the acid rain phenomena;
- Promoted investments and job created in service and households sectors;
- Increased reliability of energy data necessary for household and service sectors concerning energy commodities in space heating and air conditioning;
- Estimated investment needs and a cost benefit analysis of a short-term, 3-5 years, and program aiming at improving the energy efficiency in building stock;
- Increased levels of trained stakeholders.
- Higher oil and total self-sufficiency, which mean lower trade deficit from energy sector.

## Stakeholders to be involved Required Technologies

NAE, the EEC, Ministry of Industry and Energy, Ministry of Environment, Ministry of Finance; Environmental NGOs; various private installing companies of thermal insulation (ESCO model) concerning all issues of thermal insulation;

After the Second World War Eastern European countries (including Albania) had a very large housing problem. An extreme demand for modern dwelling existed. The requirements at a short construction time, low costs and industrialized production at building elements led to mass-construction and prepared concrete building. Unrealistically low energy prices and lack of appropriate building materials has resulted in buildings with low levels of thermal insulation, little or no means of regulating the heating levels and individual metering or billing of energy consumption. This has resulted in very high-energy consumption especially for pre-fabricated buildings.

Four principally different types of buildings have been designed:

- Wall made of heavy-weight solid concrete blocks with all elements as load carrying parts;
- Wall-size solid concrete elements with doors and windows installed, already at the concrete plant;
- Insulation in the corners to reduce thermal bridges because of complaints from the occupants about the low levels at thermal comfort. The size of the rooms and the wall elements is increased. Also the window area is increased and a different type of concrete is used to improve the thermal performance;
- From the beginning at 1980-s the wall had a layer at interrelation (mainly polystyrene) between two layers at light-weight concrete.

In particular buildings constructed between the 1950 and the mid at 1970 have higher energy consumption levels. About 60% of the total amounts at prefabricated buildings are of this type. Buildings constructed later have a better thermal performance but still have very low level of insulation.

### Insulation methods

It may be tempting only to insulate the parts of the buildings where large amounts of heat are lost, like the roof and the gables, to reduce costs, which have been the most used method in eastern and central European countries. In many cases, however, it is not a very good economic solution, because the major costs for renovation for buildings are often the costs for scaffolding and workers and the material itself. If the performance of the whole building is improved, the investments for energy saving will be much lower. In some cases partial insulation can even make the situation worse and increase the heat losses. If the insulation material is glued directly into the gables, which has been the common method for applying insulation in eastern and central European countries, large movements in the wall elements can cause cracks in the insulation material and the concrete, more heat to escape through the envelope and to increase the amount of thermal bridges. To achieve maximum effect from retrofitting and to reduce the energy losses

from the building surface, it is necessary to access how the following areas can be improved:

- Walls
- Roofs
- Basements
- Windows/doors
- Opening in the building surface.

## Insulation of walls

Thermal retrofitting of wall can be carried out into different ways:

- Internal insulation
- External insulation

For both types of insulation the major advantages are decrease in energy consumption as well as the increase in thermal comfort due to increased wall surface temperatures.

## Interior Insulation

This method is mainly used for retrofitting of older buildings where the facade must be kept in the original form, for buildings only use occasionally and where the occupants are interested in individual solutions. The advantages with interior insulation are that the costs of material and the costs of installation are relatively low. However the following problems can arise with interior insertion:

- Front damage to pipe in the outer wall;
- The outer walls are exposed to the weather, which means thermal movements in the walls. Cracks can occur;
- Existing moisture problems must be dealt with before the fitting of the insulation;
- It is difficult to install the insulation behind pipes, radiators etc;
- Electrical wiring must be reinstalled and condensing water can penetrate wall sockets;
- The dew point will be in the wall construction or on the surface of the inside of the wall which can lead to severe damage due to condensation;
- It is practically impossible to avoid thermal bridges.

This method should, due to the above-mentioned problems, be avoided if other possibilities exist.

## Exterior Insulation

Using exterior insulation can eliminate existing thermal bridges, concrete damage can be repaired and significantly reduced losses and the lifetime of a building will be extended. Problems with condensation are generally avoided, the dew point is not in the wall anymore and the construction is kept dry. Before installing an exterior layer of the insulation the load bearing abilities of the wall must be tested and existing damage and cracks must be repaired. Furthermore, it is often necessary to test the concrete. The costs for installation can be reduced significantly if it is carried out in combination with general renovation of the building: composite constructions with a ventilated air void, and direct application of the insulation without an air void.

## Roofs

The installation of roof insulation is relatively easy and the pay-back period is short. No scaffolding is required and the insulation can be fitted either directly on the existing roof or under the roof. The heat losses from roofs can be very large due to night-time radiation to the sky. Large amounts of energy can therefore be saved by installation of insulation.

## Flat roofs/heated roofs

In this case, no cavity exists between the roofing surface and the existing insulation. A vapor barrier exists on the heated side of the insulation. Insulation on the inside of the roof must be avoided. A reverse roof is better, where e.g. polystyrene boards can be quite directly onto the existing water-proof roofing filled with a layer of gravel that is at least as thick as the layer of polystyrene.

## Cold roofs

Here a void exists between the existing layer of insulation and the water-proof layer of roofing felt. The void is ventilated vapor barriers exist on the inside of the roof. The vapor barrier is removed and an extra of insulation can be installed as well as new vapour barrier.

## Pitched roofs

Mineral wool bats can be installed between the wooden beams. A vapor barrier on the warm side of the insulation is necessary. In northern European Countries a thickness of 20 cm or more is common for roof insulation.

## Basements


To avoid large losses from basements it is also necessary either to insulate the ceiling of the basement or to continue the external insulation to at least 30 cm under the ground level. If this is not done the floor will act as a thermal bridge.

## Windows and doors


The windows are normally the weakest points of a building from energetic point of view. The losses can be divided into transmission losses and ventilation losses. The transmission losses through glass are 4-6 times bigger than the walls and often thermal bridges exist between the frame and the wall. The ventilation losses also can be very high if the windows do not close tight or if there are gaps between the frame and the wall. Large amounts of heat are lost when the windows are used for fresh air supply. Installation of double glazing can reduce the transmission losses from windows. The k-value can be reduced from 3 -5 [W/m<sup>2</sup> K] to lower than 2 [W/m<sup>2</sup> K]. New types of glass materials exist with k-value of about 1.2 [W/m<sup>2</sup> K], but are still in the developing phase. Weather proofing of the windows (foam material, tape or cloth) can reduce the unwanted ventilation losses significantly. To reduce the thermal bridges it is necessary to improve or replace the material between the frame and the wall.

## Reduction potential of GHG emissions


A reduction in the amount of pollution follows from the more efficient energy commodities will come from the penetration of thermal insulation in private and public buildings.

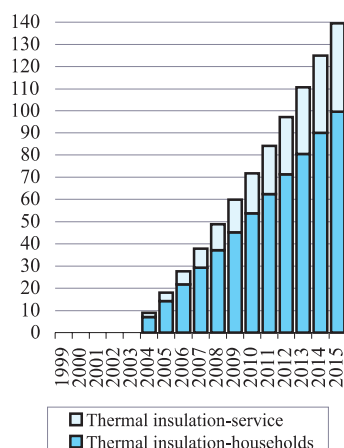

**Figure 3:** GHG reduction from the introduction of thermal insulation measure (1000000 kg)

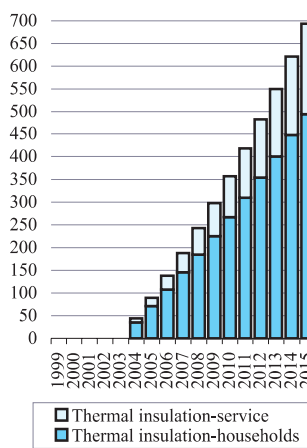

**Figure 4:** SO<sub>2</sub> reduction from the introduction of thermal insulation measure (1000 kg)

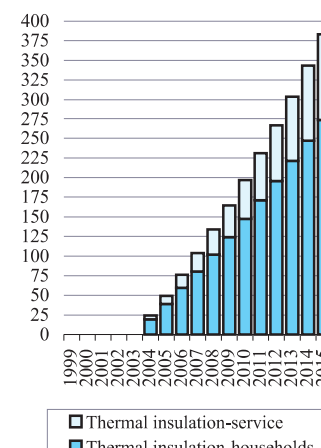

**Figure 5:** NO<sub>x</sub> reduction from the introduction of thermal insulation measure (1000 kg)



In the figures 3, 4 & 5 the reduction of green houses gas emissions and SO<sub>2</sub> & NO<sub>x</sub> from the penetration of thermal insulation measure are shown. As it is shown in the figure the amount of reduction for GHG, SO<sub>2</sub> and NO<sub>x</sub> will be respectively 139.4 Million kg, 693.6 thousand kg and 383.3 thousand kg in the year 2015. The cost of GHG reduction is 6.5 cent/kg.

## Barriers and additional information

Most of the barriers regarding to thermal insulation are related to the identified problems through surveys carried out concerning the thermal insulation situation of existing stock of buildings. Questions and results made during the surveys are as following:

*How is the thermal insulation state of your dwelling?*

The main scope of this question is to know in what state are the dwellings from the thermal insulation point of view (as is shown in the figures 6 & 7). The processing of data received from the analysis of questionnaires indicates that 59% of them (1187 from 2000 interviewees) are in bad state.

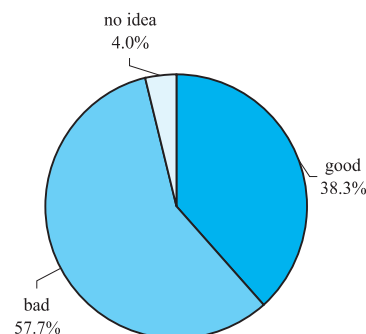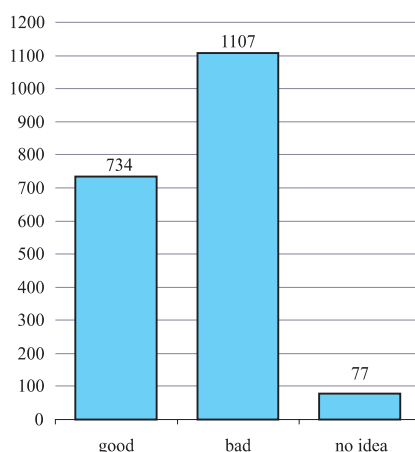


**Figure 6 & 7:** Number of interviewees related with thermal insulation state of their dwellings.

Second group of 37% declares that their dwellings are in good conditions viewing it from thermal insulation point of view. The third group, which is 4% of all interviewees, accepts that they have no idea concerning thermal insulation state of their dwellings. From this analysis result a main conclusion: **the existing dwellings stock is in very bad conditions as regarding the thermal insulation, consequently all energetic institutions engaged at the dwellings energetic state should have as a crucial problem the dwellings thermal insulation.** The improvement of the existing dwellings stock from the thermal-insulation point of view and construction of new dwellings based on the new energetic code (that is approved already by the Albanian Parliament on September 2002) will make possible the saving of energy sources that are used for the space heating. On the other side, the energy saving which results consequently from the dwellings thermal insulation will make possible to burn less fuel in order to meet the heating needs and thus less chemical polluters will be thrown on the environment.

*And if it is bad, where is it?*

In the analysis done for the question 2 resulted that 59% of the dwellings (houses) in Tirana city are in bad conditions. Immediately after this observation, naturally the other question was asked: "In which elements the thermal-insulation is in worst conditions?"

Figures 8 & 9 illustrate graphically the interviewees' distribution as per their answers on this question. From elaboration of the survey data results that 27% declared that windows are the most problematic elements. From the energetic building theory it is known that the bad condition of windows has two big defects: first- there are big losses because of the increased ventilation and second- the heating losses because of thermal insulation are increased, i.e. when the windows are in bad conditions we have a high heating transmission coefficient. The second most problematic elements, as is shown by the figures, are the lateral walls, which make up 24% of the interviewees' answers. The bad conditions of the walls from the view point of thermal insulation makes possible that the general heat transfer coefficient for the entire house to be much higher.

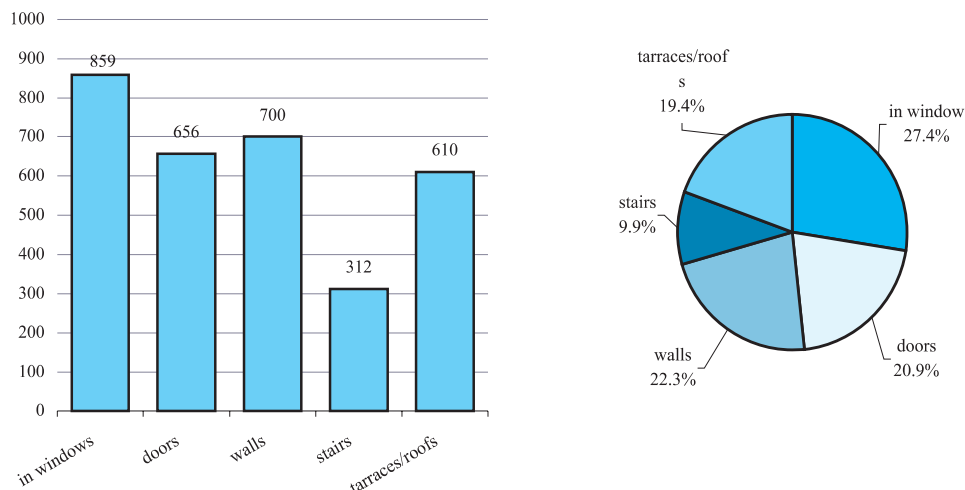

**Figures 8 & 9:** Number of interviewees related with elements of dwellings with bad situation of thermal insulation.


The third most problematic element is dwelling external doors. From the elaboration of the data results that 205 from them (656 from 1187 that have declared that the thermal insulation state is bad) are in bad conditions. This without doubt sends us in the same situation as with bad windows. The fourth most problematic element is the dwelling terrace. From its bad condition we have also big energy losses. The final conclusion of this analysis is:

**Due to the bad condition of all elements: windows, walls, doors and terrace, a high transmission heating coefficient of the dwelling will result, which means more burned fuels to meet the demand for heating and cooling. This will lead in more emissions of the chemical pollutants in the environment consequently leading to a more stuffy environment where we live, a contribute increase in the acid rains and increased chances of the greenhouse gases effect or global warming.**

*Do you think that renovation of thermal insulation in yours dwelling and new energetic standards of construction will help energy savings of energy and a clean environment?*

The Albanian Energetic Building Code was prepared and approved by the Albanian Parliament on September 2002 and has been effective entered into force since December 2002.

From the answers of the interviewees, 91% of them (1818 from 2000 interviewees) think that the renovation of thermal insulation in their dwellings and the new energetic standards of construction will help energy savings and protect our environment. In Figures 10 and 11 are given graphically the share of answers to this question.

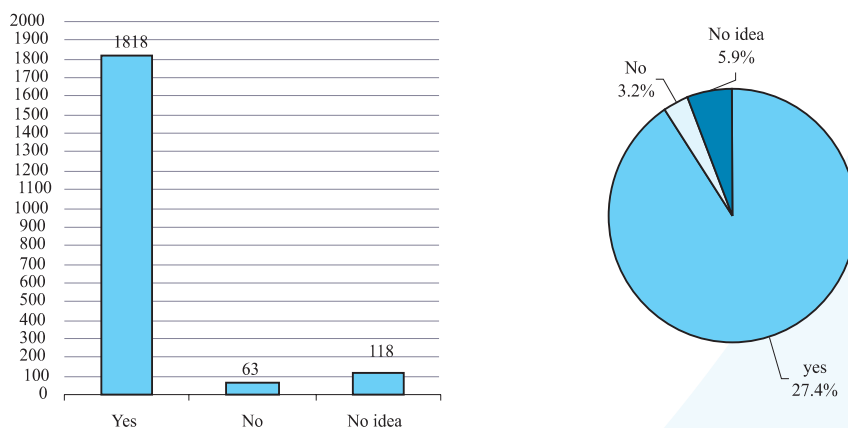

**Figures 10 & 11:** Number of interviewees expressing the idea that renovation of thermal insulation and new energetic standards will contribute in energy savings and a clean environment

## *Do think that you can improve thermal insulation state of your dwelling?*



After analysis of the background of thermal insulation issues, their advantages on the energy saving, environment protection and the barriers for implementation of this technique at our homes, we tried a direct question: "Do think that YOU can improve thermal insulation state of your dwelling?"

The difficult financial conditions of a lot of Albanian families are behind the responses of the most of the interviewees (57%); they are not able to implement realize by themselves the thermal -insulation of their building even though they are conscious for the importance and profits of the thermal -insulation as confirmed by them on the above questions. In Figures 12 and 13 is given the graphic presentation of the interviewees' answers share to this question.

The situation gets more difficult if we underline that the Albanian banking system on loans is very weak, loans given are limited and when approved the bank interest rates are very high over 25% per year (whereas the maximum in the Western Europe are 5 -7%). These high interests' rates lead to negative profitable investment results when realizing the building thermal-isolation.

Therefore everywhere in the Western European countries and in some countries in Central Europe (Poland, Check Republic) funds for the energy saving programs are established. These funds support the Energy Saving Law compiled in these countries and at the same time in most of the cases they are in cooperation with the funds for the environment protection, because every measure being taken for the energy saving has also lead simultaneously to the environment protection.

Alike the present realities in the Western countries, it is necessary that these funds are soft loans and paid off on in a long period of time. Albania has to follow this experience in order to make possible big ax in implementation of thermal -insulation of their buildings, because this is in the interest of Albanians as decreases the heating and cooling cost and in the interest of the whole country because reduces energy needs in at the national level, increases fuel reserves and the environment protection.

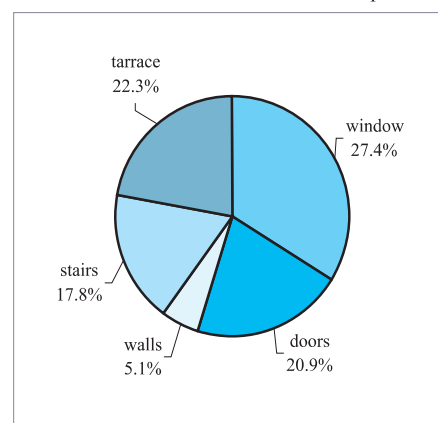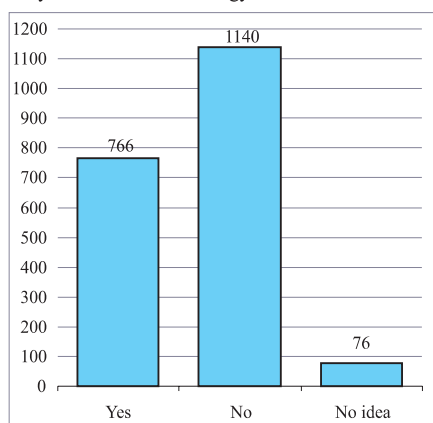

**Figures 12 & 13:** Number of interviewees related with idea that if they can contribute in thermal insulation of their dwelling



The above analysis also indicates the promising fact that 38,5% (766 from 2000 of the interviewees) have been positively answered: Yes, they can implement within their budget the building thermal-insulation. This is very important because they not only understand the priority the thermal -insulation for the energy saving and the environment protection brings, but in distinction from the above group they dispose the necessary family budget to realize the thermal -insulation, an investment that without fail will bring them a financial profit, without any risk and a self-payment investment period less than three years.

## *And if "Yes" where?*

Figures 14 and 15 show graphically the share of answers as per the elements of the buildings that the interviewees think is more profitable to intervene.

The biggest group (39,6% or 491 of the interviewees) has declared that is better to thermal -insulate their windows. As has been also declared in the genuine scientific analysis of energetic building experts, the weaker point in a building, from the energetic viewpoint are the windows and the interviewees with their vital intuition know this. This is very important because we do not need to explain everything about this problem.

The second group (22,7% or 491 of the interviewees) declared they will thermal insulate the terrace and the roof of the building. This is also very important because is well known that through the terrace and the roof the total heating losses of all the building may reach up to 30%.

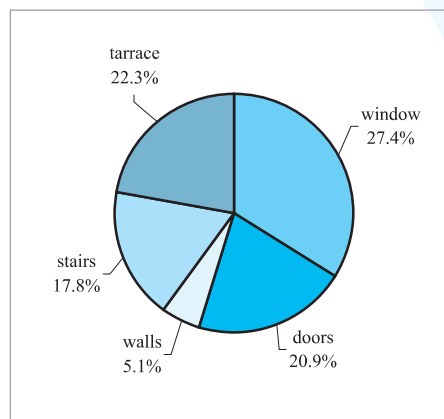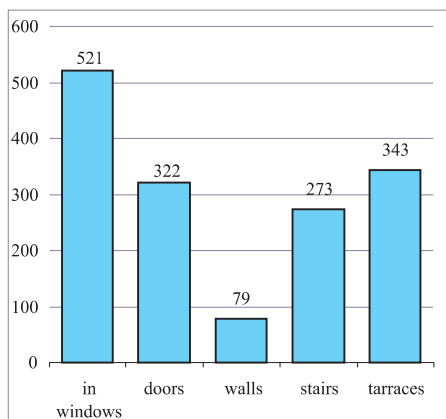

**Figures 14 & 15:** Number of interviewees related with elements of dwellings where they can contribute to apply thermal insulation

In the third group are included those who declared that would dedicate more attention to the outer building's doors. This group constitutes 21.4% of the interviewees and does not have any major difference with the second group. In the last group those who think that can apply by themselves the thermal insulation of the outer building walls are included. In this group 18.1% of the interviewees who answered positively to the eight questions are included.

**The final conclusion of this analysis regarding thermal insulation issues is that the interviewed people with their own intuition go in accordance with the scientific ones.**



<b>Project 2</b>	<b><i>Introducing District Heating (DH) and Combined Heat and Power systems in industry, service and households sectors to meet energy demand for heating and electricity in Albania</i></b>
<b>Sector</b>	Energy
<b>Objectives</b>	<p>The overall objective of the project is to increase security of supply of electricity and heat in Albania by promoting the penetration of DH &amp; CHP schemes in industry, service and households sectors.</p> <p>The immediate objective of this project is to enable various Albanian Stakeholders to take decisions regarding potential projects within DH and CHP, and to develop a project document for a feasible pilot project in Tirana.</p> <p>Other related objectives:</p> <ul style="list-style-type: none"> <li>▪ Increase possibilities to invest in those schemes through Albanian private money and foreign investors;</li> <li>▪ Increase capacity building to enable various Albanian Stakeholders (energy and environmental institutions and as well as the public and private businesses like industrial enterprises, hospitals, hotels etc) independently undertake similar projects in the future.</li> </ul>
<b>Country</b>	Albania
<b>Budget</b>	96.3 Million USD
<b>Project linkage to national priorities</b>	Climate change issue is seriously addressed in the National Energy Strategy which complements the NSSD. Among other policies addressed in the National Energy Strategy is the promotion of DH and CHP systems. In this regard the proposed project is expected to contribute in the implementation of the energy strategy and definitely contribute to the attainment of the sustainable development and MDGs/Goal 7. Also, the project will contribute to meet the Albania's commitments as a Party under the UNFCCC.
<b>Background</b>	<p>Combined Heat and Power Plants (CHP) in 1960 -1980 have been more developed than Heat only Boilers (HOB), which from their side are used only in hospitals, the Student City, industry, institutional buildings and in any other small places. CHP instead of HOB has played an important role in supplying technological process heat to industrial customers. To a minor extent it has also provided a source of heat for the space heating needs of industry, service and the household sectors.</p> <p>The first TPPs installed in the early mid 1950s at Maliq, Kucova, Vlora, and Cerrik, had capacities smaller than 10 MW, and were coal fired. All of the 9 TPPs installed in Albania produced both heat and power. Four of them (Ballshi, Kucova, Cerrik, and Maliq) were dedicated plants supplying heat only to the respective refineries, and the other five were planned to supply electricity and heat to a variety of end-users. During the 90s, heat provision to industrial customers was severely reduced due to low industrial demands. However, many of the older plants have very degraded heat distribution systems, which have not allowed their full capacity. Therefore, some of them are stopped now, like Tirana and Korca and only they were planned to provide heat supply to the household sector.</p> <p>CHP and DH sector in Albania needs rehabilitation, suitable adaptations in equipment and operating methods to reduce damage to heating and generating units. There are studies for new thermal power plants and for the expansion of the existing facilities. Based on the general rule that District Heating (DH) is not economically feasible in buildings that are not equipped with a hot -water circuit, DH may be a viable option in colder urban areas in Albania, with many flats or larger buildings, new ones that are already equipped with hot-water boiler system.</p> <p>In order to know the potential for the penetration of district heating and combined heat and power plant in the National Strategy of Energy two scenarios are established: the passive and the active ones. Heating demand for both scenarios are respectively 800 GWh<sub>thermal</sub> (active) and 180 GWh<sub>thermal</sub> (passive) for the year 2015 for three sectors.</p> <p>This amount of heat as emphasized above will be provided through central heating schemes and SSCHP. Figures 16 and 17 shows the forecast for future production of heat in the respective plants according to active and passive scenarios. In the active scenario the main role in heat production is foreseen to be played by CHP plants, while in the passive scenario are the central heating plants. This is another advantage of the active scenario compared to the passive one, because it makes possible to produce heat with a much higher efficiency (85-90% from SSCHP) compared to the production from central heat plants (70%).</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>■ Dedicated ■ Existing CHP ■ New CHP</p> </div> <div style="text-align: center;"> <p>■ Dedicated ■ Existing CHP ■ New CHP</p> </div> </div>

**Figure 16:** Demand for heat in households, industry and service according to active scenario (GWH).

**Figure 17:** Demand for heat in households, industry and service according to passive scenario (GWH).

	Figure 18 shows the forecast of heat and electricity production from central heating plants and SSCHP according to the active and passive scenarios, and the difference between them (GWH). Figure 19 shows the assessment for necessary investments according to both scenarios for the installation of central heat and cogeneration plants. The required value of investments for year 2015 is estimated to be 14 million US\$.
<b>Expected outputs</b>	<p>The main argument in favor of CHP is that it enables an advantage of producing electricity locally and at the same time it enables the use of 2/3 of the non-used heat. Other detailed specific profits which can be considered as expected outputs are:</p> <ul style="list-style-type: none"> <li>■ Increased security of electricity supply by introducing DH &amp; CHP schemes in industry, service and households sectors. An installed capacity of DH would be 100 MW and for SSCHP would be 75 MW;</li> <li>■ Improved levels of the national energy efficiency;</li> <li>■ Local electricity production which in turn reduces technical losses and energy transmission cost;</li> <li>■ Reduced levels of GHG emissions and other environmental pollutants like SO<sub>2</sub>, NO<sub>x</sub> which cause the acid rain phenomena;</li> <li>■ Promoted investments in industry, service and households sectors;</li> <li>■ Different feasibility studies (technical, financial, economic and environmental) prepared. This is expected to create the basis for a priority ranking for different sites.</li> <li>■ Fully developed bankable project, for the selected sites;</li> <li>■ Designed proper tariff system for electricity and heat for the chosen site including any databases and data processing program used during all activities;</li> <li>■ Increased levels of trained stakeholders</li> </ul>
<b>Stakeholders to be involved</b>	NAE, Ministry of Industry and Energy, Ministry of Environment, Albanian Power Corporation (KESH), and Energy Regulatory Entity (ERE); Ministry of Finance; Environmental NGOs and various ESCO companies concerning all issues of CHP.
<b>Required Technologies</b>	<p>District Heating may be defined as the supply of the space heating and hot water to a number of buildings from a central heating plant or a group of heating plants, which are linked to each other. In many cases some of them may be a Combined Heat and Power Plants. The heat produced in this plant is delivered to the consumers as hot water or steam through an insulated, double pipe line system. The heated water is carried in the supply pipeline. Having given up its heat, the cooler water returns to the plant in the return plant for reheating. As it is known, the district heating systems may vary in size from those serving a small group of houses to those covering a whole metropolitan area. Any kind of fuel or any source of waste heat may be utilized in district heating system, and systems over a certain size may comprise more than one heating stations eventually using different kind of fuels. The pipeline network will often comprise both large line linking the major plants with population centers as well as smaller lines for distribution to the individual users. The heat is transferred from the transmission lines to the distribution network via heat exchangers.</p> <p>District Heating gives the consumer a comfortable and reliable supply. It is easy to use, can't be seen, heard or even smelled. The absence of individual smoke stacks makes it an environmentally sound heating solution. It has a long tradition in many countries dating back to the early decades of the previous century. The predominant sources for heat production have been coal, lignite, oil, natural gas, peat, straw, and wood chips have been used by a number of various plant manufacturers. Plant size may vary from a few to some sources of MJ/second. Combined production of heat and power has demonstrated improvements in efficiency from 35-40% or less in most old types of condensing power plants (for producing only electricity) up to 85-90% in modern CHP plants built as extraction types or back pressure units. In general, low temperature district heating is favorable because of reduced losses. In CHP/DH systems also low temperature means an increased electric efficiency at the power station.</p> <p>The extent and branching of the system are determined according to the location of the heating plants, the location of consumers, the possibility of the practical placement of the pipes, and a financial evaluation that takes into consideration the heat loss from the pipeline. The larger district heating connection over a given area, the better the efficiency. In order to ensure a sufficient supply temperature, the flow and return piping are sometimes short-circuited by means of bypasses. One often distinguishes between the following types of district heating pipes:</p> <ul style="list-style-type: none"> <li>■ Transmission pipes leading heat from large heating production plants (e.g. heat and power stations) to one or more local distribution networks, where the heat is transported further on, first passing a heat exchanger;</li> <li>■ Main pipes leading heat from a heat exchanger/district heating stations to the service pipes. The main pipes normally follow streets and roads;</li> <li>■ Service or branch pipes leading heat from the main pipes to individual consumers.</li> </ul> <p>Main pipes and service pipes constitute the actual district heating system. The construction of district heating systems requires large investments in capital-intensive installations, not only in production units but in well-insulated long transmission lines. The economic consequences for the companies and consumers that follow the introduction of a new DH project, a systematic analysis of the socio-economic consequences is necessary for a complete evaluation of the project.</p> <p>SSCHP Technology: Energy schemes, which combine electricity generation with heat for ensuring space heating and/or specific industrial processes, are frequently referred to as Combined Heat and Power (CHP) or cogeneration. CHP schemes can incorporate district heating.</p> <p>Cogeneration cycles can be categorized according to the sequence in which the power and thermal energy are produced. The typical topping cycle cogeneration system produces firstly electricity and after that fuel gases are used to produce as a by-product the heat. This is based on a gas combustion turbine; however, reciprocating engines and steam turbines are also consistent with topping cycle cogeneration. The turbine drives a generator while the exhaust gases, which are generally in excess of 400 -500°C, are routed to a heat recovery steam generator (HRSG), where they are used to produce steam. In some cases the exhaust gases can be used directly, eliminating the need for a HRSG. A bottoming cycle cogeneration system is one in which the fuel is first used for some thermal processes, with the exhaust gases being the by-product that is used to produce power. Most cogeneration systems utilize a topping cycle.</p>

There are three main types of prime movers used as CHP plants: steam turbines, gas turbines and internal combustion engines.

Gas turbines have captured the largest share of the recent cogeneration market. Typical gas turbines applications range from a few hundred kW to 500 MW. Nowadays, combustion turbines are commercially available in packages ranging from 200 kW to more than 150000 kW. Those plants have been applied to both base loaded and peaking application and provide a number of benefits, including relatively small size, high temperature recoverable heat, high reliability and availability, and relatively low cost maintenance. Much of their success in the cogeneration industry is a result of low initial costs, high availabilities, excellent and low-cost maintenance characteristics, fuel-switching capabilities, high-quality heat that can be simply recovered and high efficiencies in large sizes.

Gas turbines concepts are simple as compared to other technologies. The simplest open-cycle system operation consists on three major components and operates through a Brayton cycle. Gas turbine cogeneration plants are becoming more popular in part particularly of their optimum heat/power ratio of around 3:1. CHP plant can now be run with the philosophy of matching the demand for heat, and exporting excess power to help with economics of the plant. This concept will be also used at the Student City. A prime mover (motor) as it is gas turbine with a lower heat/power ratio will help in this concept. A gas turbine used for CHP would normally be fuelled by natural gas and diesel as preferred fuels, but gasified heavy fuel oil can be used as well.


Internal Combustion Engines. All internal combustion engines operate in the same way when acting as CHP units; power is used to drive a generator and heat is recovered from the engine exhaust, jacket water and lubricant oil. The size range is enormous: from the 15 kW diesel/natural gas units for use in the domestic/service consumers to 50 MW diesel units (or some time heavy fuel oil) for use in the industrial sector. The largest diesel units operate at heat/power ratios of around 1:1 whereas some other units can operates efficiently around 2:1. Additionally, reciprocating engines are extremely efficient in sma ll sizes, are available over a broad range of sizes ranging from tens of kW to 50 MW, can be fired on a broad variety of fuels and have excellent availability. As a result, they have been used in a numerous cogeneration systems serving residential, commercial, service, institutional and small industrial loads.

Steam-turbine-based power generation cycles have been the workhouse of the power generation industry. They are available in a broad range of sizes from a few hundred kW to more than 1000 MW. After many decades of focusing primarily on increasing system size, the turbine industry has recently turned towards increasing efficiency and availability. Because of their energy characteristics and the need to operate the steaming portion of the cycle, steam-turbine based systems have been used primarily for base loaded applications, with older plants being relegated to intermediate duty. Finally, because of the availability to extract steam at various ports throughout the expansion process, they allow for gr eater flexibility in matching cycle thermal capabilities with loads.


In order to know the DH & SSCHP Plant no special “know-how” technology is required apart from some training seminars organized at the different energy and environment Albanian institutions and at the consumer level for introducing and instructing also the ESCO Companies how to operate those plants.

## Volume of Potential reduction of GHG emissions

A reduction in the amount of pollutants follows the application of DH & CHP schemes coming from the more efficient conversion of fuels. Also, the more efficient use of exhausts gases in, say, a heat recovery steam (water) boiler, (where, if supplementary firing take place, the fuels are more completely burned), will reduce pollution of greenhouse gases and acid rain gases. In the figures 20 & 21 are shown the expected reduction of greenhouse gases emissions and SO<sub>2</sub> & NO<sub>x</sub> ones from the penetration of DH & CHP Schemes, which are respectively 304.3 Million kg, 2330 thousand kg and 836.1 thousand kg in the year 2015. The estimated cost of GHG reduction is 5.27 cent/kg.

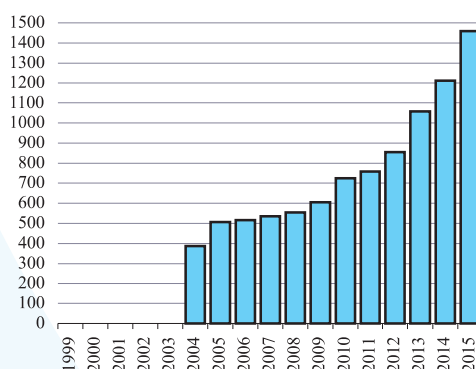

**Figure 20:** GWP reduction from the introduction of DH & CHP for industry, service and households sectors (1000000 kg)

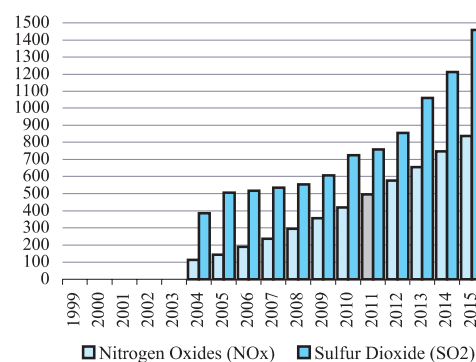

**Figure 21:** SO<sub>2</sub> & NO<sub>x</sub> reduction from the introduction of DH & CHP for industry, service and households sectors (1000 kg)

<b>Barriers</b>	<p>DH &amp; CHP is such an attractive proposition thermodynamically that many wonder why it is not used more widely in industrial service and blocks of multi store buildings, as these technologies are well known since many years ago. As we will analyze, the reasons are largely economic and relate to financial evaluation of capital investment. Detailed arguments are as follows:</p> <p>If an industry decides to invest in CHP plant then it is committed to a course of actions and expenditures for a number of years. The financial appraisal of such a project involves a number of assumptions on the future energy demands of company, fuel prices and availability, taxes, discount rates, maintenance costs, which may be accurate only in the short term.</p> <p>It may be safer for a consumer simply to purchase the electricity from national grid and generate heat from own boiler than to generate both of them from a CHP.</p> <p>Any change in consumer behavior may result in a later demand for more/less heat or power, which on the other hand requires more plants at a cost much higher than the initial installation.</p> <p>Any CHP plant design will include a provision for back-up to ensure security of supply for heat and electricity. Any support plant can only be regarded as spare capacity, which, by definition, will not be frequently used, and therefore will not generate sufficient savings to offset the initial capital costs.</p> <p>Apart from the capital costs of the prime power motor, there are large costs associated with the distribution of heat in pipelines. These costs may be a significant part of the initial investment unless the heat user is relatively near prime power motor.</p>
-----------------	--




<b>Project 3</b>	<b>Introducing Solar Water Heater systems in households/service (public buildings), which use electricity, LPG and fuel wood as energy source to meet energy demand for space heating and air conditioning.</b>																																			
<b>Sector</b>	Energy																																			
<b>Objectives</b>	<p>The overall objective of the project is to increase the security of electricity and heat supply in Albania by promoting the least cost solution in supply side through installation of Solar Water Heater Systems in households sectors (private buildings) and service (public).</p> <p>The immediate objective of this project is to enable the various Albanian Stakeholders to take decisions regarding potential projects in solar water heater systems in public and private building stock.</p> <p>Other related objectives are:</p> <ul style="list-style-type: none"> <li>▪ Significant increases of the investment in utilization of solar energy in Albania's new private households and new public buildings to meet the demand for domestic hot water in households and service sectors;</li> <li>▪ Significant increase of energy supply security by utilization of renewable energy sources in general and solar energy in particular, which at same time will reduce GHG and acid rain gases and will be environment friendly;</li> <li>▪ Significant increases of bankable projects by utilization of renewable energy sources in general and solar energy in particular;</li> <li>▪ Improvement of data on the potential of renewable energy sources in general and solar energy in particular in different districts of Albania and evaluation of solar water heater systems market in households, public buildings and tourist hotels in Albanian coast line.</li> </ul>																																			
<b>Country</b>	Albania																																			
<b>Budget</b>	74 million USD																																			
<b>Project linkage to the national priorities</b>	<p>Climate change issue is seriously addressed in the National Energy Strategy which complements the National Strategy on Socio Economic Development (NSSD). Among other policies addressed in the National Energy Strategy is the promotion of the renewable energies and specifically the solar energy which is available in the country, especially in the coastal zone. In this regard, the proposed project is expected to contribute in the implementation of the energy strategy and definitely contribute to the attainment of the sustainable development and Millennium Development Goals/Goal 7. Also, the project will contribute to meet the Albania's commitments as a Party under the UNFCCC.</p>																																			
<b>Description</b>	<p>The energy consumption of the households and service sectors is divided into four parts described as much basic energy uses with widely differing characteristics: space heating, water heating, cooking, lighting and electrical appliances. Residential sector occupies the second place in the consumption of energy resources in the country. As a consequence, it is important to know the consumption of electricity, fuel woods, LPG and kerosene for each service. Up to 1990, the energy supply and demand for space heating, cooking and hot water preparation (using mostly fuel woods) remained in balance. After 1990, there was a massive decline of fuel woods supply from forest to residential zones. This resulted in a massive cutting of fuel woods (most illegal) and an overload of electricity equipment (substations, transmission and distribution lines). Environmental effects resulting from earth erosion due to massive cutting were of large sizes.</p> <p>In order to calculate the needs for hot water it was considered the quantity of sanitary water needed for one person per day for different services: shower, laundry dishes, etc. The main demand will be met by electricity with 70% in 2015 followed by fuel woods and LPG in the passive scenario. The estimates show that solar energy will have a small increase, contributing with 4% in 2015.</p> <p>Albania has a considerable potential for the exploitation of the solar energy due to the high number of sunshine hours and high values of solar radiation (see chapter 1, energy sector, and section 1.1.2.6). The NAE and EEC have carried out a number of studies for installing solar panels in both residential and service sector. Albanian citizens have started installing solar panels for hot water promoted repeatedly by the EEC through various awareness campaigns. If the solar panel systems in Albania had been developed similarly with that in Greece, the potential production of hot water would have been equal with the energy amount of 360 GWh<sub>th</sub> (or 75 MW<sub>th</sub> of installed capacity). These figures correspond to a total surface of solar panels of 300 000 m<sup>2</sup> (or 0.3 m<sup>2</sup>/family), while the solar panel penetration in countries such as Israel and Greece is actually greater than 0.45 m<sup>2</sup>/family.</p> <p>For many reasons penetration was foreseen to be different in different zones of the country. Three zones are taken into consideration already divided according to the level of intensity and solar radiation duration. The largest effects of this measure are evidenced in Zone I where the intensity is higher and the time period of solar radiation is longer. Table 4 shows the data for penetration of solar energy use according to respective zones in households. Penetration norms of solar panels have been selected based on the experience of neighboring countries such as Greece and Turkey that after 30 years of experience have managed to provide at national level the production of hot water in values of 80-85%.</p> <table border="1"> <caption><b>Table 4: Main indicators of installing double glass windows analysis</b></caption> <thead> <tr> <th colspan="2">Name</th><th>% of penetration of SWHS in 2015</th><th>Total saving ktoe</th><th>Unit cost \$/kWh</th></tr> </thead> <tbody> <tr> <td rowspan="2">Zone I</td><td>Urban</td><td>20</td><td>6.8</td><td>0.065</td></tr> <tr> <td>Rural</td><td>15</td><td>1.7</td><td>0.042</td></tr> <tr> <td rowspan="2">Zone II</td><td>Urban</td><td>15</td><td>1.8</td><td>0.085</td></tr> <tr> <td>Rural</td><td>10</td><td>1.2</td><td>0.062</td></tr> <tr> <td rowspan="2">Zone III</td><td>Urban</td><td>10</td><td>0.8</td><td>0.096</td></tr> <tr> <td>Rural</td><td>8</td><td>0.3</td><td>0.084</td></tr> </tbody> </table>				Name		% of penetration of SWHS in 2015	Total saving ktoe	Unit cost \$/kWh	Zone I	Urban	20	6.8	0.065	Rural	15	1.7	0.042	Zone II	Urban	15	1.8	0.085	Rural	10	1.2	0.062	Zone III	Urban	10	0.8	0.096	Rural	8	0.3	0.084
Name		% of penetration of SWHS in 2015	Total saving ktoe	Unit cost \$/kWh																																
Zone I	Urban	20	6.8	0.065																																
	Rural	15	1.7	0.042																																
Zone II	Urban	15	1.8	0.085																																
	Rural	10	1.2	0.062																																
Zone III	Urban	10	0.8	0.096																																
	Rural	8	0.3	0.084																																


As indicated by the table, the unit cost to substitute one kWh of electricity is different for different zones. It should be emphasized that the forecasts for investments and saving have started in year 2004 and will terminate in 2015. Investments up to 2015 will save for many years after 2015, which was not reflected in Table 4 in value of unit cost that if taken into consideration would obviously result lower.

According to different studies done in our country and other countries experience, some of which with lower solar energy potentials compared to Albania, the use of solar energy for preparation of hot water is foreseen as a real possibility in the Active Scenario.

The use of solar panels for preparation of hot water is economically feasible, particularly in modern private services such as hotels, tourist centers, offices, etc, mainly in seashore and hilly areas where the potentials of the solar radiation are higher. Referring to the National Energy Strategy the objective for period 2000 -2015 is the installment of solar panel systems in order to provide 62.9 ktOE of energy in 2015.

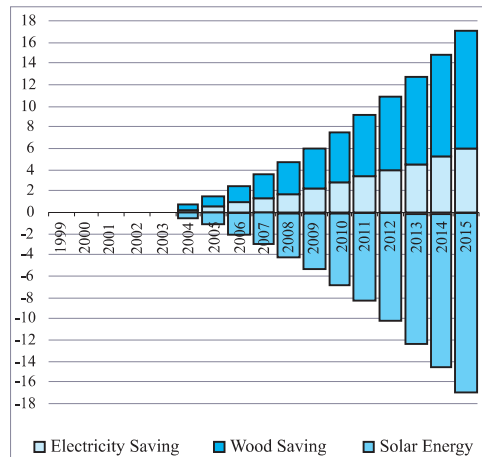

**Figure 22:** Energy produced by solar panels (wood and electricity savings) for preparation of DHW in Active Scenario for households (ktOE)

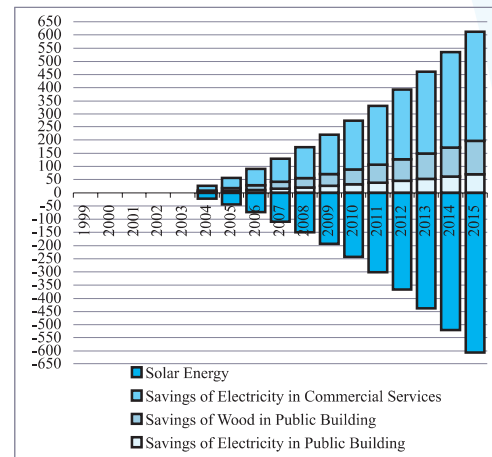

**Figure 23:** Energy produced by solar panels (wood and electricity savings) for preparation of DHW in Active Scenario for service sector (ktOE)

## Expected outputs

The main argument in favor of solar energy is that it enables an advantage to meet domestic hot water demand by substituting electricity and fuel wood. Other detailed specific benefits are:

- Increased energy security in general and electricity supply in particular by introducing solar water heater systems in service and households sectors;
- Increased share of the utilization of renewable energy sources in general and solar energy in particular in Albania;
- Reduced levels of GHG emissions and other environmental pollutants;
- Promoted investments and jobs created in service and households sectors by installation of solar water heater systems;
- Increased reliability of energy data on solar energy;
- Estimated investment needs and a cost benefit analysis for a short -term period (3 -5 years), and programs aiming at promotion of the installation of solar water heater systems;
- Trained stakeholders

## Stakeholders to be involved

NAE, the EEC, Ministry of Industry and Energy, Ministry of Environment, Ministry of Finance; various environmental and energy NGOs; various private installing companies of solar water heater systems (ESCO model);

In order to have good promotion of solar panels in different consumers is very important that solar panel suppliers provide a guaranteed service. Guaranteed service is the difference between a company that says, "We deliver quickly" and another that affirms, "we deliver within an hour, or you get your money back". A "guaranteed service" must fulfill 4 conditions:

- It should be simple to understand and be clearly defined;
- It should be easily put into practice;
- The guarantor should be able to insure his responsibility;
- Compensation in case of failure should be in proportion to the prejudice.

The need for domestic hot water should be determined carefully. It is determined by the average daily consumption for each month and is generally expressed in liter per day. So, there should be 12 monthly figures.

Hot water consumption figures for new buildings must be estimated from the following data:

- The number of people in a family;
- Number of showers per day;
- Use of hot water for other proposes;
- Amount of water (for shower, bath and so on) that runs from each tap;
- The required water temperature;
- The planned extensions.



In the existing buildings, daily consumption should be measured over a period of at least two months. If necessary, a water meter should be installed on the pipe leading to the existing water heater. This meter will be re-used for monitoring the solar installation. The chosen months should be representative of annual requirements. In all cases, the water temperature will be the temperature of hot water distribution circuit fixed by the regulations.

The technical consultant generally requests serious guarantees from the different suppliers:

- A year guarantee, for the solar collectors;
- A year guarantee for the different water storage tanks;
- A two years total guarantee, covering all the other materials.

These guarantees refer to the maximum guarantees proposed by certain manufacturers. The installer can subscribe to a complementary insurance if it is considered to be necessary.

The maintenance contract for 3-4 years should be included in the construction work contract. In this way, all the expenses are covered throughout the period of the contract. In conclusion, the contract must offer 4 essential advantages:

- No financial risks; the user is guaranteed a certain annual energy supply and so the investment pay-back time is also guaranteed;
- No breakdown worries; the user is not troubled by the system failure. Not only are repairs and maintenance guaranteed, but it is also in the interest of the "technical pool" to carry out the repairs as quickly as possible;
- Easy bank loans; the absence of financial risks makes it much easier to borrow the money needed for investment costs; Preferential funding; subsidies for collective solar installation are now linked to guaranteed performance.


## Reduction potential of GHG emissions

It is true that Southern Europe receives more sunshine than the North. But in reality the variations are less important than generally believed. The productivity of a solar system is indirect relationship to the insolation. But other factors can also help in saving conventional energy. For example, a solar installation as a back up during the winter and work alone in summer. In this way, the conventional energy boiler will only be used during the period of the year when space heating is needed and its efficiency is at its best. Moreover, the use of a solar energy is one of the best ways of limiting the emission of carbon dioxide and its effects on global warming. The reduction of CO<sub>2</sub>, brought about by the use a solar system, depends on the source of the energy that replaces. A solar collector with an area of 1 square meter, installed near the Mediterranean (as our country), can reduce CO<sub>2</sub> emissions by the following amounts every year.


- 440 kg, if the replaced energy is fuel oil (50 % conversion efficiency);
- 195 kg, if the replaced energy is gas (75% conversion efficiency);
- 380 kg, if the replaced energy is electricity (with a 50% nuclear contribution).

These figures are far from being negligible and if one considers that, in the Southern European countries every other domestic water heater could eventually be solar (as in Cyprus already), the total emission of CO<sub>2</sub> could be reduced by nearly 10% in these countries.


A reduction in the amount of pollution follows from the utilization of solar energy. In the figures 26, 27 and 28 are shown the reduction of green houses gas emissions and SO<sub>2</sub> & NO<sub>x</sub> from the penetration of thermal insulation measure. As it is indicated in the figure the amount of reduction for GHG, SO<sub>2</sub> and NO<sub>x</sub> will be respectively 240.98 Million kg, 1198.96 thousand kg and 661.98 thousand kg in the year 2015. The cost of GHG reduction is 4.32 cent/kg.

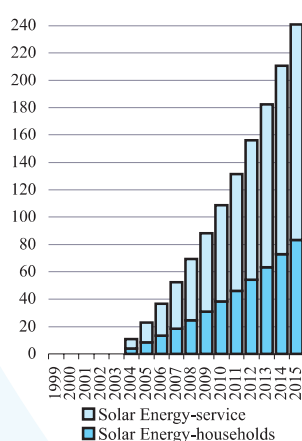

**Figure 26:** GHG reduction from the introduction of solar energy measure (1000000 kg)

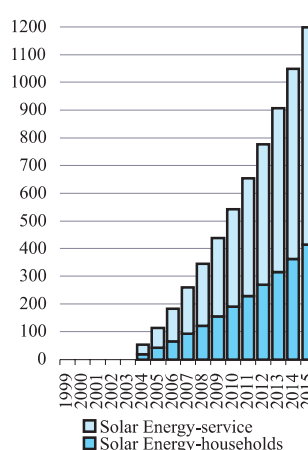

**Figure 27:** SO<sub>2</sub> reduction from the introduction of solar energy measure (1000 kg)

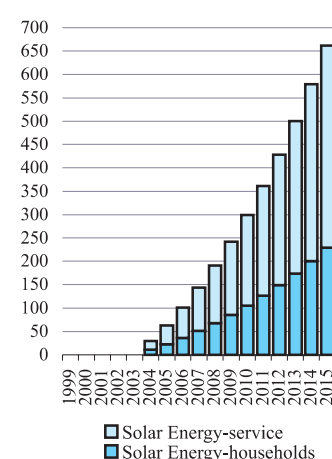

**Figure 28:** NO<sub>x</sub> reduction from the introduction of solar energy measure (1000 kg)

<p><b>Barriers</b></p>	<p>Most of the barriers regarding solar energy are identified through surveys carried out concerning the installation of SWHS. The interviewed group was not selected completely in random manner, because the team knew that would have been differences in the answers. Hence, the team decided to choose 500 families and service consumers in Tirana city and they were chosen based on the idea to have a right share of different kinds of dwellings: individual houses, old apartments, new apartments and new villas. Questions asked and results of the survey are as following:</p> <p><i>Does your building has 24 hrs./day running cold water supply?</i></p> <p>The main scope of this question is to know if their buildings have 24 hrs./day running cold water supply. The processing of data received from analysis of questionnaires indicates that 65.1% of them have around the clock can water supply. The second group is 34.9% (174 from 500 interviewees). They declare that in their buildings have not 24 hrs./day running cold water supply.</p> <p>A major conclusion results from this analysis: that only 2/3 of interviewees have 24 hrs./day running cold water supply and this number is decreasing year by year due to lack of investments in the water supply network. This is a big obstacle related with the installation of SHW. If 24 hrs./day running cold water supply doesn't exist it will not be possible to have the utilization of solar energy.</p> <p><i>If yes, from where are you supplied?</i></p> <p>In the analysis performed resulted that 65.1% of the buildings in Tirana city have 24 hrs./day running cold water supply. Immediately after this observation, naturally is asked the other question: <i>From where are they are supplied?</i> From elaboration of the survey data results that 54.2% declared they are supplied from their own reservoirs. From the water supply point of view this is a very bad panorama since it is telling us that the Albanian consumers have lost their trust in the Water Supply Company. To have running water supply 24 hrs./day Albanians are investing in the worst way: a reservoirs for each family.</p> <p>A second group was interviewed afterwards. The second group is the one supplied by the main network of the Tirana City. This group consists of the 37% of the total interviewees and the third group are the families and the businesses, which are supplied by their own well. The questions asked to them are the following:</p> <p><i>How do you prepare Domestic Hot Water (DHW) for daily needs?</i></p> <p>Albanian families and some service sectors are using electric boilers in most of the cases for preparing DHW. This group consists of 68.34% of all interviewees. In the second group families (15.53%) using electric appliances for DHW supply are included.</p> <p>Based on this important conclusion, it is clear that Albanians are using electricity (85%) for preparing hot water for their daily needs. This figure puts the Albanian Power System in a very bad situation, because almost all this electric water boilers are plugged in during the peak time. This is another reason that explains why our power system can not supply consumers with electricity during the period of peak time. Also, it should be mentioned that firewood and kerosene actually have almost lost their dominant position and a new energy source, the solar energy is now present in use in Albanian energy market.</p> <p><i>Do you know that the installation of a Solar Water Heating System in Your building will bring energy saving to you, will protect the Power System from its continuous destruction and will protect the environment?</i></p> <p>As known worldwide, the utilization of solar energy brings important advantages to the Albanian Power System in the area of: a better energy supplied, reduction of imported fuels, and protection of environment. Having this in mind we wanted to know if the interviewees knew the forementioned advantages.</p> <p>The conclusion coming out from the answers distribution analysis is: 79.2% of the interviewees have declared Yes i.e. they know that the installation of a Solar Water Heating System in Your building will bring energy saving to You, will protect the Power System from its continuous destruction and will protect the environment.</p> <p><i>Do you think that the installation of a Solar Water Heating System in Your building is feasible compare with other traditional techniques for preparing the Domestic Hot Water?</i></p> <p>From the data processing resulted that 47.2% of the interviewees think that the installation of a Solar Water Heating System in their building is very feasible compared to other traditional techniques for preparing the Domestic Hot Water. This is very important and tells us the right message of the households and service consumers. Also, the interviewees group who are thinking that the installation of solar panels is a feasible investment is not a small one, it includes 21.8%.</p> <p>The biggest second group (22.4%) is composed of the interviewees who think that the installation of a Solar Water Heating System in their building is not feasible compared with other traditional techniques for preparing the Domestic Hot Water. The conclusion is that much more information is needed on the advantages of utilization of solar collector systems.</p>
------------------------	--

## LAND USE CHANGE AND FORESTRY

<b>Project 1</b>	<b><i>Identification of demand and supply for firewood in rural areas</i></b>
<b>Sector:</b>	Land Use Change and Forestry
<b>Objective:</b>	Reduction of the uncontrolled cutting of forest trees in rural areas, which in turn would contribute to a better management and enhancement of the sink capacity of forests in the future.
<b>Country:</b>	Albania
<b>Budget:</b>	0.110 million US \$
<b>Project linkage to national priorities</b>	The proposed project is expected to contribute to the attainment of the sustainable development and Millennium Development Goals/Goal 7. In the meantime, the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Background:</b>	Each year 298 690 hectares of forest area are pruned, from which high stem forests 93 890 hectares, coppice forests 83 040 hectares and shrubs 121 760 hectares. Data on illegal cutting of trees for firewood are not reported anywhere The average annual increment is reduced to 0.5 m <sup>3</sup> /hectare/year.
<b>Expected outputs:</b>	<p>The expected project outputs:</p> <ul style="list-style-type: none"> <li>▪ Evaluation of the forest biomass demand for energy purposes.</li> <li>▪ Evaluation of the forest biomass supply for energy purposes</li> </ul>
<b>Stakeholders:</b>	General Directorate of Forests and Pastures; Ministry of Agriculture and Food; Livestock Research Institute; Ministry of Energy and Industry; Ministry of Environment; National Energy Agency; Forest and Pastures NGOs; Private companies interested in forest activities; etc
<b>Required Technologies:</b>	Survey techniques to estimate the forest trees cut for energy purposes. Training of experts on data collection and processing.
<b>Volume of Potential Reduction of GHG Emissions:</b>	Not Applicable

<b>Project 2</b>	<b><i>Integrate climate change concerns and sustainable development into the Forest Management Strategies and plans.</i></b>
<b>Sector</b>	Land Use Change and Forestry
<b>Objectives</b>	The overall objective of the project is to increase the sink capacity and decrease the level of GHGs emissions from Albanias forests through integration of climate change concerns and sustainable development into the Forest Management Strategies.
<b>Country</b>	ALBANIA
<b>Budget</b>	9.525 million USD
<b>Project linkage to national priorities</b>	The proposed project is expected to contribute to the attainment of the sustainable development and Millennium Development Goals/Goal 7. In the meantime, the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Background</b>	Most of the national sector development strategies whene ver they exist, do not integrate principles of sustainable development and particularly environmental concerns. Exception is made in the National Energy Strategy where principles of sustainable development are highly addressed. Climate change issue is not yet explicitly addressed in the Forest Strategies and Plans). Having the impact of LUCF category to the overall GHG emissions and sinks, the need to apply policies and measures for GHG mitigation in the LUCF sector is becoming more evident. The Forest Management Strategies and Plans must consider and take into account the expected climate changes and foresee policies and measures in order to mitigate the GHG emissions released from LUCF activities.
<b>Expected outputs:</b>	<p>The expected project outputs:</p> <ul style="list-style-type: none"> <li>▪ Climate change concerns integrated into the national policy and planning of the LUCF sector;</li> <li>▪ Sustainable development principle integrated into the national policy and planning of the LUCF sector;</li> <li>▪ Mitigation of GHG emissions from LUCF category;</li> <li>▪ Enhancement of sink capacity;</li> <li>▪ Sustainable Forest Management practices developed;</li> <li>▪ Optimum land use scenarios developed;</li> <li>▪ Scenarios for the sustainable forest management developed;</li> <li>▪ Reliability of LUCF data increased;</li> <li>▪ National capacities to address climate change concerns into national planning and policy developed.</li> </ul>
<b>Stakeholders</b>	General Directorate of Forests and Pastures; Ministry of Agriculture and Food; Livestock Research Institute; Ministry of Tourism; Forest and Pastures NGOs; Private companies interested in forest activities; etc.
<b>Required Technologies:</b>	Geographical Information System (GIS) equipment; ARCHINFO soft-ware and Land Analysis Laboratory equipment; the current and processed climatic data system; current situation of land use, forests, agriculture, population (agegroups, education levels, professions, emigration, traditions, desires, needs, etc.), used technologies. Also, training of the experts in Forestry, Pasture, Agriculture, Livestock husbandry and Tourism on Sustainable Forest Management practices is required.
<b>Reduction Potential of GHG Emissions:</b>	A reduction of emissions and enhancement of sinks, respectively by 1 085.00 ton/year and 1 861.000 ton/year is expected.

<b>Project 3</b>	<b><i>Reforestation of an area of 100 000 ha on refused agriculture lands, using more capable species to absorb the CO<sub>2</sub> and fast-growing species</i></b>
<b>Sector:</b>	Land Use Change and Forestry
<b>Objective:</b>	Increasing the forest in Albania and in turn the sink capacity of forests.
<b>Country:</b>	ALBANIA
<b>Budget:</b>	102.005 million US \$
<b>Project linkage to national priorities</b>	The proposed project is expected to contribute to the attainment of the sustainable development and Millennium Development Goals/Goal 7. In the meantime, the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Description:</b>	There are about 100 000 hectares of arable land that has remained undistributed to farmers or private owners composed of refused lands or unused for crops cultivation. The land is distributed among all districts of the country. This land needs to be converted by using the techniques of reforestation.
<b>Expected outputs:</b>	<p>The expected project outputs:</p> <ul style="list-style-type: none"> <li>■ Forest area increased by 100 000 hectares</li> <li>■ Increased annual increment by 4.0-6.0 m3/hectare/year</li> <li>■ Sink capacity of forests enhanced</li> <li>■ Protection against erosion in mountainous hill zone and flooding in plane zone enhanced</li> </ul>
<b>Stakeholders:</b>	General Directorate of Forests and Pastures; Ministry of Agriculture and Food; Livestock Research Institute; Communes, Ministry of Tourism; Forest and Pastures NGOs; Environmental NGOs; etc .
<b>Required technologies:</b>	Modern seedling cultivation system (Green House Cultivation System). Trained experts.
<b>Reduction Potential of GHG Emissions:</b>	An increase of sink capacity up to annual average 337 000 to n/year by the year 2020 and 964 000 ton/year after.

<b>Project 4</b>	<b><i>Monitoring of fire situation to assess the more threatened forest areas from climate change point of view and the desertification scale due to fires</i></b>
<b>Sector:</b>	Land Use Change and Forestry
<b>Objective:</b>	The overall objective of the project is to increase the sink capacity of forests and decrease the level of GHGs emissions through monitoring of the fire situation in Albanias forest.
<b>Country:</b>	ALBANIA
<b>Budget:</b>	1.460 million USD
<b>Project linkage to national priorities</b>	The proposed project is expected to contribute to the attainment of the sustainable development and Millennium Development Goals/Goal 7. In the meantime the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Background</b>	Albania, as Mediterranean country with a very hot summer season, is exposed to a high risk of fires in forests which can disappear or desert considerable forest and pasture areas. This risk is expected to become higher due to expected climate changes. Referring to the current data on forest fires, during last years increased numbers of burned forest areas are observed. Therefore, the amount of GHG emissions released due to this phenomenon is increased and the sink capacity is decreased too.
<b>Expected outputs:</b>	<p>The expected project outputs:</p> <ul style="list-style-type: none"> <li>▪ Higher levels of GHGs emission reduction</li> <li>▪ Higher forest sink capacity</li> <li>▪ Higher operation effectiveness of the forest services against fires</li> <li>▪ Correlation between forest fire situation and climate change found.</li> <li>▪ Scenarios of future forest fire situation developed.</li> </ul>
<b>Stakeholders:</b>	General Directorate of Forests and Pastures; Ministry of Agriculture and Food; Livestock Research Institute; Forest service against fires; Communes, Ministry of Tourism; Forest and Pastures NGOs; Private companies interested in forest activities; etc
<b>Required Technologies:</b>	Geographical Information System (GIS) equipment, monitoring equipment and training of experts on fire monitoring systems.
<b>Reduction Potential of GHG Emissions:</b>	<p>The expected reduction of GHGs emissions is as following:</p> <ul style="list-style-type: none"> <li>▪ Reduction of CO<sub>2</sub> emissions from -129.14 Gg to -1.32 Gg.</li> <li>▪ Reduction of CH<sub>4</sub> emissions from 0.28 Gg to 0.01 Gg.</li> <li>▪ Reduction of CO emissions from 2.53 Gg to 0.09 Gg.</li> <li>▪ Reduction of NO<sub>x</sub> gas emissions from 0.07 Gg to 0.00 Gg.</li> </ul>



## AGRICULTURE

<b>Project 1</b>	<b><i>Use of low cost bio-digesters for the manure processing in the farming system of Albania</i></b>
<b>Sector:</b>	Agriculture
<b>Objective:</b>	Promote the efficient use of manure in the farming system of Albania and bring additional advantages to farmers through the methane recovery and its potential use for cooking and heating purposes .
<b>Country:</b>	Albania
<b>Budget:</b>	2 million USD
<b>Project linkage to national priorities</b>	The proposed project is expected to contribute to the attainment of the sustainable development and Millennium Development Goals/Goal 7. In addition the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Background:</b>	The project will introduce the aerobic digesti on technology in the farming practice of Albania through the use of low cost plastic bio -digesters at the farm level. The bio -digesters make use of cheap polyethylene tubular films. It is estimated that the cost for each device would be approximately 28 USD.
<b>Expected outputs:</b>	The implementation of this technology in the farming system of Albania is expected to bring additional advantages to the farmers in terms of production of methane gas for cooking as well as effluents to fertilize ponds for fish, aquatic plants and crops.
<b>Stakeholders:</b>	Ministry of Agriculture and Food; Livestock Research Institute; Ministry of Energy and Industry; Ministry of Environment; National Energy Agency; Forest and Pastures NGOs; Private companies interested in forest activities; etc .
<b>Required Technologies:</b>	No special know -how technology is required apart from some field seminars organized at the farm level for introducing and instructing the farmers how to operate the plastic bio-digesters.
<b>Volume of Potential Reduction of GHG Emissions:</b>	An additional 10 -15% of methane release reduction is expected upon the completion of the proposed project.

<b>Project 2</b>	<b><i>Industrial production of nutrient blocks for livestock feeding</i></b>
<b>Sector:</b>	Agriculture
<b>Objective:</b>	Promote the improvement of feed digestibility in ruminants by bringing additional feed supplements in their diet
<b>Country:</b>	Albania
<b>Budget:</b>	1.8 million USD
<b>Project linkage to national priorities</b>	The proposed project is expected to contribute to the attainment of the sustainable development and Millennium Development Goals/Goal 7. In addition the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Background:</b>	The projects purpose is the establishment of a production line for the manu facturing of urea molasses blocks to be used as feed additives by ruminants. The blocks will be consequently distributed (sold) to the farmers, which will be instructed about the modalities of their use for feeding the animals.
<b>Expected outputs:</b>	The implementation of this technology in the farming system of Albania is expected to bring additional advantages to the farmers in terms of weight gain for their animals and increased production in general.
<b>Stakeholders:</b>	Ministry of Agriculture and Food; Livestock Research Institute; Ministry of Energy and Industry; Ministry of Environment; National Energy Agency; Forest and Pastures NGOs; Private companies interested in forest activities; etc
<b>Required Technologies:</b>	No special know -how technology is required apart from some field seminars organized at the farm level for introducing and instructing the farmers how to use the nutrient blocks as feed additives in their animals.
<b>Volume of Potential Reduction of GHG Emissions:</b>	An additional 15 -20% of methane rel ease reduction is expected upon the completion of the proposed project

## WASTE

<b>Project 1</b>	<b><i>Construction of sanitary landfills for the urban solid waste management</i></b>
<b>Sector:</b>	Waste management
<b>Objective:</b>	GHG mitigation and management of urban solid waste through the economically viable method of sanitary landfills.
<b>Country:</b>	Albania
<b>Budget:</b>	USD Million 1,5 – 2
<b>Project linkage to national priorities</b>	The project idea is in line of the National Waste Management Plan and revised NEAP and many other policy papers of the Ministry of Environment, which in turn contribute to the achievement of the MDG #7, namely Environmental Sustainability. In addition, the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Background</b>	Urban waste in Albania is simply discharged. The dumping sites are practically the only disposal system for <i>urban solid waste</i> adopted in Albania. These disposal plants dont have any drainage system as regards the percolation effect or efficacious compacti ng systems. The technologies used for the final disposal of urban solid waste do not include differentiation of waste and methane recovery systems. Existing landfills (actually simple dumpsites) do not have a system to protect groundwater against the leaching of hazardous substances
<b>Expected outputs:</b>	<ul style="list-style-type: none"> <li>Environmental pollution from urban solid wastes monitored and controlled</li> <li>GHG emissions reduced</li> </ul>
<b>Stakeholders:</b>	Ministry of Public Works and Tourism; Ministry of Environment; Ministry of Local Authorities and Decentralization; Municipalities
<b>Required Technologies:</b>	The technology to be applied consists in that of sanitary landfills. They are supplied with the necessary waterproof protection as for percolations in the soil, include methane recovery systems and the final covering layer. Landfills often comprise several successive infield phases of permitted waste, which are spread, compacted and covered daily with earth. Principal site liner containment components include natural/or synthetic plastic materials, wit h soil protection layers above and beneath, a porous leachate drainage layer and a top.
<b>Volume of Potential Reduction of GHG Emissions:</b>	This method of waste disposal will reduce the quantity of CH <sub>4</sub> from 38.15 Gg to 31.57 Gg CH <sub>4</sub> expected by 2010.

<b>Project 2</b>	<b><i>Construction of municipal solid waste incinerator with energy recovery in Tirana city</i></b>
<b>Sector:</b>	Waste management
<b>Objective:</b>	GHG mitigation and management of municipal sold waste through introduction of modern technology for the incineration of urban solid waste with energy recovery.
<b>Country:</b>	Albania
<b>Budget:</b>	USD million 25
<b>Project linkage to national priorities</b>	The project idea is in line of the National Waste Management Plan and revised NEAP and many other policy papers of the Ministry of Environment, which in turn contribute to the achievement of the MDG #7, namely Environmental Sustainability. In addition, the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Background</b>	Urban waste in Albania is simply discharged. The dumping sites are practically the only disposal system for <i>urban solid waste</i> adopted in Albania. These disposal plants dont have any drainage system as regards the percolation effect or efficacious compacting systems. The technologies used for the final disposal of urban solid waste do not include differentiation of wastes and methane recovery systems. Existing landfills (actually simple dumpsites) do not have system to protect groundwater against the leaching of hazardous substances
<b>Expected outputs:</b>	<ul style="list-style-type: none"> <li>▪ Environmental pollution from urban solid waste monitored and controlled;</li> <li>▪ GHG emissions reduced;</li> <li>▪ Methane generated utilized for energy purposes.</li> </ul>
<b>Stakeholders:</b>	Ministry of Public Works and Tourism; Ministry of Environment; Ministry of Industry and Energy; Ministry of Local Authorities and Decentralization; Municipalities.
<b>Required Technologies:</b>	The required technology is that of incinerator. Equipment will be imported. It is expected the plant to treat about 200 tons daily. That would be able to reach the limit of the economic profitability for an incineration plant.
<b>Volume of Potential Reduction of GHG Emissions:</b>	This method of waste disposal will reduce the quantity of CH <sub>4</sub> from 66 917 Gg to 41 02 Gg CH <sub>4</sub> expected by 2010.

## INDUSTRIAL PROCESSES

<b>Project 1</b>	<b><i>Steel production by using the stock of scraps</i></b>
<b>Sector:</b>	Industry
<b>Objective:</b>	Reduction of GHG emissions and cost of production by using the stock of scrap as raw material for steel production
<b>Country:</b>	Albania
<b>Budget:</b>	1.5 million US \$
<b>Project linkage to national priorities</b>	The proposed project is expected to contribute to the implementation of the national strategy of industry and attainment of the sustainable development and Millennium Development Goals/Goal 7 and Goal 1. In the meantime, the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Expected outputs:</b>	<ul style="list-style-type: none"> <li>▪ Monitoring and control of environmental pollution owing to avoidance of the process of minerals elaboration;</li> <li>▪ A long-term sustainable option in consistency with national development goals;</li> <li>▪ A good quality of steel produced, a lower cost production and an improvement of the employment level in Elbasan region;</li> <li>▪ Scraps exploited from different sources in the country due to the closure of industrial factories.</li> </ul>
<b>Stakeholders:</b>	Ministry of Public Works and Tourism; Ministry of Environment; Ministry of Local Authorities; Municipalities.
<b>Required Technologies:</b>	No special know -how technology is required .
<b>Volume of Potential Reduction of GHG Emissions:</b>	An additional of 10 - 20% of CO <sub>2</sub> and CO release reduction is expected upon the completion of the proposed project.

<b>Project 2</b>	<b><i>Use of hermetic technologies for cement production</i></b>
<b>Sector:</b>	Industry
<b>Objective:</b>	Reduction of GHG emissions released from cement production activities through enhancement of efficiency of production in the stock of cement factories.
<b>Country:</b>	Albania
<b>Budget:</b>	2.3 million US \$
<b>Project linkage to national priorities</b>	The proposed project is expected to contribute to the implementation of the national strategy of industry and attainment of the sustainable development and Millennium Development Goals/Goal 7 and Goal 1. In the meantime, the project will contribute to meet the Albanias commitments as a Party under the UNFCCC.
<b>Expected outputs:</b>	Amelioration of the pollution indexes introduced basically in the cement production process, which can be achieved through: <ul style="list-style-type: none"> <li>▪ The preparation of the base mixture through a mixing system;</li> <li>▪ Full computerization of the production regime;</li> <li>▪ Change of the technology from horizontal to vertical hermetic systems, introducing cleaning systems of technologic gases;</li> </ul> The simultaneous production of the cement with betonies.
<b>Stakeholders:</b>	Ministry of Public Works and Tourism; Ministry of Environment; Ministry of Local Authorities; Municipalities
<b>Required Technologies:</b>	The project will introduce the updated technology of cement production through the change of the basic technology from horizontal to vertical and total computerization of the production system. An example might be the German experience in this field.
<b>Volume of Potential Reduction of GHG Emissions:</b>	An additional of 120% of CO <sub>2</sub> release reduction is expected upon the completion of the proposed project.



## CLIMATOLOGY

<b>Project 1</b>	<b><i>Establishment of meteorological automatic station network for measurement and transmission of meteorological data.</i></b>
<b>Sector</b>	Climatology
<b>Objective</b>	Use of new technologies to measure and transmit meteorological data.
<b>Country</b>	Albania
<b>Budget</b>	0.5 million USD
<b>Description</b>	Meteorological automatic station is relatively a new technology of measurements and transmission of meteorological data. Data collection of meteorological elements by automatic stations will provide information in real time, which is very useful, on the prediction of floods and inundation of agriculture land. Their number and distribution over the country depends on a few factors, most important among them is the meteorological representation of the places where the station will be installed as well as the cost needed to establish this network. This information will be used more effectively in the weather and hydrological forecast, especially in floods prediction, etc.
<b>Expected outputs</b>	Data collection of meteorological elements (atmospheric pressure, air temperature and relative humidity, sunshine radiation, atmospheric precipitations, the wind direction and speed) by the automatic stations will provide information in real time, which is very useful, on the prediction of floods and inundation of agriculture land.
<b>Required Technology</b>	Automatic stations with all the elements mentioned
<b>Adaptation potential</b>	High

<b>Project 2</b>	<b>Satellite remote sensing</b>
<b>Sector</b>	Climatology
<b>Objective</b>	Use of satellite remote sensing technology to acquire and process information of environmental data.
<b>Country</b>	Albania
<b>Budget</b>	Cost unknown exactly
<b>Description</b>	<p>Remote sensing technology refers to the techniques and methods used to acquire and process information about an object to be observed and studied, without getting physically in touch with it.</p> <p>The analyses of remote sensed data allows, for instance, the identification and classification of significant environmental parameters such as water surface temperature, sea and land surface color, sea and land roughness etc.</p> <p>The remote sensing technology is the best but very expensive alternative.</p>
<b>Expected outputs</b>	As far as meteorology and climatology are concerned, remote sensing data have helped spawn a revolution and enabled a better understanding and knowledge on the climate dynamics and its evolution. For instance, remote sensing allows high frequency control of cloud patterns, assessment of temperature and moisture profiles, precipitation estimation, wind determination over the ocean and in atmosphere, etc.
<b>Required Technology</b>	Remote sensing technology, thus contributing to the effective understanding of environmental conditions and changes.
<b>Adaptation potential</b>	High

## HYDROLOGY

<b>Project 1</b>	<b><i>WOISA - Water Observation and Information System in Albania</i></b>
<b>Sector</b>	Hydrology
<b>Objective</b>	Provision of scientists, researches and end-users dealing with the Global Change with real-time-data on the quantity and quality of Albanias water resources through promotion of the Water Observation and Information System
<b>Country</b>	Albania
<b>Budget</b>	0.5 million USD
<b>Description</b>	<p>In order to assess water resources, their spatial and temporal variability influenced by the Global Climatic and Environmental Change and by human activities, it is necessary to improve the studies concerning:</p> <ul style="list-style-type: none"> <li>Hydrological cycle mechanisms;</li> <li>Environment and its evolution under human influence;</li> <li>Water use.</li> </ul> <p>To facilitate these studies, hydrologists, meteorologists, agronomists, ecologists etc. must establish opened and updated knowledge database and information systems.</p> <p>The project will ensure the real time data flow and availability of historical information on water resources and their related environment to local and international community.</p>
<b>Expected outputs</b>	Database and information system of hydrological elements (precipitation, river stage, discharge, water quality parameters etc) will provide information in real time and historical data, which are useful for the warning and forecast of floods and flooding of agriculture land, water use for hydro-energy production and other end users.
<b>Required Technology</b>	A hydrological automatic station with all the elements mentioned above
<b>Adaptation potential</b>	High

<b>Project 2</b>	<b><i>Information system for an integrated and sustainable use of water resources in Drini River</i></b>
<b>Sector</b>	Hydrology
<b>Objective</b>	The main objective of the project is to offer knowledge database and associated tools for decision support to the scientific community and to decision-makers.
<b>Country</b>	Albania
<b>Budget</b>	0.6 million USD
<b>Description</b>	<p>The fact that 4 countries, Macedonia, Albania, Greece, Serbia and Montenegro including Kosovo, share this complex water system, makes more difficult a real hydrological analysis.</p> <p>This situation needs a good collaboration between researchers of the 4 countries and exchange of scientific information in order to create a Unique Database of this system.</p> <p>To date, data and information are dispersed between various institutions of each country</p> <p>Four main actions are proposed:</p> <ul style="list-style-type: none"> <li>■ establishment of an information system (IS) bringing together all geo -morphological, hydrological, meteorological and ecological data and related information (papers maps etc ) of Drini (Drin) region;</li> <li>■ implementation of a monitoring program (MP) on water quantity and quality parameters , which will provide in real time or close to real time the Information System;</li> <li>■ implementation of a web site and end-users interfaces.</li> </ul>
<b>Expected outputs</b>	<p>Information System</p> <p>The collection of all data and information available on water quantity and quality parameters, their checking and analysis, their storage and their dissemination to the partner teams of researchers can not be overlooked and must make up the basis of a multidisciplinary research work.</p> <p>All information concerning already published papers, maps etc. must be included into the information system. Geo-morphological data, digital elevation models, remote sensing Images and more generally all spatial data will be stored in the information system.</p> <p>The knowledge database must be available on the World Wide Web for researchers involved in the project as well as the public at large must have free access on a part of this data, information and products to use for awareness and pedagogical purposes.</p> <p>Specific tools must be adapted to the needs of the decision-makers.</p>
<b>Required Technology</b>	<p>The Project will support a well -coordinated monitoring program through the purchasing of monitoring equipment and the development of a monitoring system to monitor the quantity and quality of the waters of the Drini River.</p> <p>A hydrological automatic station with all the elements mentioned</p>
<b>Adaptation potential</b>	High

## AGRICULTURE

<b>Project 1</b>	<b><i>Use of vacuum packaging technology for the preservation of food products in Albania</i></b>
<b>Sector</b>	Agriculture
<b>Objective</b>	Improve the quality of food products in the market by combining cooling and freezing technology with the vacuum packaging.
<b>Country</b>	Albania
<b>Budget</b>	2 million USD
<b>Description</b>	The average increase of temperatures especially during the summer increases the risk of food spoilage as well. Therefore, additional measures are necessary to ensure the adequate preservation of food items. The implementation of the vacuum packaging technology for the preservation of food will reduce the food spoilage and ensure their proper storage on the market in combination with the cooling and freezing technology. The technology is particularly adequate for preventing food spoilage from aerobic bacterial strains and moulds, which can be additionally aggravated by the envisaged average temperature increase.
<b>Expected outputs</b>	The implementation of this technology in the food processing and marketing units of Albania will prevent the food spoilage and contamination, increase their shelf life, reduce losses associated to food deterioration and increase food safety for the consumers.
<b>Required Technologies</b>	A special vacuum packaging line needs to be installed inside a food processing or distribution center. Some short training periods might be necessary for the operators.
<b>Adaptation potential</b>	High

<b>Project 2</b>	<b><i>Implementation of thermal insulation system in the remodeling or building of livestock farm houses</i></b>
<b>Sector</b>	Agriculture
<b>Objective</b>	Provide environmental conditions to match the thermal requirements of animals in view of the envisaged increase of the average ambient temperatures.
<b>Country</b>	Albania
<b>Budget</b>	15 million USD
<b>Description</b>	Ensuring an adequate thermal balance during the livestock breeding cycle is of a primary importance for getting the expected production yields. Proper installation of perimeter insulation in the existing structures or in new buildings serves the purpose. In new farmhouses constructions it is advisable to make use of rodent-proof and waterproof insulating materials and if not available, to proceed with the incorporation of polyethylene vapor barriers and rodent control measures.
<b>Expected outputs</b>	The implementation of this technology in the farming system of Albania is expected to bring additional advantages to the farmers in terms of weight gain for their animals and increased production in general.
<b>Required Technologies</b>	Staff training can be necessary regarding the know-how of the properties and characteristics of the insulation materials, alternatives of insulation, how to make a choice, cost-benefit analysis etc.
<b>Adaptation potential</b>	High



## LAND USE CHANGE AND FORESTRY

<b>Project 1</b>	<b><i>Preparing of sustainable development projects for 10 districts.</i></b>
<b>Sector</b>	Land Use Change and Forestry
<b>Objectives</b>	Promotion of sustainable development of forests for 10 districts through the development of optimum land use and sustainable development scenarios.
<b>Country</b>	ALBANIA
<b>Budget</b>	3.025 million USD
<b>Description:</b>	There is no optimum land use plan for the Albanian coast or 10 coastal districts with a priority to develop the tourism, to adapt the forests according to the expected climate changes and to have the integrated and sustainable development with the other branches of economy.
<b>Expected outputs:</b>	Make the land use and sustainable development scenarios very important for decision-makers to decide on the development directions and to adapt the forests to the expected climate changes.
<b>Required Technologies:</b>	<ul style="list-style-type: none"> <li>▪ GIS equipments;</li> <li>▪ Training of 5 specialists.</li> </ul>
<b>Adaptation potential</b>	High

<b>Project 2</b>	<b><i>Study and experimentation on the best cultivation systems to adapt the forest to climate changes.</i></b>
<b>Sector</b>	Land Use Change and Forestry
<b>Objective</b>	Adaptation of cultivated systems to the expected climate changes through selection and utilization of the best cultivation systems.
<b>Country</b>	ALBANIA
<b>Budget</b>	0.14 million USD
<b>Description:</b>	There is no study and experiment to select the traditional cultivation systems and the agro-forestry cultivation systems.
<b>Expected outputs:</b>	Better cultivation systems applied in forests and in agriculture areas.
<b>Required Technologies:</b>	<ul style="list-style-type: none"> <li>▪ Importing of modern seedling cultivation systems;</li> <li>▪ Training of 2 specialists.</li> </ul>
<b>Adaptation potential</b>	High

<b>Project 3</b>	<b><i>The experimentation on rehabilitation of burned forest area</i></b>
<b>Sector</b>	Land Use Change and Forestry
<b>Objective</b>	Enhancement of adaptation capability of burned forests through experimentation of planting forest tree species that can better adapt to new conditions.
<b>Country</b>	ALBANIA
<b>Budget</b>	0.09 million USD
<b>Description</b>	Because of the burning of the forest and pasture areas, the ecosystem situation changes and therefore, there are too much difficulties in selecting the species to rehabilitate them.
<b>Expected outputs</b>	Collection of information in selection of adapted species to rehabilitate the burned forest and pasture areas in order to achieving success.
<b>Required technologies</b>	<ul style="list-style-type: none"> <li>■ Importing of modern seedling cultivation systems;</li> <li>■ Training of 2 specialists.</li> </ul>
<b>Adaptation potential</b>	High

<b>Project 4</b>	<b><i>Study of genetically variation among forest tree species and inside each species.</i></b>
<b>Sector</b>	Land Use Change and Forestry
<b>Objective</b>	Enhancement of adaptation capabilities of forests through selection of best adapted forest tree species and races to the expected climate changes.
<b>Country</b>	ALBANIA
<b>Budget</b>	0.09 million USD
<b>Description:</b>	There is no study on the genetically variation among forest tree species and inside of each one to identify them and to use them afterwards in adapting conditions.
<b>Expected outputs:</b>	The best possibility to select the most adapted forest tree species and races to the various expected climate changes.
<b>Required Technologies:</b>	<ul style="list-style-type: none"> <li>▪ Equipment;</li> <li>▪ Training of 2 specialists.</li> </ul>
<b>Adaptation potential</b>	High

<b>Project 5</b>	<b><i>Forest tree provenance and progeny tests in different climate conditions</i></b>
<b>Sector</b>	Land Use Change and Forestry
<b>Objective</b>	Enhancement of adaptation capability of forests through selection and planting of the best adapted forest tree provenance and progeny to the expected climate changes.
<b>Country</b>	ALBANIA
<b>Budget</b>	0.12 million USD
<b>Description:</b>	There is no study and experiment on the forest tree species provenance and progeny, to have their results and to use them afterwards in adapting conditions.
<b>Expected outputs:</b>	The best possibility to select the most adapted forest tree specie provenances and progenies to the different expected climate changes.
<b>Required technologies:</b>	<ul style="list-style-type: none"> <li>▪ Importing of modern seedling cultivation systems;</li> <li>▪ Training of 2 specialists.</li> </ul>
<b>Adaptation potential</b>	Too High

<b>Project 6</b>	<b><i>Experimentation of fast-growing species to better adapt to the expected climate changes</i></b>
<b>Sector</b>	Land Use Change and Forestry
<b>Objective</b>	Enhancement of adaptation capabilities of forests through selection and planting of the best adapted fast-growing species to the various expected climate changes.
<b>Country</b>	ALBANIA
<b>Budget</b>	0.12 million USD
<b>Description:</b>	There are some experiments and their results on planted fast -growing species such as: hybrid poplars, Monterey pine, Douglas fir and etc.
<b>Expected outputs:</b>	The best possibility to select the most adapted fast -growing forest tree species to the various expected climate changes.
<b>Required Technologies:</b>	<ul style="list-style-type: none"> <li>▪ Import of fast-growing species seeds;</li> <li>▪ Import of modern seedling cultivation systems;</li> <li>▪ Training of 1 specialist.</li> </ul>
<b>Adaptation potential</b>	High



## HEALTH

<b>Project 1</b>	<b><i>Improvement of health services infrastructure</i></b>
<b>Sector</b>	Health Service
<b>Objective</b>	Improvement of health services through the upgrade of health centers, their supply, training of medical and paramedical personnel, the quality of the service, diagnosis and treatment of diseases.
<b>Country</b>	Albania
<b>Budget</b>	Cost not known exactly
<b>Description</b>	Building health centers in every commune will improve the health service to the community. Training medical personnel with adequate curricula will improve the quality of the service. The supply with some medical equipment will make possible the performance of some laboratory examinations that will fulfill the needs of the patients and doctors in setting the diagnosis.
<b>Expected outputs</b>	Through these interventions the patients will get a qualitative health service in their community by saving time (avoiding hospital) and a quick recovery or amelioration of the health.
<b>Required Technologies</b>	Medial equipment like: blood, urine and sugar in blood testers, thermometer, and laryngoscope will improve doctors job in setting quickly and correctly the diagnosis. Training of the personnel for the maintenance of this equipment is necessary.
<b>Adaptation potential</b>	High

<b>Project 2</b>	<b>Prevention of vector diseases</b>
<b>Sector</b>	Health service and local government
<b>Objective</b>	Study of the disease-causing vectors and their growing possibilities through intervention programs that will help their elimination and prevention.
<b>Country</b>	Albania
<b>Budget</b>	Cost not known exactly
<b>Description</b>	Groups of specialists (biologists, of public health, epidemiologists, and veterinarians) will study the zones, growing places and biologic development cycles of the disease-causing vectors. The specialists will compose programs and schedules for treating the growing zones of the disease-causing vectors. The specialists will define the tools, equipment, and pesticides to elaborate the growing places of the vectors.
<b>Expected outputs</b>	Decrease in number of disease causing-vectors will be achieved through treatment of the growing and multiplication places of their species, thus eliminating the possibility of the transmission of diseases through these vectors.
<b>Required Technologies</b>	Vehicles, spray for sprinkling the growing and multiplication zones of the disease-causing vectors and their utilization with appropriate pesticides will bring the elimination of vectors and diseases (malaria, hemorrhagic fever, etc). Training of the personnel will make possible that the treatment of the zones with vectors will not pollute the environment (earth, water, plants).
<b>Adaptation potential</b>	High

## GEOGRAPHICAL INFORMATION SYSTEM (GIS)

<b>Project title</b>	<b><i>Geographical Information System (GIS)</i></b>
<b>Sector</b>	Cross-cutting
<b>Objective</b>	Use of Geographical Information System (GIS) to collect, manage, retrieve, integrate, manipulate, combine, visualize and analyze spatial data.
<b>Country</b>	Albania
<b>Budget</b>	Cost not known exactly
<b>Description</b>	<p>GIS combines computer mapping and visualization techniques with spatial databases and statistical, modeling and analytical tools. It offers powerful methods to collect, manage, retrieve, integrate, manipulate, combine, visualize and analyze spatial data. It derives information from these data that help to assess the expected vulnerabilities of climate changes.</p> <p>First-order application of GIS in coastal adaptation would be overlaying scenarios of sea level rise with elevation and coastal development data to define impact zones. More sophisticated application may include morpho-dynamic modeling. GIS technology is evolving rapidly and is increasingly used for sophisticated modeling. GIS can provide excellent support to coastal managers for making decisions about adaptation. Collected data can be stored in a GIS, combined to develop new insights and information, and visualized for interpretation. GIS can assist planners to identify appropriate adaptation technologies as well as their optimal location for implementation.</p>
<b>Expected outputs</b>	There is no doubt that GIS offers a great potential for society wishing to anticipate and understand the consequences of climate changes to cope with the potential impacts.
<b>Required Technology</b>	Geographical Information System technology.
<b>Adaptation potential</b>	Too High

- Albanian EU Energy Efficiency Centre (1999). Energy Survey in Households Sector.
- Albanian EU Energy Efficiency Centre (2001). Energy Promotion for Renewable Energy Sources-Solar Energy.
- Arreghini, R.I.; Bajuk, M.; Calderon, A.D. (1992). Cultivo de alamos consociados con pastures. Poplar and willow growing in combination with agriculture. Proceeding, Volume I. 9th Session of the International Poplar Commission. Zaragoza, 22-25.IX.1992.
- Balla,R; Dermani, V.; Karadumi, S. (1987,1986) - Pyllezimet. Pjesa e I-re, II-te. Tirane, 1987, 1986.
- CTI (2002). Methods for Climate Change Technology Transfer Needs Assessments and Implementing Activities: Experiences of developing and transition countries.
- CTI (March 2002). Methods for Climate Change Technology Transfer Needs Assessments and Implementing Activities. Developing and Transition Country Approach and Experiences.
- Decision of Council of Ministers, dated 19.01.2003 on “Energy Building Code”.
- Decision of Council of Ministers No.224, dated 26.06.2003 on “National Energy Strategy”.
- Demiraj, E.at all,1996. Implications of Climate Change for the Albanian Coast. UNEP, Athens,1996.
- Evrard, R. Planting and sylvan conduct of poplars. Poplar and willow growing in combination with agriculture. Proceeding, Volume I. 19th Session of the International Poplar Commission. Zaragoza, 22-25.IX.1992.
- FCCC, 1999: Coastal adaptation technologies. Technical paper. FCCC/TP/1999/1.
- Ministry of Agriculture and Food, 1999, Green Strategy,
- Grup autoresh, 1975, Klima e Shqiperisë. Tiranë.
- HDPC, 2002. The Albanian Response to the Millennium Development Goals. Prepared for the UN System in Albania by the Human Development Promotion Center (HDPC), Tirana, May 2002.
- Institute of Chemical Technology (2002). Feasibility study of the polluted areas in Albania.

- Institute of Chemical Technology (2002). Monitoring of emissions into air/water/soil from the industrial enterprises.
- IPCC (2000). IPCC Special Report: Methodological and technological issues in technology transfer.
- IPCC (2000). Summary for Policymakers. Methodological and Technological Issues in Technology Transfer. A special Report of IPCC Working Group III.
- IPCC (2001). Climate Change 2001: Mitigation: Impacts, Adaptation and Vulnerability. The Scientific Basis. Geneva ([www.usgcrp.gov/ipcc/wg-2spm.pdf](http://www.usgcrp.gov/ipcc/wg-2spm.pdf)).
- IPCC (1996). Revised Guidelines for National Greenhouse Gases Inventories: Reference Manual.
- IPCC (1996). Technologies, Policies and Measures for Mitigating Climate Change.
- Karadumi,S. (1985). Mbi gjendjen dhe zhvillimin e pylllezimin te kryera me Pishe te zeze, Pishe e ger, Pishe e bute, Pishe deti dhe Plep. Raport shkencor, Tirane, 1985.
- Karadumi,S. (1991). Mundesite e perhapjes te llojeve pyjore me ritje te shpejte. Raport shkencor. Stacioni i Pyjeve dhe Kulturave Eterovajore, Tirane 1991.
- Karadumi,S. (2001) Eksperimentimi i llojeve dhe prejardhjeve me rritje te shpejte. Raport shkencore. Instituti i Kerkimeve Pyjore dhe Kullotave. Tirane 2002.
- KMM, etj. Shqiperia, Administrimi i Integruar i Zones Bregdetare: Raport Perfundimtar. Faza e pare.
- Kojo Agyemang-Bonsu W., (2002). Ghana's Technology Transfer Needs Assessment. Report on Scoping Phase. April, 2002.
- Luarasi G. (2000). A brief report on cleaner production and technology status in Albania: 2nd Regional Expert Meeting on Development of National Cleaner Technology Strategise, CEE & NIS.
- Luarasi G. (2000). Industrial chemical substances inventory (Ministry of Public Economy and Privatisation).
- Luarasi G. (2003). Pollution problem caused by factories of leather processing in Albania.

- Metallurgical Institute (2001). State of the art of the metallurgical industry in Albania.
- Ministry of Environment (1997 – 1998, 1999-2000). State of the Environment Report.
- Ministry of Public Economy & Privatisation (1992 – 2001). Annual bulletins.
- Ministry of Agriculture and Food of Albania (2002). The Statistical Yearbook.
- Ministry of Agriculture and Food (2002). Annual Report. Tirana.
- Ministry of Environment (2002). The First National Communication of Albania to the United Nations Framework Convention on Climate Change.
- National Energy Agency (2000). Harmonization of Energy Statistics in Industry.
- National Energy Agency (2003). National Strategy of Energy.
- National Environmental Agency (1996). National Waste Management Plan for Albania.
- National Environmental Agency (1998 – 1999). Organization of the Urban Waste Management in 6 Main Albanian Municipalities: a Model Applicable to Towns of Other Developing Countries.
- National strategy of social and economic development, NSSD Albania Government Document, November 2001.
- PKKZH (2002). Rritja e efektivitetit te informacionit meteorologjike PK-KZh-PN1.
- Ravindranath, N.H. (2000). Forestry Sector. Methodological and Technological Issues in Technology Transfer. A special Report of IPCC Working Group III. Cambridge University Press.
- Shaw, J., R.B. Taylor, D.L. Forbes, M.H. Ruz and S. Solomon (1998). Sensitivity of the Coasts of Canada to Sea-Level Rise. Geological Survey of Canada, Bulletin No 505, 79 pp.
- Smit, B., I. Burton, and R. Klein (1998). The Science of Adaptation: A Framework for assessment. Background paper for the IPCC Workshop on Climate Variability and Change. San Jose, Costa Rica, 1998.

- Themelko B. (1983). Racionalizimi i rrjetit meteorologjik. Disertacion, Tirana.
- Thomas, T.H. Willis, R.W. Slykan, J.van. The potential for poplars based agrisilvopastoral systems on arable lands in the United Kingdom. Poplar and willow growing in combination with agriculture. Proceeding, Volume I. 19th Session of the International Poplar Commission. Zaragoza, 22-25.IX.1992.
- UNDP (2003). Simple Steps, Effective Actions. A UNDP/GEF Handbook on Methodologies for Technology Needs Assessments. Final draft, January 2003.
- UNDP/GEF (2002). Simple steps, effective actions: Understanding technology needs assessment A UNDP/GEF Handbook on methodologies for technology needs assessments. UNDP-GEF 1st Draft, 1 August 2002.
- UNEP (1999). Economics of GHG Limitations: Methodological guidelines.
- UNEP (1995). Remote Sensing for the Mediterranean. Palermo.
- UNEP (1996). Report on Results of the Coastal Areas Management Programme (CAMP) for Albania. UNEP, Athens, 1996.
- UNEP/Riso (1998). Guidelines for Mitigation Studies.
- UNFCCC Secretariat (1999). Compendium of Decision Tools to Evaluate Strategies for Adaptation to Climate Change. Final Report. Bonn, Germany, May 1999.
- Vega, J.C.; Arreghini, R.I.-Alamos consociades con hortalizas. Parte I: Repollo; Parte II: Cebolla. Poplar and willow growing in combination with agriculture. Proceeding, Volume I. 19 th Session of the International Poplar Commission. Zaragoza, 22-25.IX.1992.
- Watson. R, M.C. Zinyowera and R.H. Moss (1996). Climate change 1995: Impacts, Adaptation and Mitigation of Climate Change: Scientific Technical Analysis. Contribution of Working Group II to the Second Assessment Report of the IPCC. Cambridge University Press, Cambridge.



